

TPS DC non-indicating power distribution fuses





Catalog symbols:

- TPS-_ (ferrule)
- TPS-_L (horizontal PCB tab)
- TPS-_V (vertical PCB tab)
- TPS-_LB (bolt tag)

Description:

TPS DC power distribution non-indicating fuses specifically designed to meet the unique needs of DC power distribution systems. Available in ferrule, vertical and horizontal PCB tab and bolt tab configurations

Specifications:

Ratings

- Volts
- 170 Vac/dc (up to 60 A)
- 170 Vdc (70 to 80 A)
- Amps 1 80 A
- IR 100 kA

Agency information

- UL® Recognized, Guide JFHR2, File E56412
- RoHS Compliant
- CE

Features

- TelpowerTM fuse line is the first to be specifically designed to meet the unique needs of DC power distribution systems
- The UL Recognized with a 100kA interrupting rating and current-limiting capability make the TPS fuse ideal for overcurrent protection on existing DC distribution systems
- A unique blue label is used on all Telpower fuses to designate their DC capability
- PCB and bolt tag versions available for application flexibility
- Silver-plated brass ferrules
- Glass melamine tube
- For use with Bussmann series fused disconnect switch 15800
- Spare fuse holder available (cat. no. TPSFH-AS)


Catalog no. (amps)			
Ferrule			
TPS-1	TPS-6	TPS-25	TPS-50
TPS-2	TPS-10	TPS-30	TPS-60
TPS-3	TPS-15	TPS-35	TPS-70
TPS-5	TPS-20	TPS-40	TPS-80
Horizontal PCB tab			
TPS-1L	TPS-6L	TPS-25L	TPS-50L
TPS-2L	TPS-10L	TPS-30L	TPS-60L
TPS-3L	TPS-15L	TPS-35L	TPS-70L
TPS-5L	TPS-20L	TPS-40L	
Vertical PCB tab			
TPS-10V	TPS-30V	TPS-50V	
TPS-15V	TPS-35V	TPS-70V	
TPS-25V	TPS-40V	TPS-80V	
Bolt tab			
TPS-1LB	TPS-40LB	TPS-60LB	
TPS-35LB	TPS-50LB	TPS-70LB	




Effective September 2017


${\bf Dimensions-in\ (mm)}$

TPS-(amp) — ferrule





TPS-(amp)L — horizontal PCB tab






TPS-(amp)V — vertical PCB tab






TPS-(amp)LB — bolt tab*

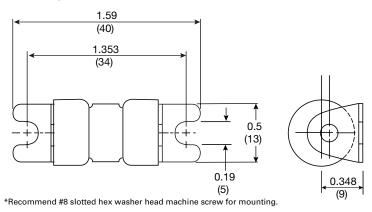

Time-current curves

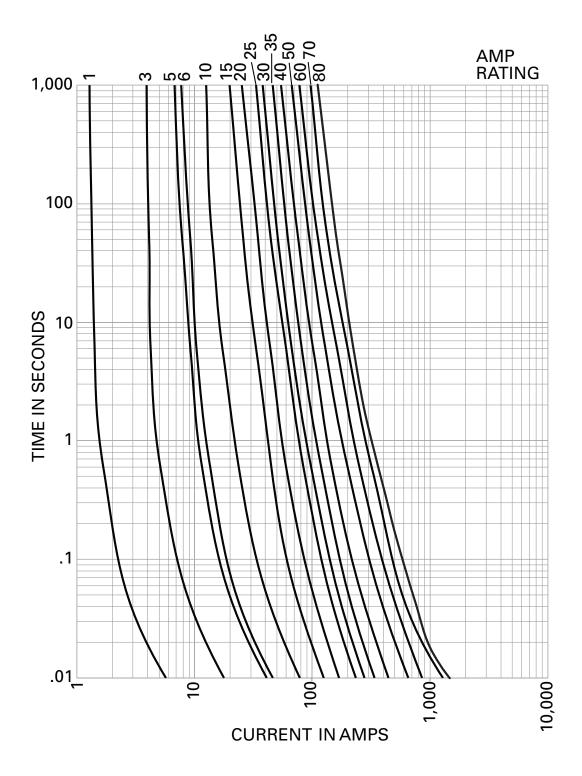

The only controlled copy of this data sheet is the electronic read-only version located on the Eaton network drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton 1000 Eaton Boulevard Cleveland, OH 44122 Eaton.com

Bussmann Division 114 Old State Road Ellisville, MO 63021 Eaton.com/bussmannseries

© 2017 Eaton All Rights Reserved Printed in USA Publication No. 5009 — BU-SB15146 September 2017

Eaton, Bussmann and Telpower are valuable trademarks of Eaton in the U.S. and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

UL is a registered trademark of the Underwriters Laboratories, Inc.

For Eaton's Bussmann series product information, call 1-855-287-7626 or visit: Eaton.com/bussmannseries

Follow us on social media to get the latest product and support information.











X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Specialty Fuses category:

Click to view products by Eaton manufacturer:

Other Similar products are found below:

63NZ02GL 714125 722134 F02A-4AS F02B-1A 80NH00GR-6 FWH-200A FWP-32A14F 12LCT 12TDLSJ63 REN-3 15.5CAVH2E

ECF-1 ECF-2 ECF-3 ECF-4 170M0213 170M1369-D 170M3809D BK/F02B-1A N-2-1/2 N-3-2/10 NITD2 20D16 KAA-3 KAB-30

KAW-3 2D16 LKN-125B 16D27SB 16FC 170M1564D 170M2616 170M2668 170M4161 170M4241 170M4699 ESD63 ABS-30 ABS-8

ACF-15 ACF-30 ACO-30 F02A-10A SSD10 200NH1M FWP-25A14FI FWP-40A14FI FWP-500A FWP-63A22FI