

Description

- Miniature size and rugged construction
- Low DCR and high efficiency
- Suited for IR and vapor reflow solder
- Designed for high shock environments
- Frequency range 1kHz to 2MHz
- Ferrite core material



Applications

- DC-DC converters
- Filter inductors
- Signal conditioning
- Energy storage applications
- Computer, pager and battery powered equipment

Environmental Data

- Storage temperature range: -40°C to +125°C
- Operating ambient temperature range: -40°C to +85°C range is application specific. Temperature rise is approximately 40°C at rated RMS current. Maximum operating temperature is 125°C including ambient.
- Solder reflow temperature: +260°C max. for 10 seconds max.



Packaging

- Supplied in tape and reel packaging, 1,750 per reel

Part Number	Inductance μH (Rated)	OCL (1) μH ± 20%	I _{rms} (2) Amperes	I _{sat} (3) Amperes	DCR (4) Ohms (Max.)
UP2.8B-1R0-R	1.0	0.98	3.6	8.0	.0286
UP2.8B-1R5-R	1.5	1.59	3.3	6.4	.0349
UP2.8B-2R2-R	2.2	2.44	3.1	5.2	.0356
UP2.8B-3R3-R	3.3	3.24	2.8	4.5	.0474
UP2.8B-4R7-R	4.7	4.15	2.7	3.9	.0478
UP2.8B-6R8-R	6.8	6.73	2.4	3.2	.067
UP2.8B-100-R	10	10	2.1	2.7	.080
UP2.8B-150-R	15	15	1.7	2.2	.120
UP2.8B-220-R	22	22	1.5	1.7	.190
UP2.8B-330-R	33	33	1.3	1.5	.250
UP2.8B-470-R	47	47	1.0	1.2	.340
UP2.8B-680-R	68	68	.89	1.0	.480
UP2.8B-101-R	100	100	.78	.84	.622
UP2.8B-151-R	150	150	.62	.74	.971



1) Open Circuit Inductance Test Parameters: 100kHz, 0.250 Vrms, 0.0 Adc

2) RMS current, delta temp. of 40° C ambient temperature of 85° C


3) Peak current for approximately 10% roll-off @ 20°C

4) Values @ 20° C

Mechanical Diagrams

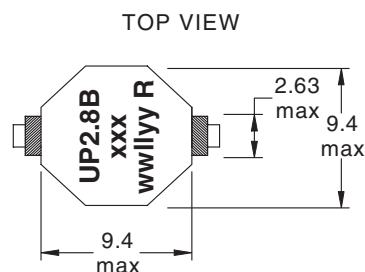

Recommended PCB Layout



Component View

Dimensions in Millimeters.
 wwlyy = date code R = (revision level)
 xxx = Inductance value per family chart

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Eaton](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#)
[RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#)