

Product Data Sheet 6424/2HP-210

ebmpapst

Die Wahl der Ingenieure



6424/2HP-210

INDEX

1	General	3
2	Mechanics	3
2.1	General	3
2.2	Connections	3
3	Operating Data	4
3.1	Operating Data - Electrical Interface - Input	4
3.2	Electrical Operating Data	5
3.3	Operating Data - Electrical Interface -Output	6
3.4	Electrical Features	7
3.5	Aerodynamic	8
3.6	Sound Data	8
4	Environment	9
4.1	General	9
4.2	Climatic requirements*)	9
5	Safety	10
5.1	Electrical Safety	10
5.2	Approval Tests	10

1 General

Fan type	Fan	
Rotational direction looking at rotor	counterclockwise	
Airflow direction	Air outlet over struts	
Bearing system	Ball bearing	
Mounting position	any	


2 Mechanics

2.1 General

Width	150,0 mm	
Depth	51,0 mm	
Diameter	172,0 mm	
Weight	0,760 kg	
Housing material	Metal	
Impeller material	Plastic	
Max. torque when mounted across both mounting flanges	wire outlet corner: 260 Ncm remaining corners: 260 Ncm	
Screw size	ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Wires - Plug	
Length of lead wire		
Tolerance		
Wire gauge (AWG)	22	
Insulation diameter	1,70 mm	
Contact	see drawing	

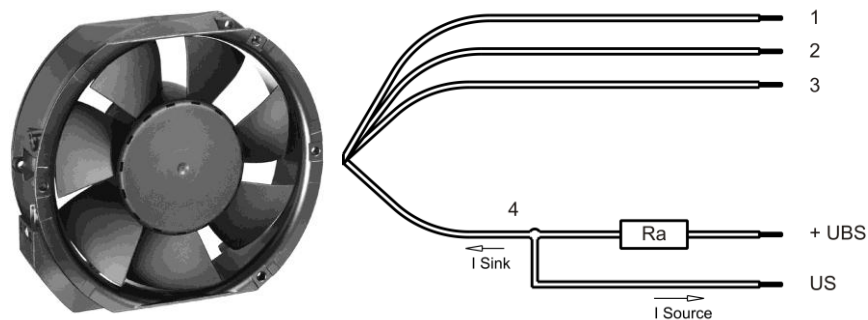

	Colour	Operation
Wire 1	red	+ UB
Wire 2	blue	- GND
Wire 3	violet	PWM
Wire 4	white	Tacho

The auxiliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.

3 Operating Data

3.1 Operating Data - Electrical Interface - Input

Control input	PWM
---------------	-----

Features

PWM - Frequency	1 kHz - 10 kHz Typical: 2 kHz
-----------------	----------------------------------

Characteristics	
Schematics	

Speed control:

0... 100% PWM; f: 2 kHz; open collector
 Alternatively: Resistor to GND (33 mW) 0... oo kOhm

Transistor requirements:

V CE sat < 0,15 V; V CE max. 12 V; I sink max. 5 mA

3.2 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$: corresp. to free air flow (see section 3.5)
I: corresp. to arithm. mean current value

Name	Condition
PWM 0001	PWM: 100 %;

Features	Condition	Symbol	Values		
Voltage range	$\Delta p = 0$	U	12,0 V		28,0 V
Nominal voltage	$\Delta p = 0$	U_N		24,0 V	
Power consumption	$\Delta p = 0$	P	7,0 W	31,4 W	35,6 W
Tolerance	PWM 0001		+/- 15,0 %	+/- 12,0 %	+/- 10,0 %
Current consumption	$\Delta p = 0$	I	580 mA	1.310 mA	1.270 mA
Tolerance	PWM 0001		+/- 15,0 %	+/- 12,0 %	+/- 10,0 %
Speed	$\Delta p = 0$	n	2.280 1/min	4.270 1/min	4.410 1/min
Tolerance	PWM 0001		+/- 15,0 %	+/- 12,0 %	+/- 10,0 %
Starting current consumption				1.800 mA	
Inrush current				5.500 mA	

100% PWM; f: 2 kHz or broken control lead (open control input)


Name	Condition
PWM 0002	PWM: 50 %;

Features	Condition	Symbol	Values		
Voltage range	$\Delta p = 0$	U	12,0 V		28,0 V
Nominal voltage	$\Delta p = 0$	U_N		24,0 V	
Power consumption	$\Delta p = 0$	P	5,0 W	5,5 W	5,9 W
Tolerance	PWM 0002		+/- 15,0 %	+/- 12,0 %	+/- 10,0 %
Current consumption	$\Delta p = 0$	I	420 mA	230 mA	210 mA
Tolerance	PWM 0002		+/- 15,0 %	+/- 12,0 %	+/- 10,0 %
Speed	$\Delta p = 0$	n	1.970 1/min	2.000 1/min	2.010 1/min
Tolerance	PWM 0002		+/- 15,0 %	+/- 12,0 %	+/- 12,0 %

3.3 Operating Data - Electrical Interface -Output

Tacho type	/2 (Open collector)
------------	---------------------

Signal-Ausgangsspannung / Signal output voltage

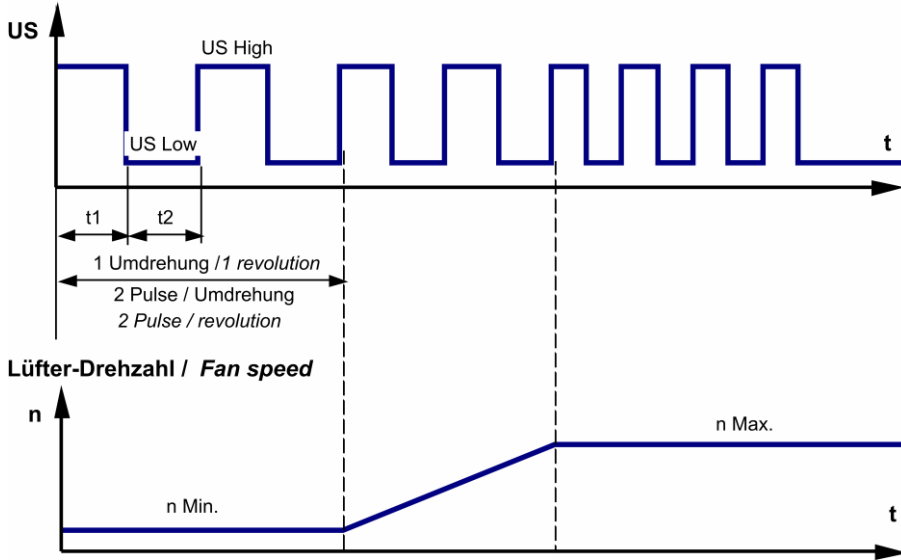


$$R_a = \frac{U_{BS} - US_{Low}}{I_{Sink}}$$

Features	Note	Values
Tacho operating voltage (UBS)		<= 60 V
Tacho signal Low	I sink: 2 mA	<= 0,4 V
Tacho signal High	I source: 0 mA	<= 60 V
Maximum sink current		<= 20 mA
External resistor	External resistor Ra from UBS to US required. All voltages measured to GND.	
Tacho frequency	(2 x n) / 60	
Tacho isolated from motor	No	
Slew rate		=> 0,5 V/us

Alarm type	None
------------	------

3.4 Electrical Features

Electronic function	Speed-Controlled	
Reversed polarity protection	Rectifying diode	
Max. residual current at U_n	$I_F \leq 10 \text{ mA}$	
Locked rotor protection	Auto restart	
Locked rotor current at U_n	approx. 2.500 mA	
Clock signal t_3/t_4 at locked rotor	Typical: 0,5 s / 5,0 s	

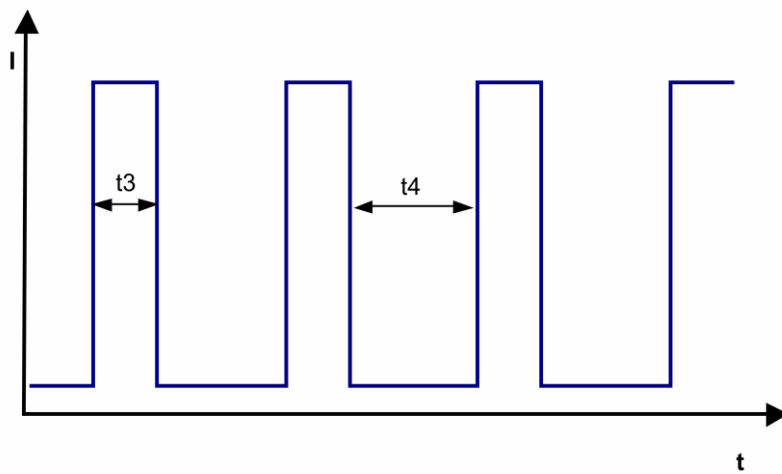

3.5 Aerodynamic

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801.
 Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C;
 In the intake and outlet area should not be any solid obstruction within 0,5 m.
 The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

4.270 1/min at free air flow	PWM 100 %;		
Max. free-air flow ($\Delta p = 0 / \dot{V} = \max.$)		490,0 m ³ /h	
Max. static pressure ($\Delta p = \max. / \dot{V} = 0$)		245 Pa	

3.6 Sound Data

Measurement conditions: Sound pressure level: 1 Meter distance between microphone and the air intake.
 Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)
 Measured in a semianchoic chamber with a background noise level of L_p(A) < 5 dB(A)
 For further measurement conditions see section 3.5

a.) Operation condition:

4.270 1/min at free air flow	PWM 100 %	PWM min.:	PWM max.:
Optimal operating point		325,0 m ³ /h @ 100 Pa	
Sound power level at the optimal operating point		7,0 bel(A)	
Sound pressure level at free air flow, measured in rubber bands		62,0 dB(A)	

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-20 °C	
Max. permitted ambient temperature TU max.	72 °C	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic requirements *)

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days	
Water exposure	None	
Dust requirements	None	
Salt fog requirements	None	

*) Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact. Please require severity levels and specification parameters from the responsible development departments

5 Safety

5.1 Electrical Safety


Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	500 VAC / 1 Min. 500 VAC / 1 Sec.	
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 10 MOhm	
clearance / creepage distance	1,0 mm / 1,2 mm	
Protection class	III	

5.2 Approval Tests


CE	EC Declaration of Conformity	Yes
EAC	Eurasian Conformity	Yes
UL	Underwriters Laboratories	Yes / UL507, Electric Fans
VDE	Association for Electrical, Electronic and Information Technologies	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Canadian Standards Association	Yes / C22.2 No. 113 Fans and Ventilators
CCC	China Compulsory Certification	No

Design of the housing and pins 1 to 4 are subject to change without notice. The dimensions of the housing are subject to change without notice.

Schritzwinkel nach DIN ISO 16043 beachten

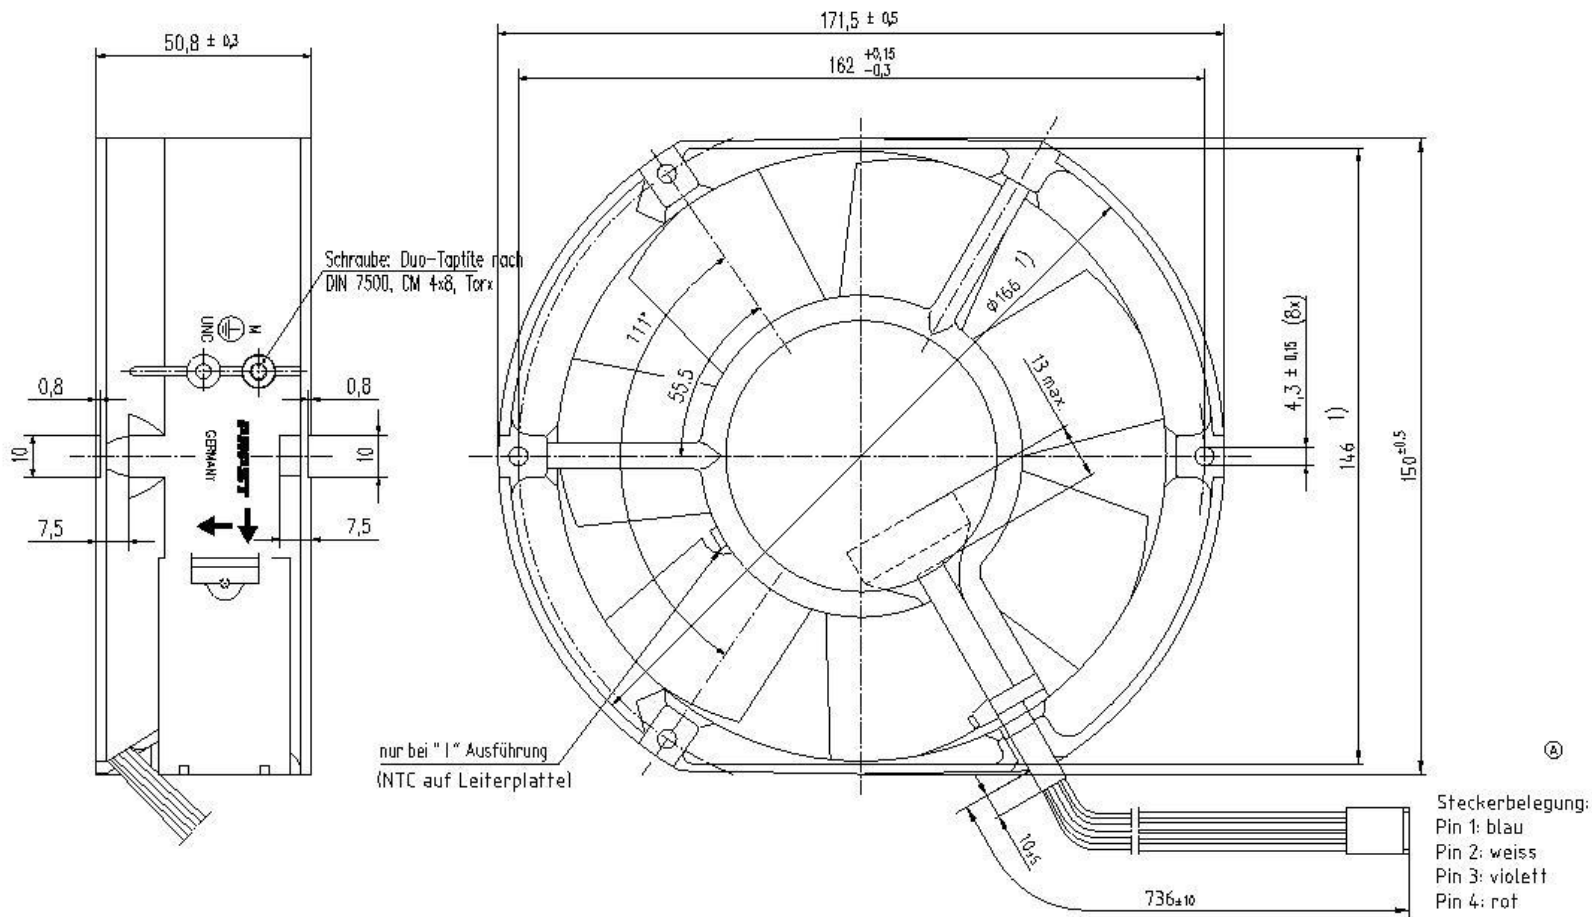

1) Maße für Montagewand
 Axialspiel: mit Feder spielfrei verspannt

Tolerierung: DIN 7167			
Allgemeintoleranzen: DIN ISO 2768-mK-E			
			Artikel
			Maßstab
Bearbeitet	Datum	Name	Zchg.-Nr.
	Index	Änd.-Nr.	Blatt
Geprüft u. zur Verwendung freigegeben von		PAPST PAPST-MOTOREN GmbH & Co KG D-78112 St. Georgen Germany	
an		Ersf.Zchg:	
		A3	