

VD motor.

VD-49.15-K1



- 3-phase external rotor motor with EC technology
- High poled motor structure for optimum power density
- Basic motor with electronic module K1 for operation on external control electronics
- Very good synchronization characteristics
- Robust mechanical design in IP 54 for industrial applications
- Long lifetime by using precision ball bearings
- Insulation class E
- Electrical connection via cable


Nominal data			VD-49.15-K1-B00	VD-49.15-K1-D00
Type				
Nominal voltage (U_N)	V DC		24	48
Nominal speed (n_N)*	rpm		4 500	5 300
Nominal torque (M_N)*	mNm		235	245
Nominal current (I_N)*	A		6.10	3.40
Nominal output power (P_N)*	W		110	135
Starting torque (M_{max})	mNm		1 150	1 300
Permissible peak current (I_{max})**	A		30.0	18.5
Speed at no-load operation (n_0)	rpm			6 000
No-load current (I_0)	A		0.47	0.36
Recommended speed control range	rpm			0 ... 6 000
Rotor moment of inertia (J_R)	kgm ² x10 ⁻⁶			108
Motor constant (K_E)	mVs/rad		41.0	80.7
Connection resistance (R_V)	Ω		0.23	0.62
Connection inductance (L_V)	mH		0.17	0.62
Overload protection			To be implemented via the control electronics	
Permissible ambient temperature range (T_U)	$^{\circ}\text{C}$		0 ... +40	
Weight	kg		0.59	
Order no. (cable type)***	IP 54		937 4915 000	937 4915 001

Subject to alterations

* At T_U max. 40 $^{\circ}\text{C}$
 ** Permissible time for peak current: max. 1 sec. – to be repeated only after complete cool down
 *** Classification of protection class refers to installed state with sealing on the flange side


Characteristic curve

VD-49.15-K1-B00 (at 25 $^{\circ}\text{C}$)

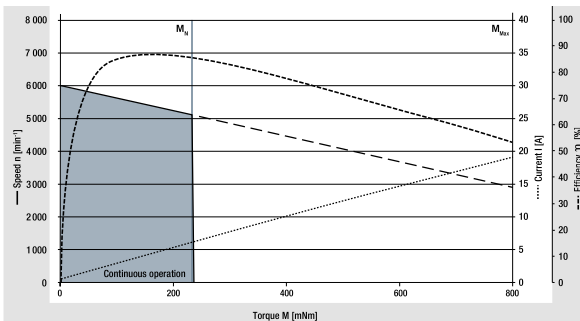

¹⁾ Nominal data, see table


VD-49.15-K1-D00 (at 25 $^{\circ}\text{C}$)

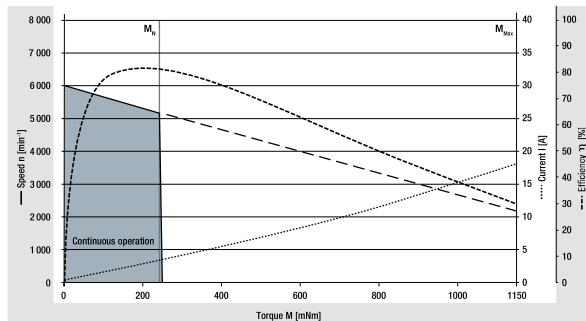

¹⁾ Nominal data, see table

Technical drawing

All dimensions in mm

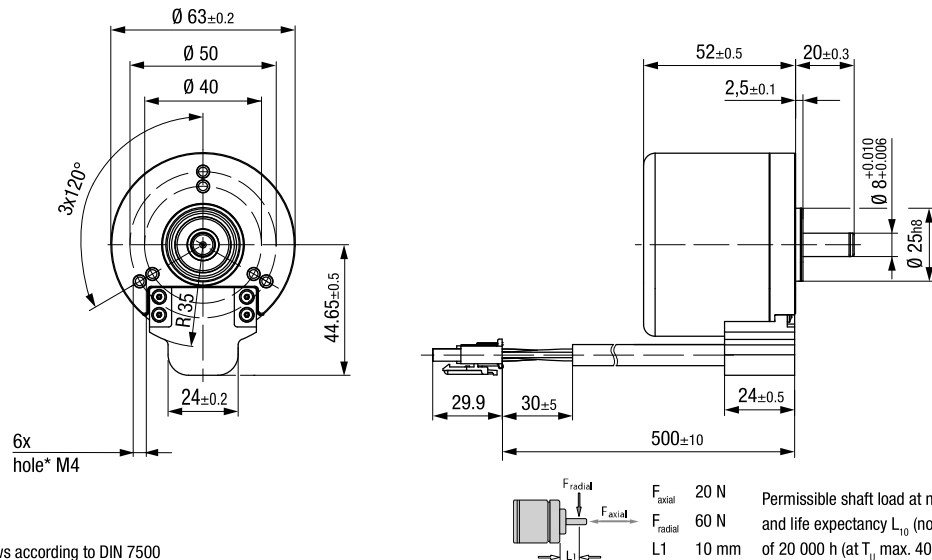


* For thread-rolling screws according to DIN 7500


Electrical connection

Supply wire

No.	Color	Function
1	yellow	Phase W
2	violet	Phase V
3	brown	Phase U



Molex plug no. 39-03-6035



Molex plug no. 39-01-2085

Signal wire

No.	Color	Function
1	–	–
2	red	+12 V
3	white	Hall B
4	green	Hall A
5	–	–
6	–	–
7	black	GND
8	gray	Hall C

Modular construction kit

Recommended external control electronics

VTD-XX.XX-K3	Speed (page 34)
VTD-XX.XX-K4S	Position (page 36)
VTD-60.13-K5SB	Position (page 38)

Basic motor



Planetary gearheads

- NoiselessPlus 63 (page 44)
- Performax® 63 (page 46)
- Performax®Plus 63 (page 48)

Crown gearheads

- EtaCrown® 75 (page 50)
- EtaCrown®Plus 63 (page 52)

Spur gearheads

- Compactline 91 (page 56)
- Flatline 85 (page 60)

Planetary gearheads.

Performax®Plus 63





Image of 2-stage gearhead

- High torques thanks to large gearing width in the first gear stage
- Good shock resistance due to housing made of case-hardened steel with linear tooth profile in the output stage
- Very quiet running due to helical teeth in the first gear stage
- Planetary wheels made of plastic with optimized sliding properties in the first stage ensure smooth operation
- Large effective diameter thanks to radial screw connection

Nominal data												
Gearheads		Performax®Plus 63.1					Performax®Plus 63.2					
Reduction ratio		3.20	5.00	9.00	17.0	21.3	30.0	38.3	54.0	72.3	102	204
No. of stages		1					2					
Efficiency		0.90					0.81					
Max. input speed (n _i)	rpm	6 000					6 000					
Rated output torque (M _{ab})	Nm	6.50	11.9	7.60	4.40	45.2	64.0	28.9	41.0	16.9	23.9	27.4
Short-term torque (M _{max})	Nm	16.3	29.8	19.0	11.0	113	160	72.3	102.5	42.3	59.8	68.5
Gear play	°	0.7 ... 1.2					0.7 ... 1.2					
Permissible operating temperature (T _v)	°C	-20 ... +80					-20 ... +80					
Operating mode		S1					S1					
Protection class		IP 50					IP 50					
Weight	kg	0.66					1.20					
Shaft load radial / axial	N	350 / 500					350 / 500					
Service life	h	5 000					5 000					
Lubrication		Maintenance-free grease lubrication for life										
Installation position		any										
Subject to alterations		on request										

Technical drawing

Image of 1-stage gearhead / 2-stage design completely cylindrical / All dimensions in mm

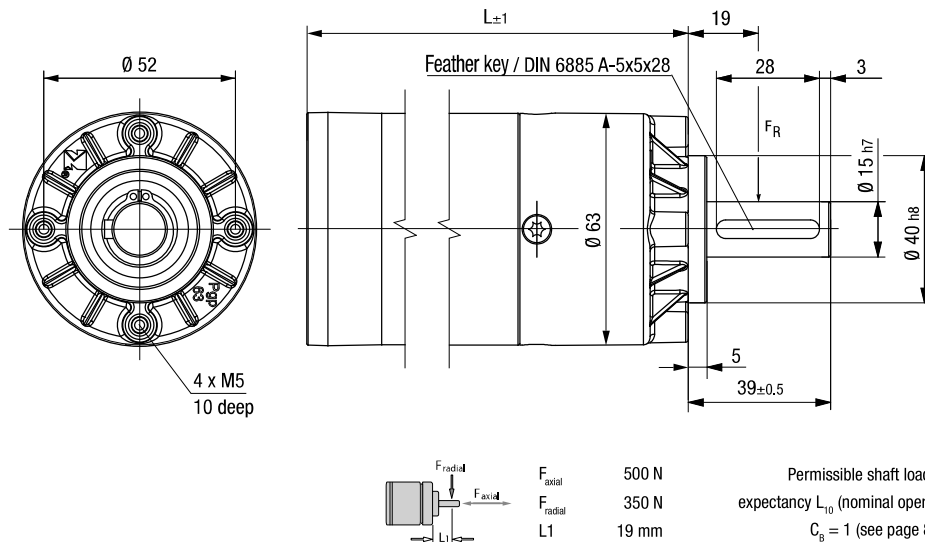

F_{axial} 500 N
 F_{radial} 350 N
 $L1$ 19 mm

Permissible shaft load at nominal speed and life expectancy L_{10} (nominal operation) and operating factor $C_b = 1$ (see page 82) of 5 000 h (at T_u 40°C).

Length of the possible motor / gearhead combinations

Motor / gearhead		L - 1-stage	L - 2-stage
ECI-63.20-K1-PP63	mm	164	185
ECI-63.40-K1-PP63	mm	184	205
ECI-63.60-K1-PP63	mm	204	225
ECI-63.20-K3-PP63	mm	176	198
ECI-63.40-K3-PP63	mm	196	218
ECI-63.60-K3-PP63	mm	216	238
ECI-63.20-K4-PP63	mm	176	198
ECI-63.40-K4-PP63	mm	196	218
ECI-63.60-K4-PP63	mm	216	238
ECI-63.20-K5-PP63	mm	170	191
ECI-63.40-K5-PP63	mm	190	211
ECI-63.60-K5-PP63	mm	210	231
ECI-80.20-K1-PP63	mm	154	175
ECI-80.40-K1-PP63	mm	174	195
ECI-80.60-K1-PP63	mm	194	215

Subject to alterations

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Industrial Panel Mount Indicators / Switch Indicators](#) category:

Click to view products by [Rafi](#) manufacturer:

Other Similar products are found below :

[LW1A-P1-W](#) [LW1B-A0L](#) [01-952.0](#) [01-152.025](#) [D38999/20FJ29PB L/C](#) [704-6012](#) [704-6020](#) [704-6023](#) [704-6026](#) [73.362.4028.0](#) [EUS-704.000.7](#) [750-1520](#) [9001OA120](#) [99-450.837](#) [99-455.837](#) [99-486.837](#) [99-901.9](#) [99-902.9](#) [99-908.0](#) [99-909.4](#) [99-909.5](#) [A0244J1](#) [A3DT-500Y](#) [AL6M-P7P-A](#) [AOLQW-2B0600](#) [AP1M255-A](#) [APD106LN-A](#) [APD106LN-G](#) [APN1126-G](#) [APS122DN-W](#) [ATN2100](#) [AYLW4L-A](#) [18-237.035](#) [C0180AANAHA](#) [HW1A-L1-GD](#) [HW1A-P2-GL](#) [HW1F-3G](#) [HW1R-2DF20-R](#) [HW1X-BM411-R](#) [HW2A-L1-GL](#) [HW2A-P1-GD](#) [HW4S-31L](#) [HWAZ1N-OB](#) [PA2200/1](#) [PA2SHIELD](#) [21-931.0](#) [21-931.2](#) [96-923.5](#) [1625006](#) [99-451.837](#)