



## DC centrifugal fans – RadiCal

Ø 190 x 69 mm

- **Material:** Impeller: GRP<sup>1)</sup>
- **Direction of air flow:** Axial: Intake, Centrifugal: Exhaust
- **Direction of rotation:** Clockwise, looking towards rotor
- **Connection:** Via single wires AWG 18, 20 or AWG 22, TR 64, speed signal and control input AWG 22
- **Highlights:** Highly efficient and smoothly operating 3-phase fan drive Backward-curved RadiCal impeller
- **Weight:** 870 g

1) Fiberglass-reinforced plastic

- **Possible special versions:**  
(See chapter DC fans - specials)
  - Speed signal
  - Go / NoGo alarm
  - Alarm with speed limit
  - External temperature sensor
  - Internal temperature sensor
  - PWM control input
  - Analog control input
  - Multi-option control input
  - Moisture protection
  - Salt spray protection
  - Degree of protection: IP 54

Series RER 190 TD

Nominal data		Air flow	Air flow	Nominal voltage	Voltage range	Sound power level	Sinterc sleeve bearings Ball bearings	Power consumption	Nominal speed	Temperature range	Service life L <sub>10</sub> (40 °C) ebm-papst standard	Service life L <sub>10</sub> (T <sub>max</sub> ) ebm-papst standard	Life expectancy L <sub>10</sub> PC (40 °C) see page 17	Curve
Type		m <sup>3</sup> /h	cfm	VDC	VDC	Bel(A)	□ / ■	Watts	rpm <sup>-1</sup>	°C	Hours	Hours		
RER 190-39/14/2 TDMLO		650	382	<b>24</b>	16...30	7.6	■	58	3 000	-20...+60	55 000 / 35 000	92 500	①	
RER 190-39/14/2 TDMO		860	506	<b>24</b>	16...36	7.9	■	110	3 900	-20...+65	52 500 / 30 000	87 500	②	
RER 190-39/18/2 TDMLO*		650	382	<b>48</b>	36...57	7.6	■	56	3 000	-20...+65	55 000 / 30 000	92 500	①	
RER 190-39/18/2 TDMO*		860	506	<b>48</b>	36...72	7.9	■	105	3 900	-20...+65	52 500 / 30 000	87 500	②	
RER 190-39/18/2 TDO		970	571	<b>48</b>	36...72	8.3	■	148	4 400	-20...+65	40 000 / 22 500	67 500	③	



Subject to change

\* On request



The air flow and sound level of the centrifugal fans without external housing depend on their individual installation conditions.

The stated air flow and sound level were recorded under the following measurement parameters:  
Centrifugal fan mounted on a foundation plate  
195 x 195 mm.

Cover plate 195 x 195 mm, with an air inlet opening Ø 125.5 mm, arranged concentrically to the impeller.

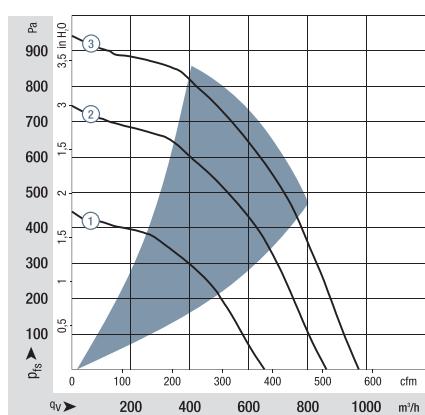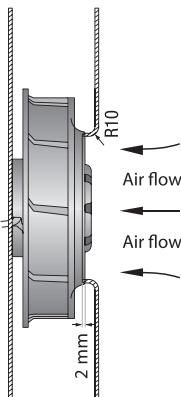

Air performance measured according to ISO 5801.  
Installation category A, with ebm-papst inlet ring without contact protection.  
Noise: Total sound power level L<sub>WA</sub>  
ISO 103002 measured on a hemisphere with a distance of 2 m;  
Sound pressure level L<sub>pA</sub> measured at 1 m distance from fan axis.  
The values given are applicable only under the specified measuring conditions and may differ depending on the installation conditions.  
In the event of deviation from the standard configuration, the parameters must be checked after installation!  
For detailed information see  
<http://www.ebmpapst.com/general conditions>

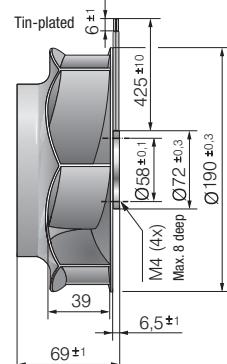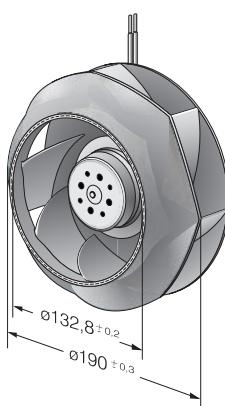

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [ebm papst manufacturer:](#)***

Other Similar products are found below :

[3312M](#) [M4Q045-DA05-E4](#) [4114N](#) [8218J/2H3](#) [W1G200-EA95-68](#) [DV6248U](#) [6224NT](#) [M4Q045-CA03-75](#) [M4Q045-CF01-75](#) [D2E133-DM27-D8](#) [8314S](#) [8506A](#) [G2E140-AL30-48](#) [R1G225-AG15-11](#) [R2D270-AB12-09](#) [R2E190-RA50-21](#) [R2E225-BD40-21](#) [R3G310-AL09-30](#) [R4E400-AP15-10](#) [REF100-11/14](#) [RER160-28/56S](#) [9496-2-4039-1](#) [A2D240-AA02-10](#) [A2D250-AA06-52](#) [G2E120-FV56-16](#) [G2E160-AY47-57](#) [G2S085-AA19-15](#) [QR06A-2/106349](#) [R1G250-AQ21-52](#) [R2E180CH0312](#) [R2E225-AT51-14](#) [R2E225-BD92-36](#) [R3G175-AF25-02](#) [LZ27](#) [RG125-19/12N/2](#) [RH31M-6/104372](#) [RH56M-6/204689](#) [3800](#) [RLF100-11/18](#) [D1G133-DC17-52](#) [D2E097-BI56-48](#) [55416.30320](#) [3314U](#) [D4E180-BA04-18](#) [4112NHH](#) [412/2H-048](#) [412FH-132](#) [W2E300-CP02-37](#) [W4D350-CA06-14](#) [422JM](#)