




EHS SERIES
HALF PITCH SMT TYPE, THE LOWEST PROFILE DIP SWITCH



EHS 1.27mm PITCH



EHS J-Hook Type

FEATURES

- Standard 0.05" integrated circuit pitch.
- Smaller size makes better heat convection during PC board soldering.
- Top tape sealed to withstand soldering, board washing.
- All plastics are UL 94V-0 grade fire retardant.
- Gold plated contact to ensure low contact resistance and long mechanical life.
- RoHS Compliant

APPLICATIONS

- Hand-held electronic devices, such as PDA, MP3, radios
- Portable computer and electronic devices, such as notebook, computers
- Instrumentation and industrial control products, such as CDROM, coin changers

SPECIFICATIONS

1.ELECTRICAL


● Contact rating	switching	25mA, 24VDC
	non-switching	100mA
● Contact resistance(Initial)	100mΩ Max.	
● Insulation resistance	500MΩ Min. at 100VDC	
● Dielectric strength	300VAC Min. for 60 seconds	
● Capacitance between adjacent switches 5pF Max.		



2.MECHANICAL and ENVIRONMENTAL


● Temperature rating	operation	-40°C to +85°C
	storage	-40°C to +85°C
● Operation force		800g Max.
● Mechanical life		1000 operations
● Humidity		95% RH, 40°C for 96Hrs.
● Vibration		10Hz-55Hz-10Hz for 6Hrs.
● Reflow soldering heart for SMT type (reference only)		240°C for 20 seconds or less, peak temperature 260°C or less

■ PART NUMBERING SYSTEM

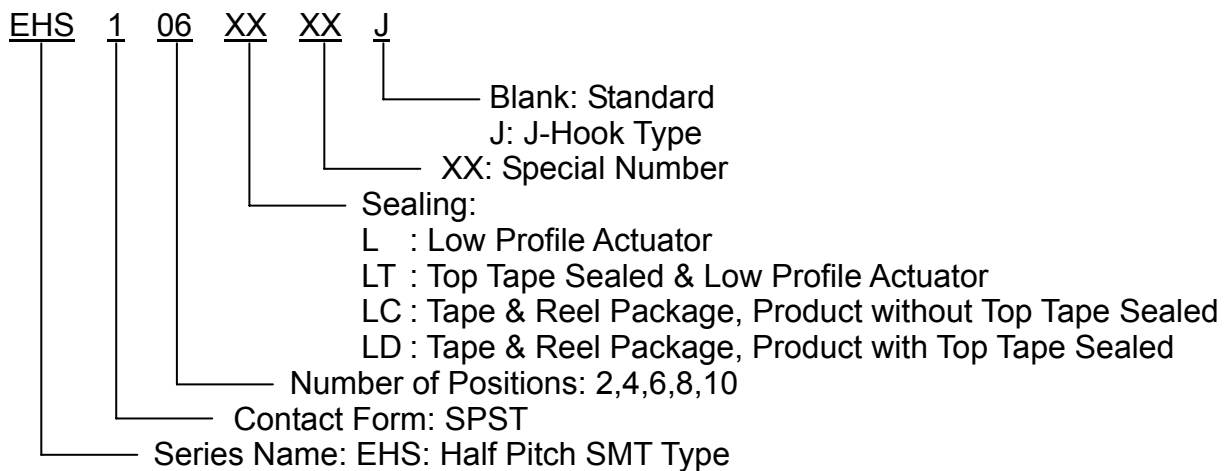


CONSTRUCTION

EHS

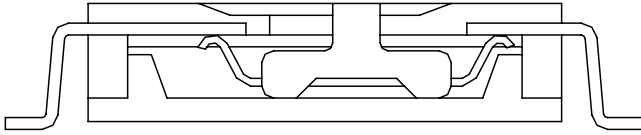


EHS J TYPE

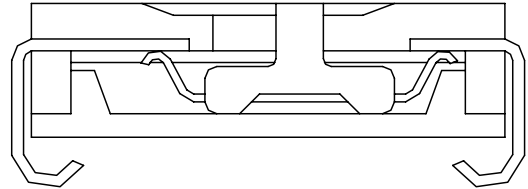

OPTIONS


1. Special marking and case color available

2. Top Tape Sealed





PACKAGING

1. Tape & Reel Packaging (Per EIA STANDARD)

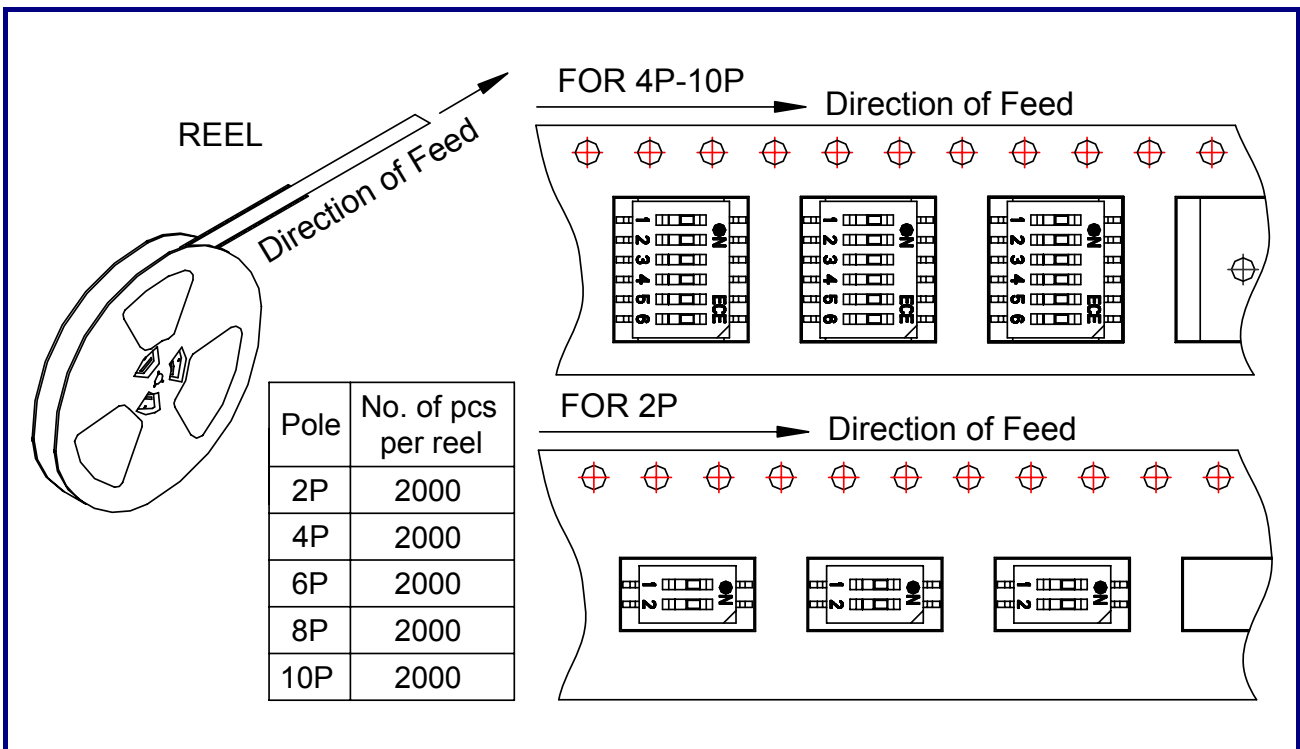

■ DIMENSIONS AND CIRCUITRY

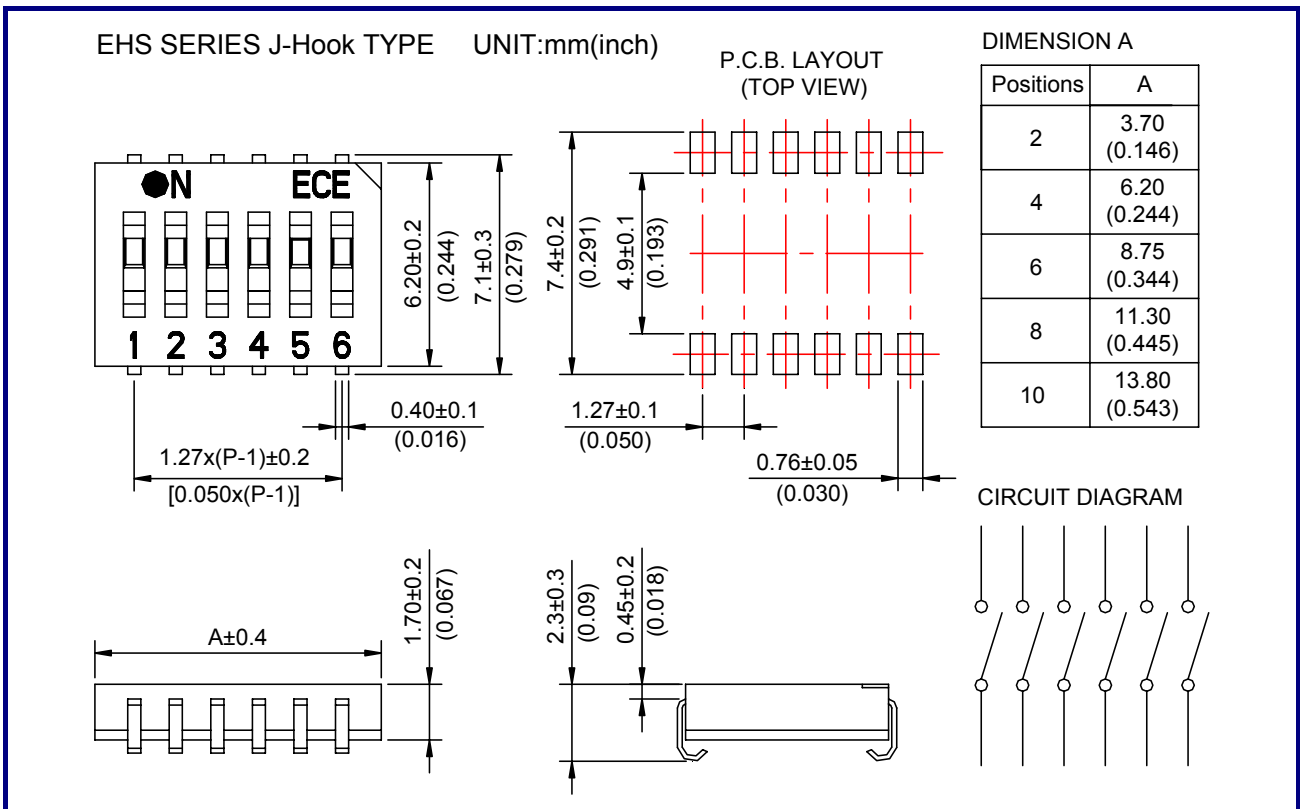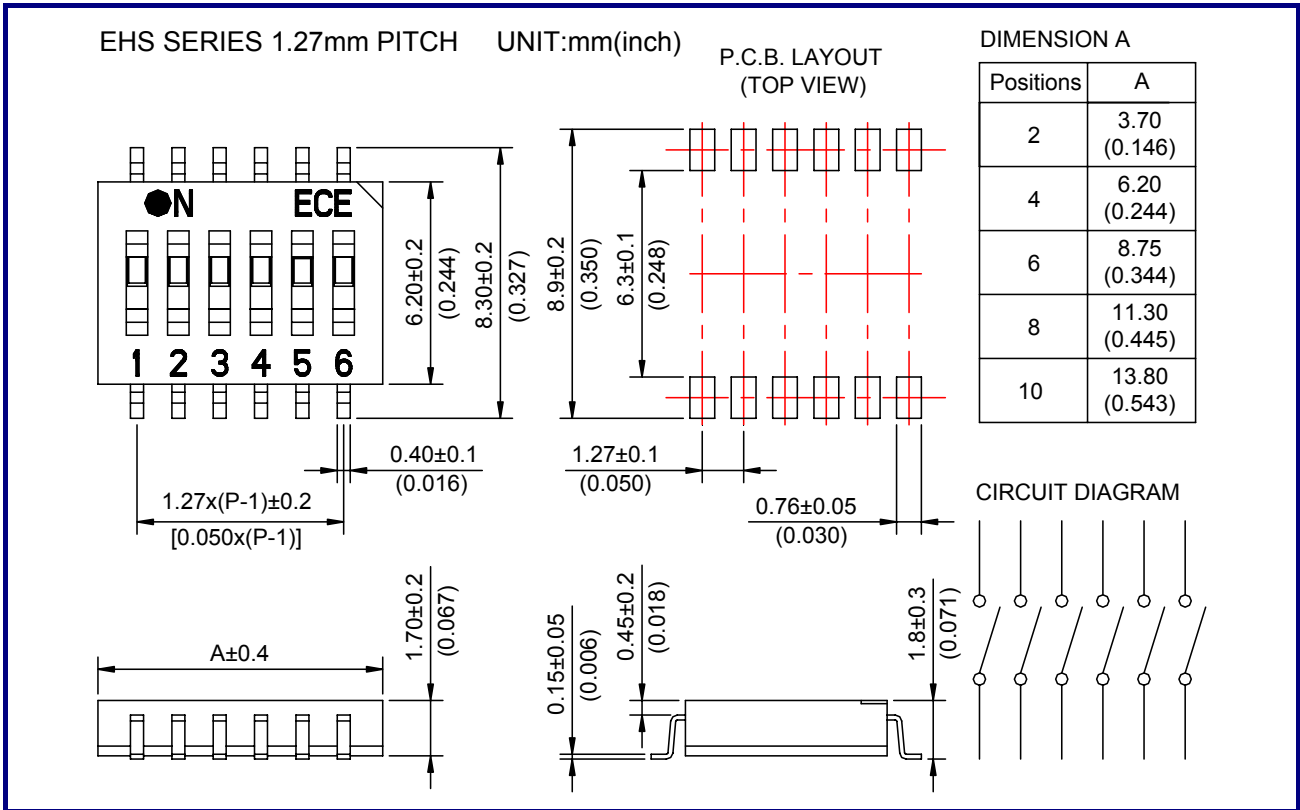

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIP Switches/SIP Switches](#) category:

Click to view products by [ECC manufacturer](#):

Other Similar products are found below :

[09.400BP.04](#) [106-EM04-EV](#) [106-EM08-EV](#) [106-LP04-EV](#) [106-LPD04-EV](#) [106-SDN06-EV](#) [1-1437507-0](#) [1-1437507-6](#) [1-1571983-1](#) [1-1571983-3](#) [1-1571983-4](#) [1-1571983-5](#) [1-1571998-3](#) [1-1571999-1](#) [1-1571999-6](#) [1-161347-2](#) [1-1825002-0](#) [1-1825002-3](#) [1-1825002-4](#) [1-1825002-7](#) [1-1825002-8](#) [1-1825006-1](#) [1-1825006-3](#) [1-1825006-6](#) [1-1825006-7](#) [1-1825006-9](#) [1-1825007-0](#) [1-1825007-3](#) [1-1825008-0](#) [1-1825008-2](#) [1-1825013-1](#) [1-1825013-7](#) [1-1825013-9](#) [1-1825057-0](#) [1-1825058-3](#) [1-1825058-6](#) [1-1825058-9](#) [1-1825059-1](#) [1-1825059-2](#) [1-1825059-3](#) [1-1825059-4](#) [1-1825059-7](#) [1-1825059-8](#) [1-1825059-9](#) [1-1825190-0](#) [1-1825286-0](#) [1-382394-5](#) [1-382394-7](#) [1-435802-5](#) [1-435802-](#)