

The ECS-100X clock oscillator is fully compatible with TTL circuitry. The metal package with pin #7 case ground acts as shielding to minimize radiation.

[Request a Sample](#)

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS



- 10 TTL output load
- Low cost
- Wide frequency range
- Industry standard footprint
- Resistance weld package
- PbFree/RoHS Compliant

Parameters	Frequency Range	Conditions	MIN	TYP	MAX	Units
Frequency (F _o)	1.000 ~ 150.000		1.000		150.000	MHz
Operating Temperature Range (T _{OPR})	1.000 ~ 150.000		0		+70	°C
Storage Temperature Range (T _{STG})	1.000 ~ 150.000		-55		+125	°C
Frequency Stability	1.000 ~ 150.000	All Conditions*	-100		+100	PPM
Input Current (I _{DD})	1.000 ~ 7.999	Max. load			15	mA
	8.000 ~ 23.999	Max. load			30	mA
	24.000 ~ 69.999	Max. load			70	mA
	70.000 ~ 150.000	Max. load			80	mA
Output Symmetry	1.000 ~ 7.999	1.4V level	45	50 ± 3	55	%
	8.000 ~ 150.000	1.4V level	40	50 ± 3	60	%
Rise Time (T _R)	1.000 ~ 24.999	0.4V ~ 2.4V			10	nS
	25.000 ~ 69.999	0.5V ~ 2.4V			5	nS
	70.000 ~ 150.000	0.5V ~ 2.4V			4	nS
Fall Time (T _F)	1.000 ~ 24.999	2.4V ~ 0.4V			10	nS
	25.000 ~ 69.999	2.4V ~ 0.5V			5	nS
	70.000 ~ 150.000	2.4V ~ 0.5V			4	nS
Output Voltage	(V _{OL}) 1.000 ~ 24.999	IOL = 20 mA			0.4	V
	(V _{OL}) 25.000 ~ 69.999	IOL = 20 mA			0.5	V
	(V _{OH}) 70.000 ~ 150.000	IOH = 1 mA	2.4			V
Output Current	(I _{OL}) 1.000 ~ 150.000	VOL = 0.5V			20	mA
	(I _{OH}) 1.000 ~ 150.000	VOH = 2.4V			1.0	mA
Output Load	1.000 ~ 150.000				10	TTL
Start-Up Time (T _s)	1.000 ~ 3.499				20	mS
	3.500 ~ 3.999				35	mS
	4.000 ~ 5.999				30	mS
	6.000 ~ 19.999				20	mS
	20.000 ~ 150.000				15	mS
Supply Voltage	1.000 ~ 150.000		+4.75	+5.0	+5.25	VDC

* Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, aging, shock and vibration.

Part Numbering Guide: Example ECS-100AX-100

ECS	-	Series	-	Stability	-	Frequency Abbreviations
ECS		100 +5V TTL Full Size		AX = ±100 PPM BX = ±50 PPM CX = ±25 PPM		100 = 10.000 MHz

Package Dimensions (mm)

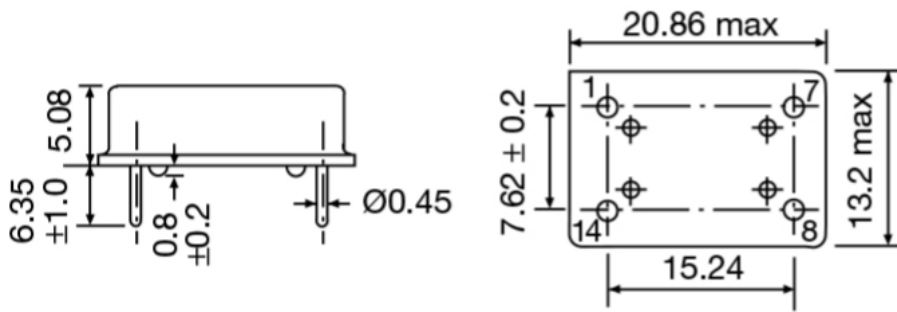


Figure 1) Side and Bottom views

Pin Connections	
#1	NC
#7	Case GND
#8	Output
#14	+5 V DC

Figure 3) Pin Connections

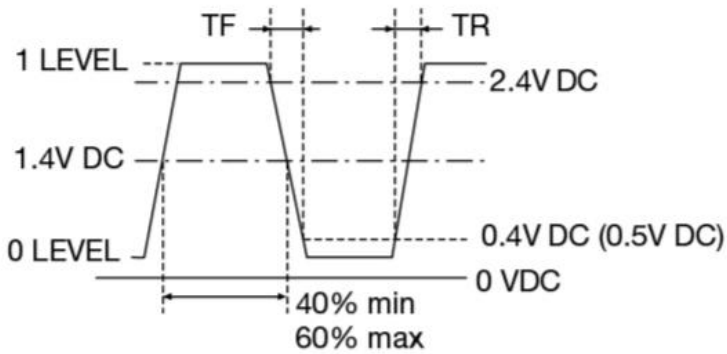


Figure 2) Output Wave Form

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [ECS Inc](#) manufacturer:

Other Similar products are found below :

[EP1400SJTSC-125.000M](#) [601137](#) [601252](#) [CSX750FBC-24.000M-UT](#) [CSX750FBC-33.333M-UT](#) [CSX750FCC-3.6864M-UT](#) [F335-12](#) [F335-25](#) [DSC506-03FM2](#) [ASA-20.000MHZ-L-T](#) [ASA-25.000MHZ-L-T](#) [ASA-27.000MHZ-L-T](#) [ASV-20.000MHZ-LR-T](#) [ECS-2018-160-BN-TR](#) [EL13C7-H2F-125.00M](#) [MXO45HS-2C-66.6666MHZ](#) [SiT1602BI-22-33E-50.000000E](#) [SIT8003AC-11-33S-2.04800X](#) [SiT8256AC-23-33E-156.250000X](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [SMA4306-TL-H](#) [F335-24](#) [F335-40](#) [F335-50](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX750FBC-20.000M-UT](#) [CSX-750FBC33333000T](#) [CSX750FBC-4.000M-UT](#) [CSX750FBC-7.3728M-UT](#) [CSX750FBC-8.000M-UT](#) [CSX-750FCC14745600T](#) [CSX750FCC-16.000M-UT](#) [CSX-750FCC40000000T](#) [CSX750FCC-4.000M-UT](#) [ASA-22.000MHZ-L-T](#) [ASA2-26.000MHZ-L-T](#) [ASA-40.000MHZ-L-T](#) [ASA-48.000MHZ-L-T](#) [ASA-60.000MHZ-L-T](#) [ASF1-3.686MHZ-N-K-S](#) [XO37CTECNA10M](#) [XO57CRECNA16M](#) [XO57CTECNA3M6864](#) [XO57CTECNA4M9152](#)