

The ECS-100X clock oscillator is fully compatible with TTL circuitry. The metal package with pin #7 case ground acts as shielding to minimize radiation.

Request a Sample

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

ECS-100X



- 10 TTL output load
- Low cost
- Wide frequency range
- Industry standard footprint
- Resistance weld package
- PbFree/RoHS Compliant

Parameters	Frequency Range	Conditions	MIN	TYP	MAX	Units
Frequency (F _o)	1.000 ~ 150.000		1.000		150.000	MHz
Operating Temperature Range (T _{OPR})	1.000 ~ 150.000		0		+70	°C
Storage Temperature Range (T _{STG})	1.000 ~ 150.000		-55		+125	°C
Frequency Stability	1.000 ~ 150.000	All Conditions*	-100		+100	PPM
Input Current (I _{DD})	1.000 ~ 7.999	Max. load			15	mA
	8.000 ~ 23.999	Max. load			30	mA
	24.000 ~ 69.999	Max. load			70	mA
	70.000 ~ 150.000	Max. load			80	mA
Output Symmetry	1.000 ~ 7.999	1.4V level	45	50 ± 3	55	%
	8.000 ~ 150.000	1.4V level	40	50 ± 3	60	%
Rise Time (T _R)	1.000 ~ 24.999	0.4V ~ 2.4V			10	nS
	25.000 ~ 69.999	0.5V ~ 2.4V			5	nS
	70.000 ~ 150.000	0.5V ~ 2.4V			4	nS
Fall Time (T _F)	1.000 ~ 24.999	2.4V ~ 0.4V			10	nS
	25.000 ~ 69.999	2.4V ~ 0.5V			5	nS
	70.000 ~ 150.000	2.4V ~ 0.5V			4	nS
Output Voltage	(V _{OL}) 1.000 ~ 24.999	IOL = 20 mA			0.4	V
	(V _{OL}) 25.000 ~ 69.999	IOL = 20 mA			0.5	V
	(V _{OH}) 70.000 ~ 150.000	IOH = 1 mA	2.4			V
Output Current	(I _{OL}) 1.000 ~ 150.000	VOL = 0.5V			20	mA
	(I _{OH}) 1.000 ~ 150.000	VOH = 2.4V			1.0	mA
Output Load	1.000 ~ 150.000				10	TTL
Start-Up Time (T _s)	1.000 ~ 3.499				20	mS
	3.500 ~ 3.999				35	mS
	4.000 ~ 5.999				30	mS
	6.000 ~ 19.999				20	mS
	20.000 ~ 150.000				15	mS
Supply Voltage	1.000 ~ 150.000		+4.75	+5.0	+5.25	VDC

* Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, aging, shock and vibration.

Part Numbering Guide: Example ECS-100AX-100

ECS - Series - Stability - Frequency Abbreviations

ECS

100
+5V TTL
Full Size

AX = ±100 PPM
BX = ±50 PPM
CX = ±25 PPM

100 = 10.000 MHz

Package Dimensions (mm)

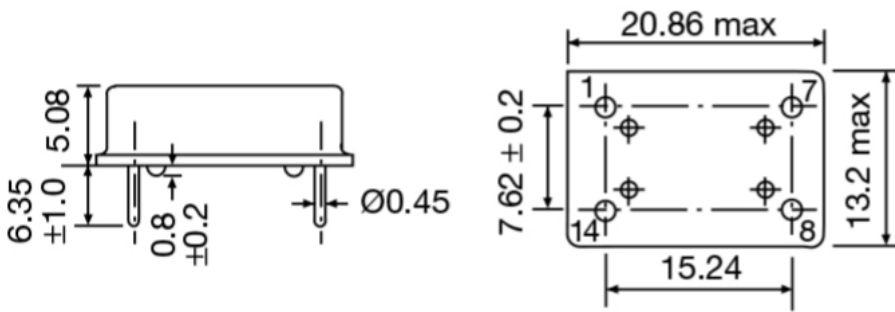


Figure 1) Side and Bottom views

Pin Connections	
#1	NC
#7	Case GND
#8	Output
#14	+5 V DC

Figure 3) Pin Connections

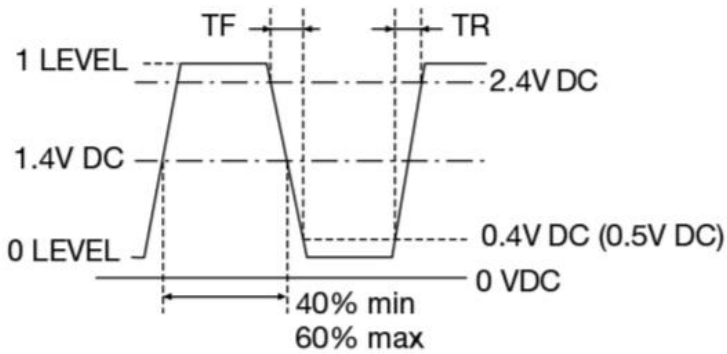


Figure 2) Output Wave Form

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [ECS Inc](#) manufacturer:

Other Similar products are found below :

[601252](#) [F335-25](#) [F535L-33.333](#) [F535L-50](#) [NBXHBA019LN1TAG](#) [SiT1602BI-22-33E-50.000000E](#) [SIT8918AA-11-33S-50.000000G](#)
[SM4420TEV-40.0M-T1K](#) [F335-24](#) [F335-40](#) [F535L-10](#) [F535L-12](#) [F535L-24](#) [F535L-27](#) [PE7744DW-100.0M](#) [ASF1-3.686MHZ-N-K-S](#) [ASV-](#)
[4.000MHZ-LCS-T](#) [XLH735025.000JU4I8](#) [XLP725125.000JU6I8](#) [XO57CTECNA3M6864](#) [601251](#) [SiT8503AI-18-33E-0.200000X](#)
[SIT8918AA-11-33S-16.000000G](#) [SIT9122AI2C233E300.000000X](#) [9120AC-2D2-33E212.500000](#) [9102AI-243N25E100.000000](#) [8208AC-82-](#)
[18E-25.000000](#) [8008AI-72-XXE-24.545454E](#) [8004AC-13-33E-133.330000X](#) [AS-4.9152-16-SMD-TR](#) [ASFL1-48.000MHZ-LC-T](#)
[632L3I004M000000](#) [SIT8920AM-31-33E-25.000000](#) [DSC1028DI2-019.2000](#) [9121AC-2C3-25E100.000000](#) [9102AI-233N33E100.000000X](#)
[9102AI-233N25E200.000000](#) [9102AI-232H25S125.000000](#) [9102AI-133N25E200.000000](#) [9102AC-283N25E200.000000](#) [9001AC-33-33E1-30.000](#)
[8103AC-13-33E-12.000000X](#) [3921AI-2CF-33NZ125.000000](#) [5730-1SF](#) [XUN736000.032768I](#) [ASV-25.000MHZ-ECS-50-T](#) [EC3925ETTTS-](#)
[100.000M TR](#) [SIT1602BC-83-33E-10.000000Y](#) [8003AI-12-33S-40.000000Y](#) [1602BI-13-33S-19.200000E](#)