


HC-49US-DN Extended Temp Range Crystal

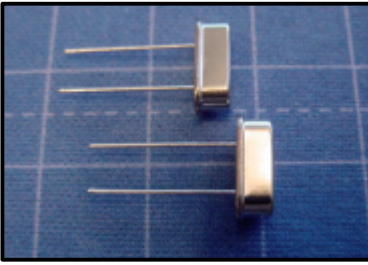

The HC-49US-DN is the extended temp range version of our standard HC-49US crystal. The DN version has an operating temperature of -40 to +85°C and a frequency stability of ± 100 ppm. The HC-49US-DN is a low cost option for today's industrial applications.

FEATURES

- Cost effective
- Resistance-weld sealing
- Extended Temp range

PART NUMBERING GUIDE "EXAMPLE"

ECS	-	FREQUENCY (4.000 MHz)	-	LOAD CAPACITANCE*	-	PACKAGE TYPE **	-	Suffix
ECS	-	40	-	20	-	4	-	DN

* Load Capacitance (xx=xx pF, S=series resonance) ** Package Type examples (-4=3.5 mm max. height, -4L = 2.5 mm max. height)
 DN Suffix, D= ± 100 ppm frequency stability, N = -40 to +85°C temp range

OPERATING CONDITIONS/ELECTRICAL CHARACTERISTICS

PARAMETERS	CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
FREQUENCY RANGE		3.579545		70.000	MHz
CALIBRATION TOLERANCE	@ +25°C			± 30	PPM
FREQUENCY STABILITY, ref @25°C	-40 ~ +85°C			± 100	PPM
SHUNT CAPACITANCE				7	pF
LOAD CAPACITANCE	C _L (Customer Specified)	10	20.0 std	Series	pF
DRIVE LEVEL	DL			500	μ W
OPERATING TEMPERATURE	T _{OPR}	-40		+85	°C
STORAGE TEMPERATURE	T _{STG}	-40		+105	°C
AGING CHARACTERISTICS (Per Year)	@ +25°C ± 3 °C per year			± 5	PPM

EQUIVALENT SERIES RESISTANCE / MODE OF OSCILLATION

FREQUENCY RANGE (MHz)	MODE OF OSC.	MAX. ESR (W)	FREQUENCY RANGE (MHz)	MODE OF OSC.	MAX. ESR (W)
3.579545 - 3.999	Fundamental	200	9.000 - 12.999	Fundamental	60
4.000 - 4.999	Fundamental	150	13.000 - 19.999	Fundamental	40
5.000 - 5.999	Fundamental	100	20.000 - 30.000	Fundamental	30
6.000 - 6.999	Fundamental	80	27.000 - 70.000	3rd O/T	100
7.000 - 8.999	Fundamental	80			

PACKAGE DIMENSIONS (mm)

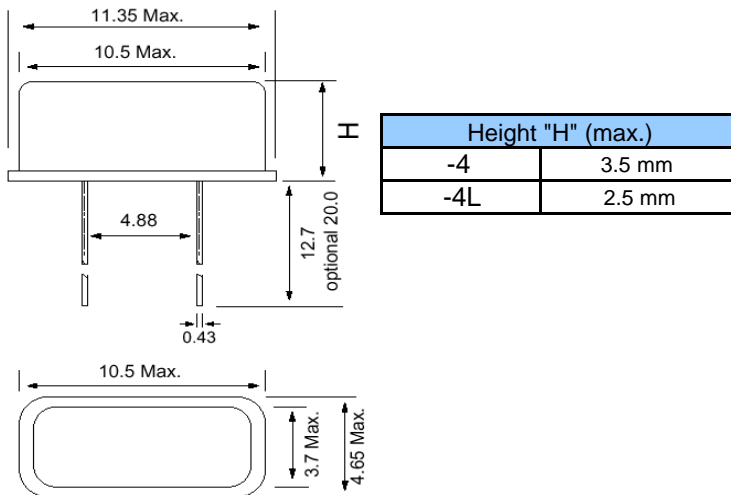


Figure 1) HC-49US-DN - Top and Side Views

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [ECS Inc](#) manufacturer:

Other Similar products are found below :

[MC405 32.0000K-R3:PURE SN](#) [7B-27.000MBBK-T](#) [MP1-8.0 99-BU](#) [9B-15.360MBBK-B](#) [PTX-A2JM-10.000M](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [ABLS-18.432MHZ-20-D-4-T](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [C711980XFAS30XX](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#) [MP-1-25.000MHZ-3L](#) [MP-1-6.000MHZ](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7B-30.000MBBK-T](#) [9B-14.31818MBBK-B](#) [6504-202-1501](#) [6526-202-1501](#) [FA-118T](#) [27.1200MB50P-K0](#) [BTJ120E02C](#) [SG636PCE-20.000MC](#) [3404](#) [CX3225SB48000Z0DZNC1](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [FL5000014](#) [EUCA18-3.1872M](#) [425F35E027M0000](#) [FP0800018](#) [17196](#) [MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au](#) [VXM7-1C1-16M000](#) [MS1V-T1K-32.768kHz-10pF-20PPM-TA-QC-Au](#) [MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au](#) [CX2016DB48000C0FPLC1](#)