

ECS-2532HS-2 (2.8V) and ECS-2532HS-3 (3.3V) subminiature High Stability SMD oscillators. Ideal for today's tight tolerance applications.

[Request a Sample](#)

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

ECS-2532HS



- High Stability Oscillator
- 2.5 x 3.2 mm Footprint
- Low Current Consumption
- RoHS Compliant

| Parameters | Conditions | ECS-2532HS-2 (+2.8V) | | | ECS-2532HS-3 (+3.3V) | | | Units |
|------------------------------|-------------------------|----------------------|------|---------|----------------------|------|---------|-------|
| | | MIN | TYP | MAX | MIN | TYP | MAX | |
| Frequency Range | | 1.000 | | 55.000 | 1.000 | | 55.000 | MHz |
| Operating Temperature | Standard | -40 | | +85 | -40 | | +85 | °C |
| Supply Voltage | VDD | +2.66 | +2.8 | +2.94 | +3.135 | +3.3 | +3.465 | VDC |
| Frequency Stability | Option E | | | ±20 | | | ±20 | PPM |
| | Option F | | | ±15 | | | ±15 | PPM |
| | Option G | | | ±10 | | | ±10 | PPM |
| Input Current | Pin 1 Open or ViH | | | 10 | | | 10 | mA |
| Stand-by Current | Pin 1 = VIL | | | 10 | | | 10 | µA |
| Output Symmetry | @50% VDD Level | | | 45/55 | | | 45/55 | % |
| Rise and Fall Times | 10% VDD to 90% Level | | | 5 | | | 5 | ns |
| "0" Level | VOL | | | 10% VDD | | | 10% VDD | VDC |
| "1" Level | VOH | 90% VDD | | | 90% VDD | | | VDC |
| Output Load | CMOS | | | 15 | | | 15 | pF |
| Disable Delay Time | | | | 100 | | | 100 | ns |
| Startup Time | | | | 10 | | | 10 | ms |
| Aging | @ +25°C ±3°C first year | | | 2 | | | 2 | PPM |

Part Numbering Guide: Example ECS-2532HS-200-3-G-TR

| ECS | Series | Frequency Abbreviations | Voltage | Stability | Packaging |
|-----|--------|-------------------------|--------------------------------|--|------------------------------|
| ECS | 2532HS | 200 = 20 MHz | 2 = +2.8V ±5% 3 = +3.3V ±5% | E = +/- 20 PPM F = +/- 15 PPM G = +/- 10 PPM | TR = Tape & Reel 500/Reel |

Package Dimensions (mm)

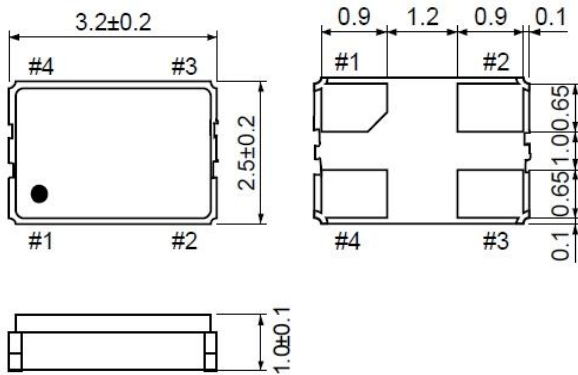


Figure 1) Top, Side, and Bottom views

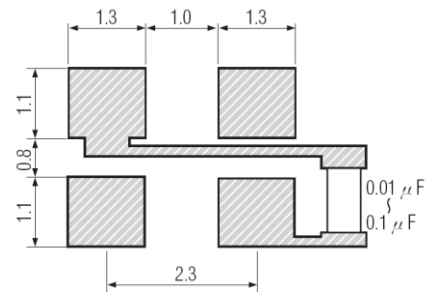


Figure 2) Land Pattern

| Pin Connections | |
|-----------------|-----------|
| #1 | Tri-State |
| #2 | Ground |
| #3 | Output |
| #4 | VDD |

| Tri-State Control Voltage | |
|---------------------------|----------------|
| Pad 1 | Pad 3 |
| Open | Output |
| VDD-0.5V Min | Output |
| 0.5V Max. (Note 1) | High Impedance |

Note: Internal crystal oscillation to be halted (Pin #1=VIL)

Frequency Abbreviations

| FREQUENCY MHz | CODE |
|---------------|------|
| 20.000 | 200 |
| 22.1184 | 221 |
| 24.000 | 240 |
| 26.000 | 260 |
| 27.000 | 270 |
| 32.000 | 320 |
| 40.000 | 400 |
| 44.000 | 440 |
| 50.000 | 500 |
| 54.000 | 540 |


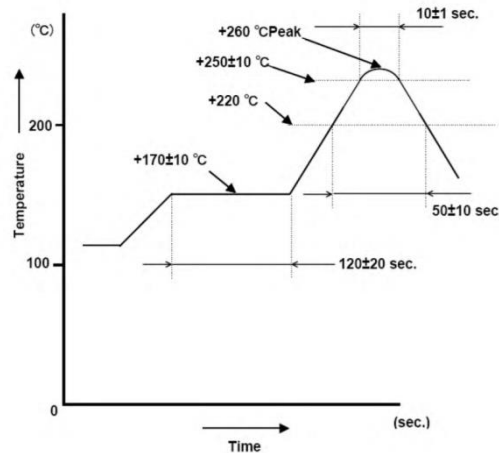


Figure 3) Suggested Reflow Profile

TAPE DIMENSIONS (mm)

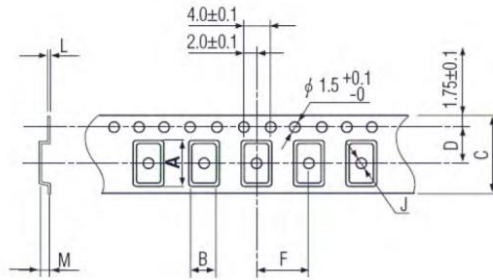

| A | B | C | D | F | J | L | M | Reel Dia. | Qty/Reel |
|-----|-----|-----|-----|-----|-----|------|-----|-----------|----------|
| 3.5 | 2.8 | 8.0 | 3.5 | 4.0 | 1.1 | 0.25 | 1.0 | 180 | 500 |

| Package Data | |
|--------------|-------------------------------|
| Item | Description |
| Lid | Metal |
| Base | Ceramic |
| Sealing | AuSn |
| Terminal | Tungsten (metalized) |
| Plating | Gold/Nickel (Surface)/(Under) |
| RoHS | Compliant (Pb Free) |

Figure 4) Pocket Tape Dimensions

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [ECS Inc](#) manufacturer:

Other Similar products are found below :

[601252](#) [F335-12](#) [F335-25](#) [F535L-33.333](#) [F535L-50](#) [ASV-20.000MHZ-LR-T](#) [ECS-2018-160-BN-TR](#) [EL13C7-H2F-125.00M](#) [MXO45HS-2C-66.6666MHZ](#) [SiT8209AI-32-33E-125.000000](#) [SM4420TEV-40.0M-T1K](#) [F335-24](#) [F335-40](#) [F535L-10](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX-750FCC14745600T](#) [ASF1-3.686MHZ-N-K-S](#) [XO57CTECNA3M6864](#) [ECS-2100A-147.4](#) [601251](#) [EP16E7E2H26.000MTR](#) [SIT8918AA-11-33S-16.000000G](#) [XO3003](#) [9120AC-2D2-33E212.500000](#) [9102AI-243N25E100.00000](#) [8208AC-82-18E-25.00000](#) [ASDK2-32.768KHZ-LR-T3](#) [8008AI-72-XXE-24.545454E](#) [8004AC-13-33E-133.33000X](#) [AS-4.9152-16-SMD-TR](#) [ASFL1-48.000MHZ-LC-T](#) [SIT8920AM-31-33E-25.0000](#) [DSC1028DI2-019.2000](#) [9121AC-2C3-25E100.00000](#) [9102AI-233N33E100.00000X](#) [9102AI-233N25E200.00000](#) [9102AI-232H25S125.00000](#) [9102AI-133N25E200.00000](#) [9102AC-283N25E200.00000](#) [9001AC-33-33E1-30.000](#) [3921AI-2CF-33NZ125.000000](#) [5730-1SF](#) [PXA000010](#) [SIT1602BC-83-33E-10.000000Y](#) [8003AI-12-33S-40.00000Y](#) [1602BI-13-33S-19.200000E](#)