

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

PACKAGE DIMENSIONS (mm)

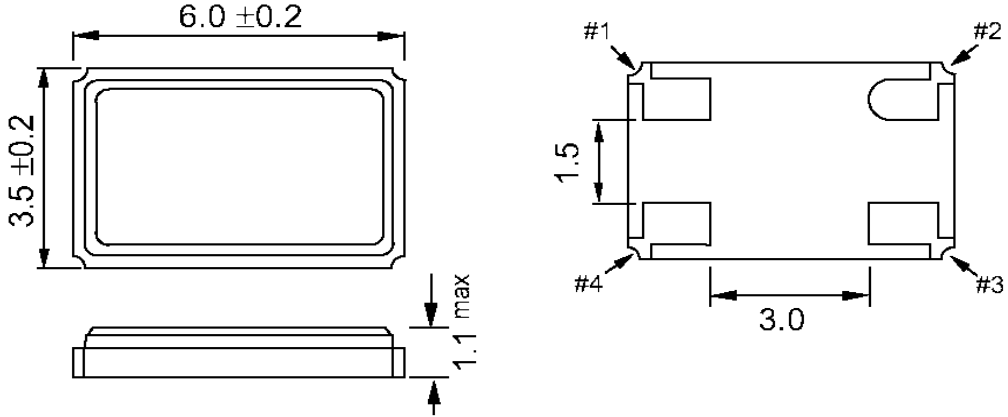


Figure 1) Top, Side and Bottom View

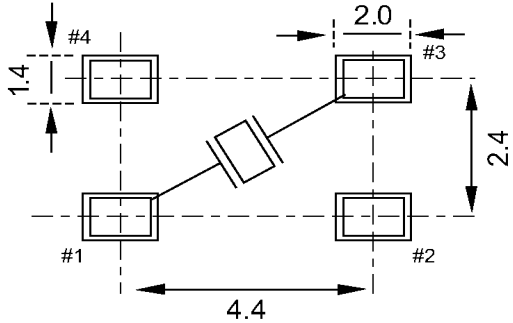


Figure 2) Land Pattern

ELECTRICAL SPECIFICATIONS

Frequency: 12.000000 MHz
 * Frequency Stability: ± 20 ppm Max.
 Crystal Cut: AT Strip
 Load Capacitance (CL): 9 pF
 Recommended Drive Level: 100 µW Max.
 Effective Series Resistance: 40 Ω Max.
 Shunt Capacitance: 3 pF Max.
 Mode of Operation: Fundamental
 Storage Temperature: -40 to +85°C
 Operating Temperature: -20 to +70°C
 Package Type: ECX-64

ECS Part Number: ECS-120-CD-0330

* Inclusive of Frequency tolerance @ +25°C, Frequency stability over the operating temperature of -20 to +70°C, and aging for 3 years.

ECS INC. INTERNATIONAL 1105 S. Ridgeview Olathe, KS 66062 (913) 782-7787		
TITLE 12.0 MHz Crystal, SMD, Tight Tolerance		
SIZE A	DWG NO. ECS-120-CD-0330	REV
CAGE CODE: 1G8B7		SHEET 1 OF 1

SIGNATURES	DATE
DRN BL	1/10/2002
CHK DK	1/10/2002
APP BS	1/10/2002
Dimensions in mm	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [ECS Inc](#) manufacturer:

Other Similar products are found below :

[MC405 32.0000K-R3:PURE SN](#) [7B-27.000MBBK-T](#) [MP1-8.0 99-BU](#) [9B-15.360MBBK-B](#) [PTX-A2JM-10.000M](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [ABLS-18.432MHZ-20-D-4-T](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#) [MP-1-25.000MHZ-3L](#) [MP-1-6.000MHZ](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7B-30.000MBBK-T](#) [9B-14.31818MBBK-B](#) [6504-202-1501](#) [6526-202-1501](#) [FA-118T 27.1200MB50P-K0](#) [BTJ120E02C](#) [SG636PCE-20.000MC](#) [3404](#) [CX3225SB48000Z0DZNC1](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [FL5000014](#) [EUCA18-3.1872M](#) [425F35E027M0000](#) [FP0800018](#) [17196](#) [MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au](#) [VXM7-1C1-16M000](#) [MS1V-T1K-32.768kHz-10pF-20PPM-TA-QC-Au](#) [MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au](#) [CX2016DB48000C0FPLC1](#) [ECS-80-18-30-JGN-TR](#)