

The ECS-327SMO oscillators utilizes the 32.768 KHz tuning fork crystal in a SMD ceramic package. It is designed specifically for wireless PCMCIA and portable communication equipment applications.

[Request a Sample](#)

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS



- 2.0 mm Low Profile
- SMD Version
- Multi Volt (1.5 to 6V)
- RoHS Compliant

Parameters	Conditions	MIN	TYP	MAX	Units
Output Frequency			32.768		KHz
Frequency Stability	-10 ~ +60°C	-60		+30	PPM
	-40 ~ +85°C	-140		+30	PPM
Operating Temperature		-40		+85	°C
Storage Temperature		-50		+125	°C
Input Voltage Vcc		+1.5	+3.3	+6.0	V DC
Input Current	With 15 pF load		8	15	µA
Symmetry	@ ½ Vcc level and +25°C	45/55		55/45	%
Rise and Fall Time				200	ns
"0" Level				Vcc x 0.1	
"1" Level		Vcc x 0.9			
Load	CMOS			15	pF
Disable Delay Time				150	nS
Startup Time	VDD +3.3V at +25°C		220	500	mS

* Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, aging, shock and vibration.

Part Number: ECS-327SMO-TR

ECS	-	Series	-	Packaging
ECS		327SMO		TR = Tape & Reel 2K/Reel

Package Dimensions (mm)

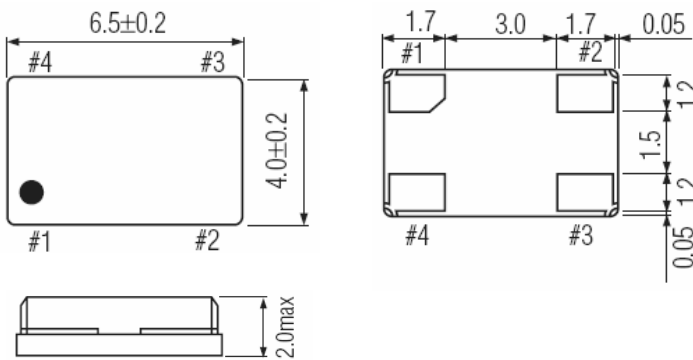


Figure 1) Top, Side, and Bottom views

Pad Connections		
#1	"L"	Open or "H"
#2	Ground	
#3	Z	Output
#4	V _{CC}	

Package Data	
Cover	Metal
Base	Ceramic
Terminal Plating	Gold

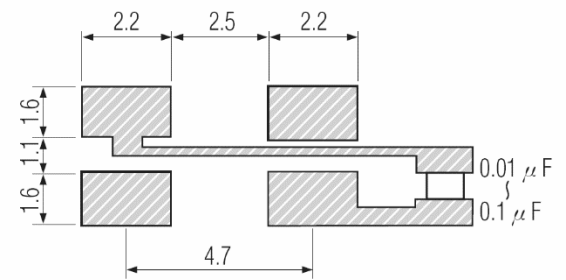


Figure 2) Land Pattern


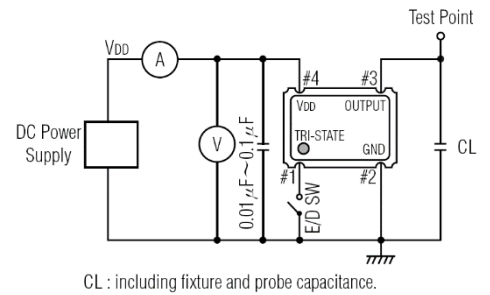


Figure 3) Test Circuit

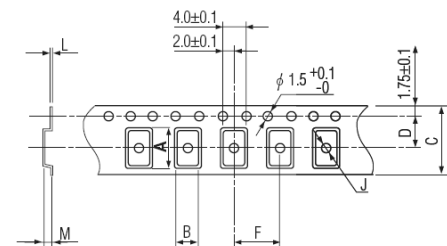

A	B	C	D	F	J	L	M	Reel Dia.	Qty/Reel
7.6	4.6	12.0	5.5	8.0	1.6	0.4	3.1	330	2000 pcs

Figure 4) Tape Specifications

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [ECS Inc](#) manufacturer:

Other Similar products are found below :

[601252](#) [F335-12](#) [F335-25](#) [F535L-33.333](#) [F535L-50](#) [ASV-20.000MHZ-LR-T](#) [ECS-2018-160-BN-TR](#) [EL13C7-H2F-125.00M](#) [MXO45HS-2C-66.6666MHZ](#) [SiT8209AI-32-33E-125.000000](#) [SM4420TEV-40.0M-T1K](#) [F335-24](#) [F335-40](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX-750FCC14745600T](#) [ASF1-3.686MHZ-N-K-S](#) [XO57CTECNA3M6864](#) [ECS-2100A-147.4](#) [601251](#) [EP16E7E2H26.000MTR](#) [SIT8918AA-11-33S-16.000000G](#) [XO3003](#) [9120AC-2D2-33E212.500000](#) [9102AI-243N25E100.00000](#) [8208AC-82-18E-25.00000](#) [ASDK2-32.768KHZ-LR-T3](#) [8008AI-72-XXE-24.545454E](#) [8004AC-13-33E-133.33000X](#) [AS-4.9152-16-SMD-TR](#) [ASFL1-48.000MHZ-LC-T](#) [SIT8920AM-31-33E-25.0000](#) [DSC1028DI2-019.2000](#) [9121AC-2C3-25E100.00000](#) [9102AI-233N33E100.00000X](#) [9102AI-233N25E200.00000](#) [9102AI-232H25S125.00000](#) [9102AI-133N25E200.00000](#) [9102AC-283N25E200.00000](#) [9001AC-33-33E1-30.000](#) [3921AI-2CF-33NZ125.000000](#) [5730-1SF](#) [PXA000010](#) [SIT1602BC-83-33E-10.000000Y](#) [8003AI-12-33S-40.00000Y](#)