

The ECS-CR2-A Chip Type SMD ceramic resonator is an excellent low cost frequency control solution when absolute frequency accuracy is not important.

Request a Sample

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS



Part Number *	Frequency Range (MHz)	Frequency Accuracy @25°C (%)	Frequency Stability -20 ~ +80°C (%)	Aging for Ten Years (%)	ESR (Ω) MAX	Insulation Resistance @ 10VDC
ECS-CR2-□□.□□-A	8.00 ~ 13.00	±0.5	±0.3	±0.3	40	100 M Ω Min.
ECS-CR2-□□.□□-A	13.10 ~ 40.00	±0.5	±0.3	±0.3	40	100 M Ω Min.

Complete part number to include frequency

- Chip Type SMD package
- RoHS Compliant (Note 7 Exemption)
- Tape and Reel Packaging

Part Numbering Guide: ECS-CR2-20.00-A-TR

ECS	Series	Frequency	Version	Packaging
ECS	CR2 = 8 ~ 13 MHz CR2 = 13.1 ~ 40 MHz	20.00 = 20.00 MHz	A = 2 Pad Version	TR = Tape & Reel 1K/Reel

Package Dimensions (mm)

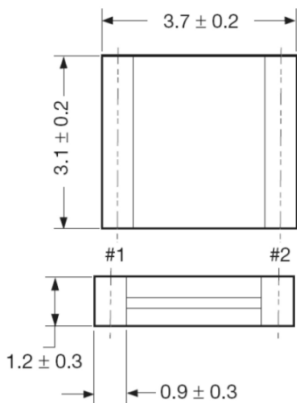


Figure 1) Top and Side Views

Pin Connections	
#1	In/Out
#2	Out/In




Figure 2) Land Pattern

Dimensions (mm)		
T1	T2	W1
3.0 ± 0.2	0.7 ± 0.2	4.1 ± 0.2

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Resonators](#) category:

Click to view products by [ECS Inc](#) manufacturer:

Other Similar products are found below :

[146-32.768-12.5-20-20/A](#) [1C209830BC0C](#) [1C210000BB0C](#) [2520-16.00-9-10-10/A](#) [2520-26.00-12-10-10/A](#) [2520-26.00-9-10-10/A](#) [3225-16.00-10-10-10/A](#) [3225-16.00-12-10-10/A](#) [3225-19.2-12-10-10/A](#) [3225-24.00-10-10-10/A](#) [3225-24.00-12-10-10/A](#) [3225-24.00-20-10-10/A](#) [3225-25.00-10-10-10/A](#) [3225-25.00-12-10-10/A](#) [3225-25.00-20-10-10/A](#) [3225-26.00-12-10-10/A](#) [3225-27.00-20-10-10/A](#) [3225-32.00-12-10-10/A](#) [3225-8.00-10-10-10/A](#) [3225-8.00-20-10-10/A](#) [3225-8.00-8-10-10/A](#) [416626X](#) [416627H](#) [436236G](#) [49MD-13.52127-7-10-10/B](#) [49MD-3.2768-20-10-10/B](#) [49MD-38.000-20-10-10/B](#) [49MD-4.433618-30-10-10/B](#) [49MD-4.825-9-10-10/B](#) [49MD-4.9152-20-10-10/B](#) [49MD-6.000-27-10-10/B](#) [49MD-6.063-12-10-10/B](#) [49MD-8.192-20-10-10/B](#) [49S-12.288-20-10-10/B](#) [49S-13.52127-10-10-10/B](#) [49S-13.52127-7-10-10/B](#) [49S-24.576-20-10-10/B](#) [49S-4.000-8-10-10/B](#) [49S-4.433618-30-10-10/B](#) [49S-4.9152-20-10-10/B](#) [49S-4.9152-30-10-10/B](#) [49S-7.680-18-10-10/B](#) [49S-8.00-20-10-20/A](#) [49S-8.192-20-10-10/B](#) [49S-9.81563-10-10-10/B](#) [49S-9.81563-20-10-10/B](#) [49SAT13560161050JY](#) [49SAT26000201040JY](#) [49SS-13.56-20-10-10/B](#) [49SS-16.00-20-10-10/B](#)