

Features:

- High current, low DCR, high efficiency.
- Very low acoustic noise and very low leakage flux noise.
- Shielded construction reduces EMI
- Low profile, high current power supplies
- Soft saturation.
- AEC-Q200 Grade 1 qualified (-40°C to +125°C ambient)

Applications:

- Motor control
- DC/DC converters in distributed power systems
- DC/DC converter for Field programmable gate Array
- Battery powered device

Parts code:

ECS-HCMPI

Type

0502Q

Dimension

1R2

Inductance code

M

Tolerance: M : ± 20%


D

Date Code


N : ± 30%

PS: Marking: Black.2R2 and 1602(16 YY, 02 WW, follow production date)

Outline Dimension:

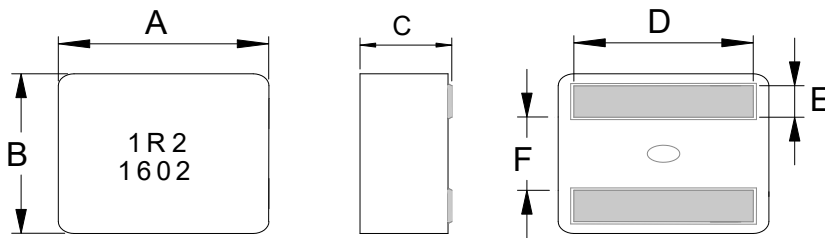



Recommended Land Pattern:



TYPE	A	B	C	D	E	F
ECS-HCMPI-0502Q	5.5±0.2	5.3±0.2	1.9±0.2	4.3±0.3	1.1±0.2	2.3±0.25
ECS-HCMPI-0503Q	5.5±0.2	5.3±0.2	2.9±0.2	4.3±0.3	1.1±0.2	2.3±0.25

Dimensions in mm

a	b	c
4.7 Typ	2.0 Typ	1.25 Typ
4.7 Typ	2.0 Typ	1.25 Typ

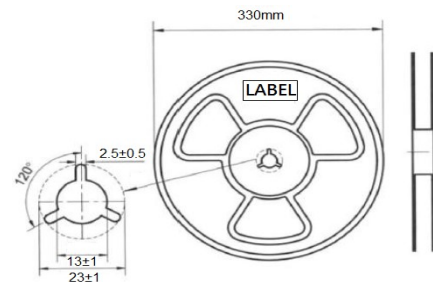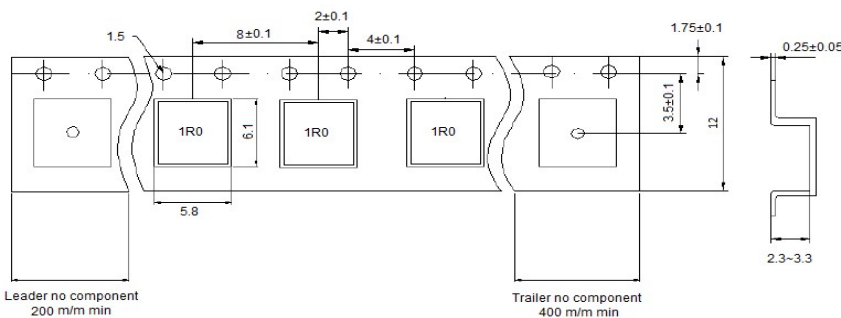

Package: Q'TY / Reel

ECS-HCMPI-0502Q--3K/pcs

ECS-HCMPI-0503Q--2K/pcs



ECS Inc.
International


Phone: 913-782-7787

www.ecsxtal.com

Fax: 913-782-6991

email: sales@ecsxtal.com

Hi-Current Power Inductor ECS-HCMPI-0502Q



5.5x5.3x1.9

■ Specifications

ECS-HCMPI-0502Q						
P/N	L	DCR (mΩ)	Isat (A)		I _{rms} (A)	
	(μH)	Max	Typ.	Max.	20°C Rise	40°C Rise
ECS-HCMPI-0502Q-R15M	0.15	4.6	30.0	27.0	13.9	18.8
ECS-HCMPI-0502Q-R33M	0.33	7.0	26.0	24.0	10.5	14.4
ECS-HCMPI-0502Q-R47M	0.47	8.05	22.0	20.0	10.1	14.1
ECS-HCMPI-0502Q-R56M	0.56	9.54	19.0	16.0	9.9	13.9
ECS-HCMPI-0502Q-R68M	0.68	10.2	16.0	14.0	9.6	13.4
ECS-HCMPI-0502Q-R80M	0.80	11.8	15.5	13.5	9.4	13.0
ECS-HCMPI-0502Q-R82M	0.82	12.7	15.0	13.0	8.5	12.0
ECS-HCMPI-0502Q-1R0M	1.00	13.8	14.5	12.8	7.5	10.5
ECS-HCMPI-0502Q-1R2M	1.20	16.3	14.0	12.2	6.8	9.4
ECS-HCMPI-0502Q-1R5M	1.50	18.7	13.3	11.7	6.4	8.8

■ Notes: Tolerance: M (± 20%) , N (± 30%)

■ Test Frequency: 100 KHz / 0.1V

Isat: Based on Inductance decrease 30%

I_{rms}: Based on Temperature increase 40°C

Operating temperature range: -40°C ~ +125°C

Storage Temp: -40°C ~ +125°C



ECS Inc.
International


Phone: 913-782-7787

www.ecsxtal.com

Fax: 913-782-6991

email: sales@ecsxtal.com

Hi-Current Power Inductor ECS-HCMPI-0503Q



5.5x5.3x2.9

■ Specifications

ECS-HCMPI-0503Q						
P/N	L	DCR (mΩ)	Isat (A)		Irms (A)	
	(uH)	Max	Typ.	Max.	20°C Rise	40°C Rise
ECS-HCMPI-0503Q-R15M	0.15	2.31	36.0	32.5	14.3	22.2
ECS-HCMPI-0503Q-R16M	0.16	2.33	35.0	32.0	14.2	22.2
ECS-HCMPI-0503Q-R33M	0.33	3.52	28.0	26.0	13.8	19.2
ECS-HCMPI-0503Q-R56M	0.56	4.52	22.2	20.2	13.6	17.7
ECS-HCMPI-0503Q-R60M	0.60	4.52	22.0	20.0	13.6	17.7
ECS-HCMPI-0503Q-R80M	0.80	5.65	20.0	18.0	10.1	13.1
ECS-HCMPI-0503Q-R82M	0.82	5.78	19.7	17.6	9.9	12.9
ECS-HCMPI-0503Q-1R0M	1.00	7.60	16.5	14.3	9.0	12.2
ECS-HCMPI-0503Q-1R2M	1.20	9.70	15.0	13.5	8.5	11.0
ECS-HCMPI-0503Q-1R5M	1.50	11.20	14.0	12.5	8.0	10.5
ECS-HCMPI-0503Q-1R8M	1.80	12.70	12.3	11.3	7.6	10.1
ECS-HCMPI-0503Q-2R2M	2.20	14.50	10.0	9.0	7.2	9.7
ECS-HCMPI-0503Q-3R3M	3.30	23.10	9.5	8.7	5.9	8.1
ECS-HCMPI-0503Q-4R7M	4.70	36.30	8.2	7.0	4.3	5.9

■ Notes: Tolerance: M (± 20%), N (± 30%)

■ Test Frequency: 100 KHz / 0.1V

Isat: Based on Inductance decrease 30%

Irms: Based on Temperature increase 40°C

Operating temperature range: -40°C ~ +125°C

Storage Temp: -40°C ~ +125°C




ECS Inc.
International

Phone: 913-782-7787

www.ecsxtal.com















Fax: 913-782-6991

email: sales@ecsxtal.com



5.5x5.3x2.9

PERFORMANCE CURVES

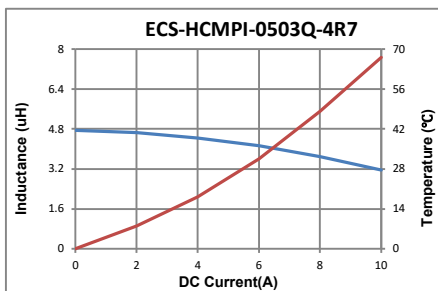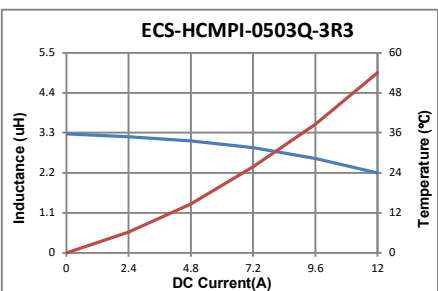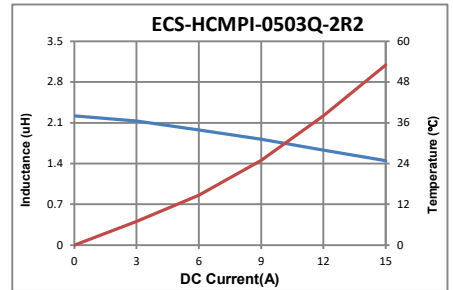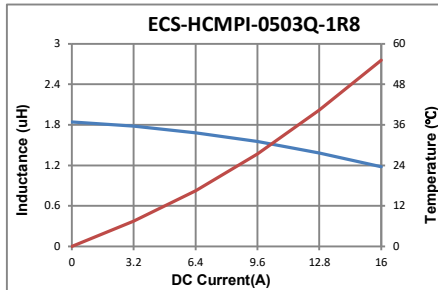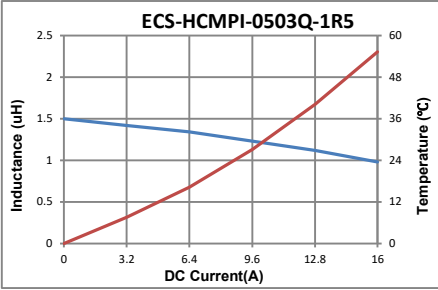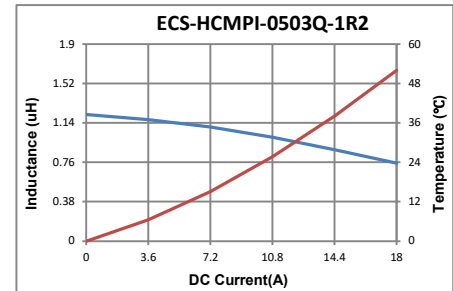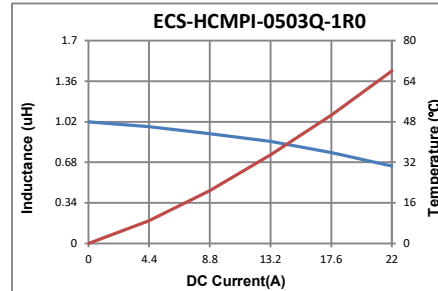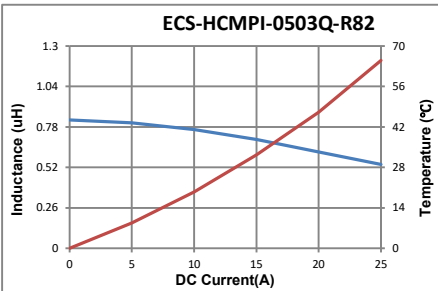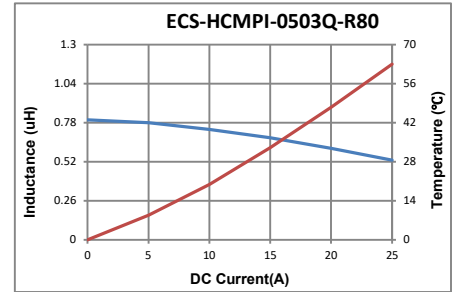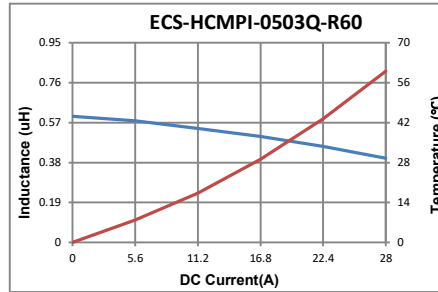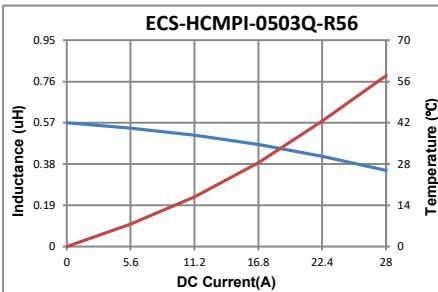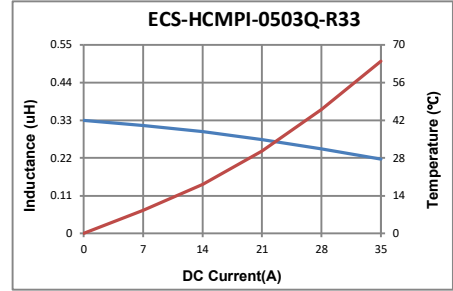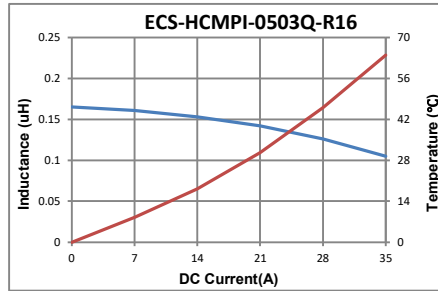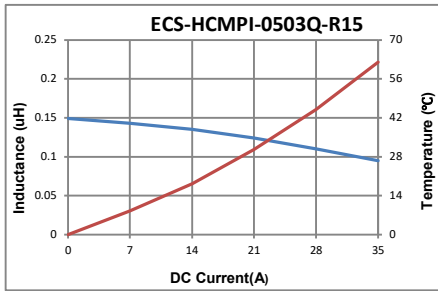

ECS Inc. International

Phone: 913-782-7787

www.ecsxtal.com

Fax: 913-782-6991

email: sales@ecsxtal.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [ECS Inc](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#)
[MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#)
[PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#)
[RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#)
[DH2280-4R7M](#) [DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#)
[1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)