

VC-TXO-39SMX Series

VC-TCXO



The VC-TXO-39SMX is a VC (Voltage Controlled) TCXO (Temperature Compensated Crystal Oscillator) featuring very tight stability over a wide temperature range. The small SMD ceramic package measures 11.4 x 9.6 x 2.3 mm. The voltage control has a tuning range of ± 12 ppm typical. The low profile package is ideal for wireless communications applications.

[Request a Sample](#)

OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS



- Highly stable output
- RoHS Compliant (Pb Free)
- Voltage control function
- Tape and Reel (500 pcs)

Parameters	Conditions	VC-TXO-39SMX (3V)			Units
		MIN	TYP	MAX	
Frequency Range		10.000		19.440	MHz
Operating Temperature		-30		+75	°C
Frequency Stability	Standard			± 2.5	PPM
Option A	-20 ~ +75°C			± 1.5	PPM
Supply Voltage Change	+3V $\pm 5\%$			± 0.3	PPM
Load Change	10k Ω $\pm 10\%$ // 10pF $\pm 10\%$			± 0.3	PPM
Aging	First year @ 25°C			± 1	PPM
Storage Temperature		-40		+85	°C
Supply Voltage	+3.0 V DC Nominal	+2.85	+3.0	+3.15	V DC
Current Consumption	10k Ω $\pm 10\%$ // 10pF $\pm 10\%$			1.5	mA
Output Voltage	Clipped since wave (DC-Cut)	0.8			Vp-p
Output Load	10k Ω $\pm 10\%$ // 10pF $\pm 10\%$				
Frequency Control Range	+1.5V DC ± 1 V Positive Slope	± 9	± 12		PPM
Control Voltage		+0.5	+1.5	+2.5	V

Part Numbering Guide: Example VC-TXO-39SMX-128-A-TR

Series - Frequency Abbreviations - Frequency Stability - Packaging

VC-TXO-39SMX

128 = 12.800 MHz

A = ± 1.5 ppm

TR = Tape & Reel
500 pcs/Reel

Package Dimensions (mm)



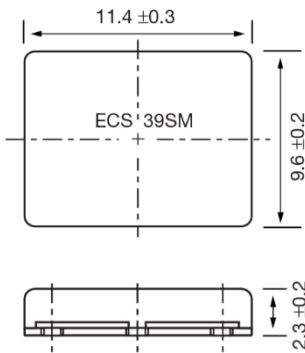


Figure 2) Test Circuit

Figure 1) Top, Side, and Bottom views

Pin Connections	
#1	V Control
#2	Ground
#3	Output
#4	V _{CC}

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [TCXO Oscillators](#) category:

Click to view products by [ECS Inc](#) manufacturer:

Other Similar products are found below :

[SiT5000AI-3D-33E0-10.000000X](#) [FOX923CH-19.20M](#) [TG-5006CG-12H 26.0000M3](#) [THD3031035LK280005-10.0M](#) [SIT5000ACC8E-33VQ-19.200000X](#) [SiT5001AI-2E-33N0-48.000000X](#) [TG3225CEN 25.0000M-KFGNNAB](#) [TG2016SMN 38.4000M-MCGNNM3](#) [TG2016SMN 48.0000M-MCGNNM3](#) [TG2016SMN 19.2000M-ECGNNM3](#) [TG2016SMN 26.0000M-ECGNNM3](#) [SIT1566AC-JV-18E-32.768E](#) [AST3TDATAACJ5-10.0000MHz](#) [AST3TDATAACJ5-20.0000MHz](#) [AST3TDA53TACJ2-19.2000MHz](#) [AST3TDA53TACJ2-38.8800MHz](#) [AST3TDATAACJ5-19.2000MHz](#) [AST3TDATAACJ5-38.8800MHz](#) [SiT5155AI-FK-33E0-10.000000F](#) [NT0503CC3I287EN10](#) [NT0503CH3I287CN25](#) [NT0503CH3I287CN30.72](#) [NT0503CC3I287DN20](#) [TG-3541CE 32.7680KXB0](#) [ECS-TXO-2016MV-320-TR](#) [TG2520SMN 38.4000M-MCGNNM3](#) [ECS-TXO-2016MV-120-TR](#) [CVT32-10.000](#) [KT7050A10000KAW33TAD](#) [LFTCXO063716BULK](#) [7Z-26.000MDG-T](#) [7Z-26.000MBG-T](#) [LFTCXO075797](#) [SIT5356AI-FQ-33E0-25.000000X](#) [SIT5356AI-FQ-33VT-10.000000X](#) [SIT5356AI-FQ-33VT-20.000000X](#) [SIT5357AI-FQ-33N0-100.000000X](#) [DS32KHZSN+T&R](#) [LFPTXO000316Bulk](#) [SiT5000AICGE-33E0-25.000000X](#) [SiT1568AI-JE-DCC-32.768E](#) [SiT1552AC-JE-DCC-32.768D](#) [LFPTXO000068Bulk](#) [LFPTXO000244Bulk](#) [LFPTXO000291Bulk](#) [LFPTXO000268Bulk](#) [ABDFTCXO-20.000MHz-L-2-CT](#) [LFTCXO077226Cutt](#) [LFTCXO077227Cutt](#) [LFTCXO077231Cutt](#)