


### FEATURES:

- Can be used with 0.062" (1.57mm), 0.093" (2.36mm) or 0.125" (3.125mm) board thickness.
- Available in 50 and 64 positions.
- Variety of mounting options available.
- Intermateable with comparable series connectors.
- Applications include data control systems, telecom interconnect and electronic instrumentation
- Mounting Posts Provide Positive Location and Retention
- UL Approved.
- RoHS Compliant

### Specifications:

|                       |   |
|-----------------------|---|
| Insulator Material    | Glass filled thermoplastic UL 94V-0, Color: Blue  |
| Contact Material      | Copper Alloy  |
| Contact Plating       | Gold Plating on contact area and Tin Plating on tails with Nickel underplating all over |
| Shell Material        | Steel - Nickel Plated   |
| Current Rating        | 5 Amps AC/DC Continuous. Is not "hot swappable"   |
| Contact Resistance    | 30 milliohms maximum  |
| Withstand Voltage     | 1200 VAC rms  |
| Insulation Resistance | 1000 Megohms minimum at 500 V DC, operating voltage 250 VAC                             |
| Operating Temperature | -40°C to +105°C   |

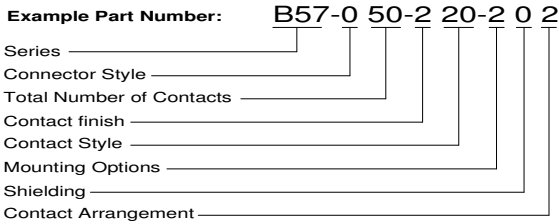

### MOUNTING OPTIONS

- |   |   |
|---|---|
| A | 4-40 standoff on pos. 1 & J-hook on pos. 25 |
| 2 | 4-40 threaded insert / .120 dia. Hole       |
| 3 | 4-40 threaded insert / 4-40 threaded hole   |
| 4 | .120 dia. Hole / .120 dia. Hole             |
| 5 | 4-40 threaded insert / boardlocks           |
| 6 | 4-40 threaded insert / boardlocks / latch   |
| 7 | .120 dia. Insert / 4-40 threaded hole       |
| 8 | 4-40 hex standoff / boardlocks              |

### SERIES

B57

### CONNECTOR STYLE

- |   |            |
|---|------------|
| 0 | Receptacle |
| 1 | Plug       |

### SHIELDING

- |   |             |
|---|-------------|
| 0 | Metal Shell |
|---|-------------|

### TOTAL # OF CONTACTS

50 or 64

### CONTACT ARRANGEMENT

- |   |       |
|---|-------|
| 1 | Latch |
|---|-------|


### CONTACT FINISH

- |   |                                 |
|---|---------------------------------|
| 2 | Gold flash (2µ" min. thickness) |
| 5 | 15µ" Gold                       |
| 6 | 30µ" Gold                       |

### CONTACT STYLE

- |    |                                    |
|----|------------------------------------|
| 20 | Vertical Press fit                 |
| 21 | Vertical PCB                       |
| 29 | Flat Cable termination             |
| 60 | Right Angle PCB (.187 tail length) |
| 61 | Right Angle PCB (.100 tail length) |
| 62 | Right Angle PCB (.125 tail length) |

### EXPLODED HARDWARE ASSEMBLY

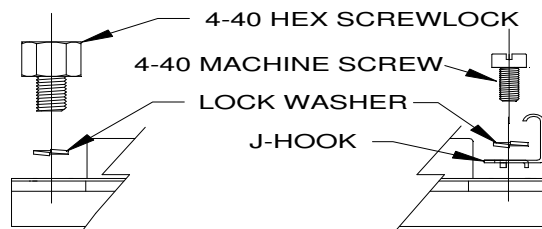

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [I/O Connectors](#) category:*

*Click to view products by [EDAC](#) manufacturer:*

Other Similar products are found below :

[571763P](#) [58098-0628](#) [72.250.1628.2](#) [72.250.2428.2](#) [74720-0505](#) [76.350.0729.0](#) [76871-1403](#) [FCN-244F080-G/1](#) [FCN-260A9920](#) [MP-5T180MUNNA-005](#) [PCR-E36PM](#) [PCS-XE26MA+](#) [G38A71314B](#) [1571250010](#) [157-22500-3](#) [MS3471L14-19P L/C](#) [192991-0703](#) [172501-4002](#) [172501-6002](#) [FCN-260C008-A/L0](#) [FCN-260C024-AL0](#) [FCN-261Z008](#) [2000314-1](#) [200331-1](#) [PCR-E36FC+](#) [PCS-E28FS+](#) [PCS-XE26SLFD+](#) [PCS-XE26SLFDT+](#) [G730VID08BDC24](#) [HDR-E14MSG1+](#) [U90B2054081210](#) [UE86K842720321](#) [38113800006](#)  
[DP3AR020WQ1R200](#) [Z4.102.0680.0](#) [500-1040](#) [500-1052](#) [500-1054](#) [ZP-4008-66L](#) [0709821002](#) [DX40-20P\(55\)](#) [5554841-1](#) [MS3474W18-8P-LC\\*](#) [SM3106F14S-7S-LC](#) [U90B3054061110](#) [U65-E04-4020](#) [ZPF000000000097891](#) [557-262M2-06C](#) [747360449](#) [10099439-003C-TRLF](#)