

1N4728A - 1N4764A Z1110A - Z1300A

V_Z : 3.3 - 300 Volts
P_D : 1 Watt

FEATURES :

- * Complete voltage range 3.3 to 300 Volts
- * High peak reverse power dissipation
- * High reliability
- * Low leakage current
- * Pb / RoHS Free

MECHANICAL DATA

- * Case : DO-41 Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Axial lead solderable per MIL-STD-202, method 208 guaranteed
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 0.335 gram

MAXIMUM RATINGS

Rating at 25 °C ambient temperature unless otherwise specified


Rating	Symbol	Value	Unit
DC Power Dissipation at T _L = 50 °C (Note1)	P _D	1.0	Watt
Maximum Forward Voltage at I _F = 200 mA	V _F	1.2	Volts
Maximum Thermal Resistance Junction to Ambient Air (Note2)	R _{θJA}	170	K / W
Junction Temperature Range	T _J	- 55 to + 175	°C
Storage Temperature Range	T _S	- 55 to + 175	°C

Note :


- (1) T_L = Lead temperature at 3/8" (9.5mm) from body
- (2) Valid provided that leads are kept at ambient temperature at a distance of 10 mm from case.

SILICON ZENER DIODES

DO - 41

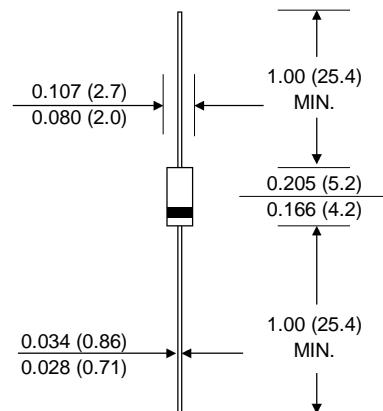

Dimensions in inches and (millimeters)

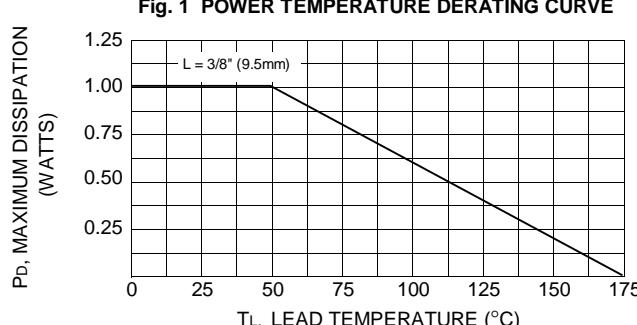

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for EIC Semiconductor manufacturer:

Other Similar products are found below :

[5KP33A](#) [BZW50-47B](#) [GBU8K](#) [SMBJ6.0A](#) [DF08S](#) [BZW04-376B](#) [P6KE68A](#) [SB540](#) [1N5231B](#) [P6SMB400A](#) [1N4732AG](#) [1.5KE6.8CA](#)
[SMCJ40CA](#) [3EZ5.1D5](#) [5KP6.0A](#) [D3SB60](#) [P6KE27A](#) [P6SMB39CA](#) [KBPC3504](#) [P4SMA6.8CA](#) [DF01S](#) [1.5KE62A](#) [1.5KE10A](#) [BZW50-180](#)
[BR1508](#) [1N5339B](#) [1N4744AG](#) [1N4749](#) [SMBJ18A](#) [1N4748A](#) [P6SMB18A](#) [P4KE15A](#) [MB6S](#) [BZW04-15B](#) [MMBT6517](#) [1N4756A](#)
[P6KE6.8CA](#) [SA20CA](#) [1N4751A](#) [P6KE440CA](#) [1N5408G](#) [SS3MS](#) [SMAJ43CA](#) [3EZ12D5](#) [BZX85C8V2](#) [1N4732A](#) [SMAJ150A](#) [3EZ27D5](#)
[20HCC](#) [S3MBF](#)