

1450

ELECTROSWITCH

CO.

SP

IP67 Sealed Toggle Switches

Highest quality for the most demanding applications

3100 Series

Standard 15/32" diameter bushing. Standard Bat length is .560".

Current Rating	Catalog No.		Action	Termination
6A -125VAC, 3A-250VAC	3105C	Fig 1	SPST on-none-off	.250" QC
6A -125VAC, 3A-250VAC	3105D	Fig 2	SPST on-none-off	6" Wire Leads, #16 Gauge
6A -125VAC, 3A-250VAC	3101C	Fig 1	SPDT on-none-on	.250" QC
6A -125VAC, 3A-250VAC	3101D	Fig 2	SPDT on-none-on	6" Wire Leads, #16 Gauge
6A -125VAC, 3A-250VAC	3102C	Fig 1	SPDT on-off-on	.250" QC
6A -125VAC, 3A-250VAC	3102D	Fig 2	SPDT on-off-on	6" Wire Leads, #16 Gauge

3100 Series Toggle

Electrical Rating: 6A - 125 VAC, 3A - 250 VAC


Life Cycles: 25,000 Electrical (Optional 75,000 with silver rocker) 50,000 Mechanical (Optional 100,000 with silver rocker) Operating Temp: -10°C to +65°C


Sealing:

seal tested per IP67 standards to withstand submersion in water to a depth of 1 meter for 30 minutes, Meets IP68 **UL Recognized** File No. E66512, Vol 1, Sec.12

Dielectric Strength 1000 Volts RMS Minimum

Mounting Means 15/32" Bushing, Keyway .078 - .083 Wide X .037 - .043 Deep, Standard Hardware supplied



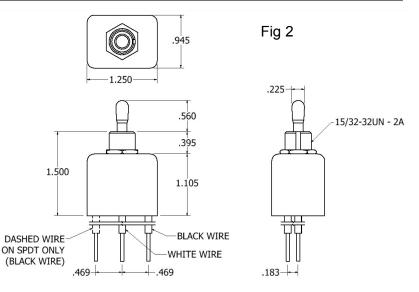

All Information subject to change without notice

Flier EEP-SG-6 RevA ©Copyright Electroswitch 2014

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Toggle Switches category:

Click to view products by Electroswitch manufacturer:

Other Similar products are found below :

8928K478 020017-13 60012L 6006L CS115W CS120W 637H/25 6663 7101SPDV30BE 7103SDV30BE 7105D 7108P3YAV2BE 71YY50282 7300K36 7301K38 7306K36 7310K36 7506K4 7592K6 7660K12 7691K14 7700K1 8396K108 8824K14 8828K13 8835K3 8858K44 PS83-121G 1-1825192-0 A201SCWZB04 A207SYCB04 A208J61ZQ0004 A221T1TCQ A232M1YCQ A323S1CWZQ A423S1CWZG-M8 1201W 12156AX408 12147AGKX679 12246X778 12TW49-3D 130312 13037L 13001X AE101MD1W4B04 AE208SD1W4B04 MS24659-22D MS27407-5 1520230-9 1520231-1