



IP67 Sealed Thumb Switches

Highest quality for the most demanding applications

TS Series









Robust Design Environmentally Sealed Compact Size

Electroswitch
Phone: 888-768-2797
sales@electro-nc.com







Contact Electroswitch


Phone: 888-768-2797 sales@electro-nc.com

IP67 Sealed Thumb Switches

Highest quality for the most demanding applications



Catalog No.	Poles	Action	Actuator	Terminal	Terminal Plating	Actuator Color
TS121SZQ2	1	on-off-on	Standard	Solder	Silver	Black
TS123SZQ2	1	on-none-on	Standard	Solder	Silver	Black
TS126SZQ2	1	on-none-mom	Standard	Solder	Silver	Black
TS127SZQ2	1	mom-off-mom	Standard	Solder	Silver	Black
TS131SZQ2	1	on-off-mom	Standard	Solder	Silver	Black

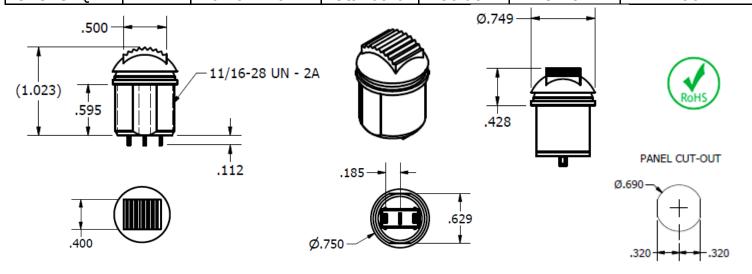

SPECIFICATIONS:

Contact Ratings 6 amp at 125 VAC, 3 amp @ 250 VAC

Life Under Load — 60,000 make-and-break cycles — resistive load only.

Mechanical Life— 100,000+ cycles

Initial Contact Resistance — 10 milliohms maximum 3 VDC, 100 ma.

Insulation Resistance — 1,000 megohms, min.

Dielectric Strength − 1,000 volts rms at sea level.

Operating Temperature — -30 degrees C to 85 degrees C.

All Information subject to change without notice

Flier EEP-TS RevA ©Copyright Electroswitch 2015

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Toggle Switches category:

Click to view products by Electroswitch manufacturer:

Other Similar products are found below:

8928K478 020017-13 60012L 6006L CS115W CS120W 637H/25 6663 7101SPDV30BE 7103SDV30BE 7105D 7108P3YAV2BE
71YY50282 7300K36 7301K38 7306K36 7310K36 7506K4 7592K6 7660K12 7691K14 7700K1 8396K108 8824K14 8828K13 8835K3
8858K44 PS83-121G 1-1825192-0 A201SCWZB04 A207SYCB04 A208J61ZQ0004 A221T1TCQ A232M1YCQ A323S1CWZQ
A423S1CWZG-M8 1201W 12156AX408 12147AGKX679 12246X778 12TW49-3D 130312 13037L 13001X AE101MD1W4B04
AE208SD1W4B04 MS24659-22D MS27407-5 1520230-9 1520231-1