

SHT-13 | Multifunction digital time switch with Wi-Fi connection

ALL IN ONE

- daily
- weekly
- yearly
- astro


WEB SERVER

WI-FI
2.4 GHz




EAN code
SHT-13: 8595188189071
SHT-13/2: 8595188184854

Technical parameters	SHT-13	SHT-13/2
Supply terminals:	A1-A2	
Supply voltage:	AC/DC 24 – 240 V (AC 50-60 Hz)	
Consumption (max.):	Wi-Fi "OFF" 0.5 W/2 VA "ON" 1 W/3 VA	
Supply voltage tolerance:	-15 %; +10 %	
Output		
Contact type:	1x changeover (AgSnO ₂)	2x changeover (AgSnO ₂)
Rated current:	16 A/AC1; 1 HP 240 Vac, 1/2 HP 120 Vac; PD. B300	
Switched power:	4000 VA/AC1, 384 W/DC1	
Inrush current:	30 A/< 3 s	
Switching voltage:	250 V AC/24 V DC	
Power dissipation (max.):	1.2 W	2.4 W
Mechanical life:	30.000.000 ops.	
Electrical life (AC1):	100.000 ops.	
Time circuit		
Accuracy:	max. ±0.5 s/day at 23°C (73.4 °F)	
Min. switching interval:	1 s	
Data retention time:	min. 10 years	
Set time backup:	up to 120 days (CR 2032 - 3V)	
Program circuit		
Number of memory locations:	200	
Program type:	daily, weekly, yearly, astro	
Displayed data:	LCD display with white backlight	
Settings via website:	by Wi-Fi (2.4 GHz)	
Other information		
Operating temperature:	-20 .. +55 °C (-4 .. 131 °F)	
Storage temperature:	-30 .. +70 °C (-22 .. 158 °F)	
Dielectric strength:		
supply – output	AC 4 kV	
output 1 – output 2	AC 4 kV	
Operating position:	any	
Mounting:	DIN rail EN 60715	
Protection degree:	IP40 front panel / IP20 terminals	
Overvoltage category:	III.	
Pollution degree:	2	
Cross-wire section – solid/ stranded with ferrule (mm ²):	max. 1x 2.5, 2x 1.5/ max. 1x 2.5 (AWG 14)	
Dimensions:	90 x 35 x 64 mm (3.5" x 1.4" x 2.5")	
Weight:	122 g (4.3 oz)	135 g (4.8 oz)
Standards:	EN 61812-1	

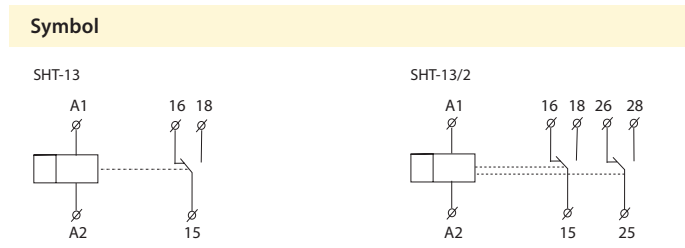


- All programs in one device (daily, weekly, yearly and astronomical).
- UNiversal supply voltage in range of AC/DC 24 – 240 V (AC 50-60 Hz).
- Simple setting after the first start-up.
- User replaceable battery to back up the set time.
- Built-in web server for setup and control via Wi-Fi connection.
- Time synchronization through NTP server (require internet connection).
- New well-arranged display with white backlight.
- ASTROnomic program: manual entry of coordinates or selecting one of the preset cities.
- One/two channel design (each with an operating hours counter).
- Pulse/cycle output mode.
- Transition of summer/winter time – AUTO or OFF.
- Sealable transparent front panel cover.
- PIN code protection against unauthorized changes.
- Wireless firmware update.


Description

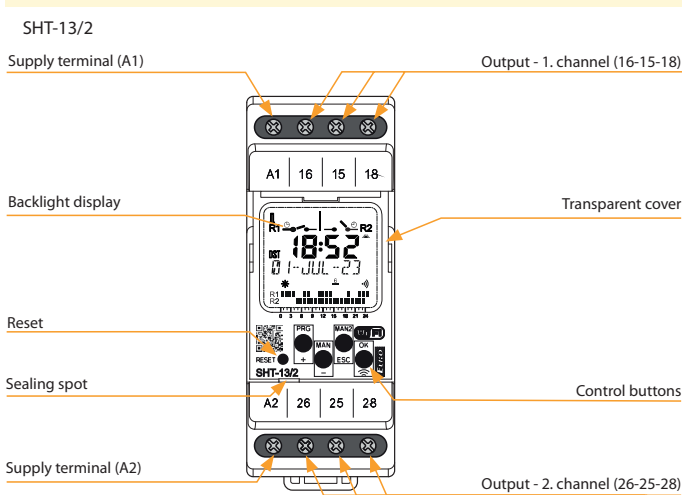

Description of displayed elements

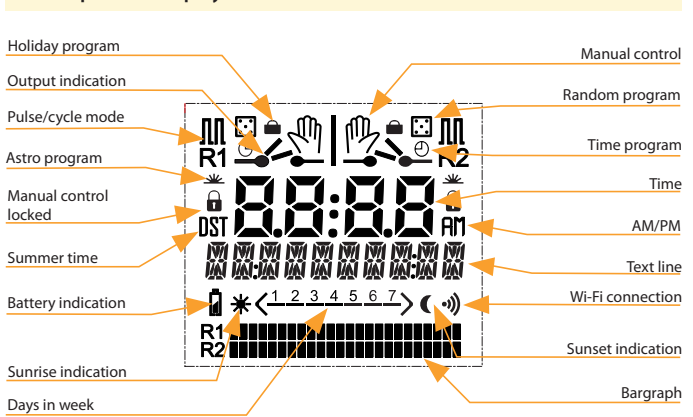

Connection

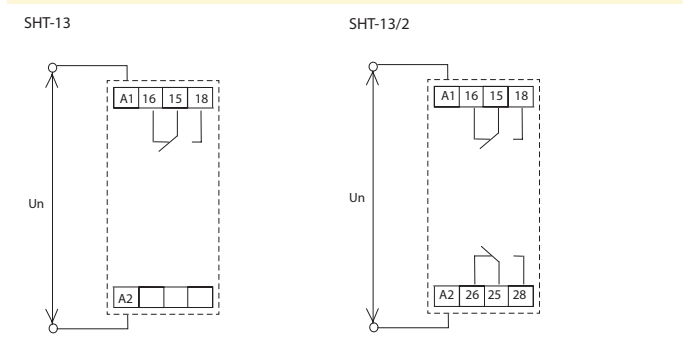

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Timers](#) category:

Click to view products by [ELKO EP](#) manufacturer:

Other Similar products are found below :

[H5S-WFB2D](#) [304E-007-A-00-PX](#) [305E-015-A-1-0-PX](#) [THR2U-110A](#) [81506944](#) [H7AN-RT6M](#) [AC100-240](#) [711-0131](#) [1SVR508130R0000](#)
[1SVR730100R3100](#) [H3RN-2 24VDC](#) [H3Y-2 AC24 10S](#) [81503028](#) [722-0001](#) [732-0023](#) [80.01.0.240.0000T](#) [81.01.0.230.0000T](#)
[88.92.0.240.0000](#) [12.A4.8.230.0010](#) [85.03.0.024.0000](#) [80.61.0.240.0000T](#) [LTR10](#) [SL555D](#) [SA555DR-HXY](#) [NE555P-HXY](#) [LM555DGKRG](#)
[ICM7555DRG](#) [LMC555DRG](#) [LMC555DGKRG](#) [TLC555DGKRG](#) [NE556DRG](#) [TLC555DRG](#) [LM555DRG](#) [TEMS](#) [TESD415](#) [SHT-3 /230V](#)
[12.61.8.230.0000](#) [OR-PRE-446\(GS\)](#) [12.A2.8.230.0000](#) [PCM-33](#) [SHT-1 /230V](#) [88.92.0.240.0001](#) [PCM-34](#) [80.41.0.240.0000T](#)
[12.62.8.230.0000](#) [85.03.8.240.0000](#) [CRM-93H/230V](#) [PCS-516AC](#) [PCM-32](#) [12.61.0.024.0000](#) [PCS-516DC](#)