

Specifications		
Radiating element	1/4 Wave Element	
Frequency range	824-960/1710-2170 MHz	
Peak gain	2.0 dBi	
Polarisation	Linear	
Return loss	<-7 dB	
Power rating	10W	
Cable / Connector	3M RG-174 and SMA-Male or FME-Female connector	
Dimensions	87 x 27mm (length x diameter at base excluding connector)	

Popular Ordering Options		
FMAG35153-SM-3K	PentaMag with 3M RG-174 and SMA-Male	
FMAG35153-FM-3K	PenatMag with 3M RG-174 and FME-Female	


 $Specifications \ subject \ to \ change \ without \ notice.$ 


5 Little Balmer Buckingham Industrial Park Buckingham MK18 1TF UK Tel: +44 (0)1280 824055 Fax: +44 (0)1280 817179 Email: sales@ead-ltd.com Web: www.ead-ltd.com





## PentaMag | Multiband Magnetic Antenna

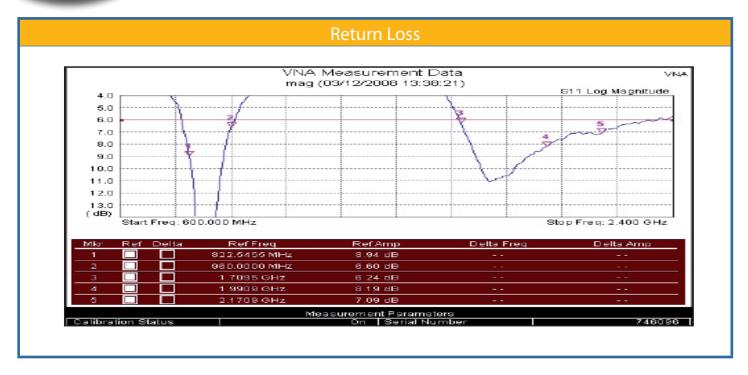

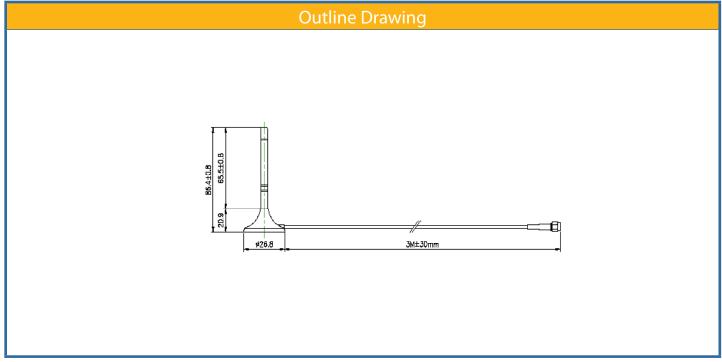

 $Specifications \ subject \ to \ change \ without \ notice.$ 

5 Little Balmer Buckingham Industrial Park Buckingham MK18 1TF UK Tel: +44 (0)1280 824055 Fax: +44 (0)1280 817179 Email: sales@ead-ltd.com Web: www.ead-ltd.com



## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Embedded Antenna Design manufacturer:

Other Similar products are found below:

CCT FM1 ABFT AD-NM-SMAF 001-0021 CTC110 MAF94149 EXE902SF MMCX-SMA-100 PDQ24496-91NF GAN30084EU 930-033-R A08-HABUF-P5I AAF95035 DG-ANT-20DP-BG-B APAMPGJ-141 1513563-1 OF86315-FNF OP24516DS-91NM A09-HASM-7 EXE902MD EXE902SM SPDA17806/2170LAR APAMPG-117 GPS1575SP26-004 GPS15MGSMA CMD69273P-30NF CMQ69273-30NF RD2458-5-OTDR-NM RD2458-5-RSMA TRAB24/49003 W4120ER5000 W6102B0100 YE572113-30RSMM 108-00014-50 SPDA17RP918 OP24516SX-91NM OP24516SX-91RSMM CMQ69273P-30NF CMS69273-30NF CMS69273P-30NF TRAB24003N TRAB8213NP TRAB8903 A09-Y8NF A09-Y11NF A09-HSM-7 A09-F8NF-M A09-F5NF-M