

Quintus

Penta-Band Internal PCB Antenna

Features

- Groundplane Independent
- Covers 850/900/1800/1900/2100 MHz bands
- Various cable/connector options
- Ideal for fixed and mobile terminals

Specifications	
Radiating element	1/2 Wave Element
Frequency range	850/900/1800/1900/2100 MHz
Gain	2 dBi
Polarisation	Linear
Return loss	-7.0 dB
Power rating	10W
Cable / Connector	Various including MMCX, U.FL, SMA
Dimensions	83x 22mm

Popular Ordering Options	
FQTN35144-MR-16	Quintus with 160mm RG-178 and MMCX Connector
FQTN35144-UF-10	Quintus with 100mm cable and U.FL Connector


Specifications subject to change without notice.


5 Little Balmer Buckingham Industrial Park Buckingham MK18 1TF UK Tel: +44 (0)1280 824055 Fax: +44 (0)1280 817179 Email: sales@ead-ltd.com Web: www.ead-ltd.com





Quintus | Penta-Band Internal PCB Antenna

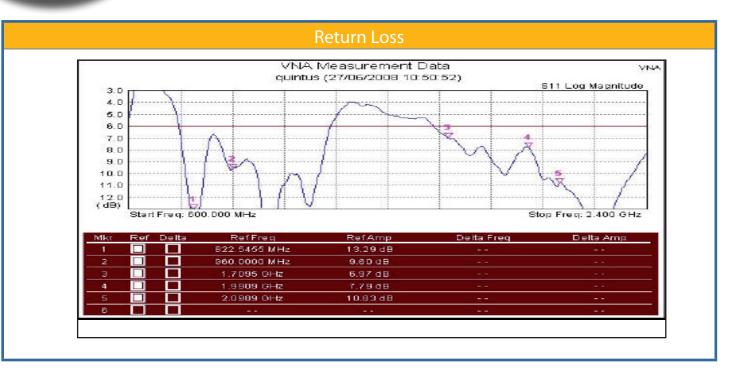

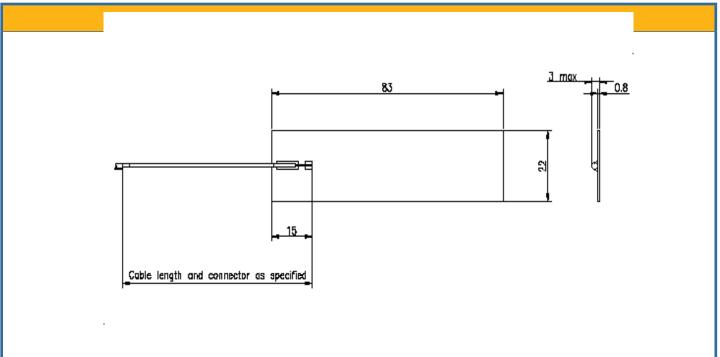

 $Specifications \ subject \ to \ change \ without \ notice.$

5 Little Balmer Buckingham Industrial Park Buckingham MK18 1TF UK Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Embedded Antenna Design manufacturer:

Other Similar products are found below:

CCT FM1 ABFT AD-NM-SMAF 001-0021 CTC110 MAF94149 EXE902SF MMCX-SMA-100 PDQ24496-91NF GAN30084EU 930-033-R A08-HABUF-P5I AAF95035 DG-ANT-20DP-BG-B APAMPGJ-141 1513563-1 OF86315-FNF OP24516DS-91NM A09-HASM-7 EXE902MD EXE902SM SPDA17806/2170LAR APAMPG-117 GPS1575SP26-004 GPS15MGSMA CMD69273P-30NF CMQ69273-30NF RD2458-5-OTDR-NM RD2458-5-RSMA TRAB24/49003 W4120ER5000 W6102B0100 YE572113-30RSMM 108-00014-50 SPDA17RP918 OP24516SX-91NM OP24516SX-91RSMM CMQ69273P-30NF CMS69273-30NF CMS69273P-30NF TRAB24003N TRAB8213NP TRAB8903 A09-Y8NF A09-Y11NF A09-HSM-7 A09-F8NF-M A09-F5NF-M