

# PRODUCT SPECIFICATION

SPEC. NO: T-0622-001p

DATE: Aug. 21, 2018

CUSTOMER'S PRODUCT NAME:

EMTEK PRODUCT NAME:

LCF1008-SERIES

THIS SPECIFICATION IS:

- FULLY ACCEPTED
- DENIED
- ACCEPTED UNDER THE FOLLOWING CONDITIONS



SIGNATURE: \_\_\_\_\_

DATE: \_\_\_\_\_

NAME(PRINT): \_\_\_\_\_

TITLE: \_\_\_\_\_

 **EMTEK CO., LTD.**

本文件內容全部或部份,未經兆欣科技股份有限公司同意不得以任何形式複製或其他用途  
All rights reserved.This document or parts thereof,may not be reproduced by any means or used in any manner without written permission of EMTEK CO.,LTD.

FACTORY:

39, Chingao Rd., (305)Hsinpu,  
Hsinchu Hsien, Taiwan, R. O. C

TEL: 03-5894-433

FAX: 03-5894-523

# PRODUCT SPECIFICATION

SPEC. NO.

T-0622-001p



## 1. Scope

This specification applies Ferrite Chip Inductance LCF1008-Series to be delivered to user.

## 2. Product Identification

LCF 1008 - 100 □ - T

(1) (2) (3) (4) (5)

(1) Product name

(2) Shapes and dimensions

(3) Inductance


100 : 10 uH

(4) Tolerance

J=±5% , K=±10%

(5) Taping Type

## 3. Shapes and Dimensions

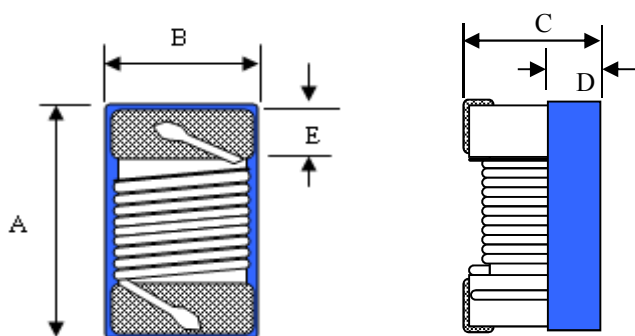

A max. : 2.90 mm


B max. : 2.54 mm

C max. : 2.0 mm

D ref. : 1.30 mm

E : 0.5 ± 0.1 mm

Equivalent circuit



No Polarity

| Drawn by              | Checked by            | Approved by         |
|-----------------------|-----------------------|---------------------|
| Cindy<br>Aug. 2. 2017 | Zheng<br>Aug. 2. 2017 | Shi<br>Aug. 2. 2017 |

# PRODUCT SPECIFICATION

SPEC. NO.

T-0622-001p



## 4. Electrical Characteristics

| Customer Part Number | Our Product Part Number | Inductance (uH)/MHz | Inductance Tolerance | Q/MHz Typ. | SRF(Min.) (MHz) | Rdc (Ω)Max. | Isat Max. (mA) | Irms Typ. (mA) | Color Coding |        |       |
|----------------------|-------------------------|---------------------|----------------------|------------|-----------------|-------------|----------------|----------------|--------------|--------|-------|
|                      |                         |                     |                      |            |                 |             |                |                | 1st          | 2nd    | 3rd   |
|                      | LCF1008-78N□-T          | 0.078/7.9           | J<br>K               | 19/7.9     | 1000            | 0.042       | 3200           | 2700           | Black        | Violet | Gray  |
|                      | LCF1008-R10□-T          | 0.10/25             | J<br>K               | 35/25      | 1500            | 0.05        | 3200           | 2700           | Brown        | Red    | Brown |
|                      | LCF1008-R22□-T          | 0.22/25             | J<br>K               | 35/25      | 800             | 0.15        | 2900           | 2400           | Red          | Red    | Brown |
|                      | LCF1008-R39□-T          | 0.39/25             | J<br>K               | 35/25      | 460             | 0.20        | 2100           | 1800           | Orgnge       | White  | Brown |
|                      | LCF1008-R47□-T          | 0.47/25             | J<br>K               | 35/25      | 460             | 0.20        | 2100           | 1800           | Yellow       | Violet | Brown |
|                      | LCF1008-R56□-T          | 0.56/25             | J<br>K               | 35/25      | 360             | 0.26        | 1800           | 1500           | Green        | Blue   | Brown |
|                      | LCF1008-R68□-T          | 0.68/25             | J<br>K               | 35/25      | 400             | 0.30        | 1700           | 1500           | Blue         | Gray   | Brown |
|                      | LCF1008-R82□-T          | 0.82/25             | J<br>K               | 35/25      | 360             | 0.35        | 1400           | 1200           | Gray         | Red    | Brown |
|                      | LCF1008-1R0□-T          | 1.0/7.9             | J<br>K               | 32/7.9     | 340             | 0.34        | 1700           | 1200           | Brown        | Black  | Red   |
|                      | LCF1008-1R1□-T          | 1.1/7.9             | J<br>K               | 25/7.9     | 300             | 0.34        | 1500           | 1100           | Brown        | Brown  | Red   |
|                      | LCF1008-1R2□-T          | 1.2/7.9             | J<br>K               | 25/7.9     | 300             | 0.25        | 1600           | 1100           | Brown        | Red    | Red   |
|                      | LCF1008-1R5□-T          | 1.5/7.9             | J<br>K               | 32/7.9     | 230             | 0.42        | 1200           | 1000           | Brown        | Green  | Red   |
|                      | LCF1008-1R8□-T          | 1.8/7.9             | J<br>K               | 27/7.9     | 180             | 0.45        | 1100           | 800            | Brown        | Gray   | Red   |
|                      | LCF1008-2R2□-T          | 2.2/7.9             | J<br>K               | 27/7.9     | 140             | 0.50        | 1100           | 900            | Red          | Red    | Red   |
|                      | LCF1008-2R7□-T          | 2.7/7.9             | J<br>K               | 27/7.9     | 130             | 0.55        | 1000           | 900            | Red          | Violet | Red   |
|                      | LCF1008-3R3□-T          | 3.3/7.9             | J<br>K               | 27/7.9     | 125             | 0.60        | 1000           | 900            | Orgnge       | Orgnge | Red   |
|                      | LCF1008-3R9□-T          | 3.9/7.9             | J<br>K               | 27/7.9     | 100             | 0.80        | 990            | 800            | Orgnge       | White  | Red   |
|                      | LCF1008-4R7□-T          | 4.7/7.9             | J<br>K               | 30/7.9     | 90              | 0.90        | 880            | 720            | Yellow       | Violet | Red   |

# PRODUCT SPECIFICATION

SPEC. NO.

T-0622-001p



## 4. Electrical Characteristics

| Customer Part Number | Our Product Part Number | Inductance (uH)/MHz | Inductance Tolerance | Q/MHz Typ. | SRF(Min.) (MHz) | Rdc (Ω)Max. | Isat Max. (mA) | Irms Typ. (mA) | Color Coding |        |        |
|----------------------|-------------------------|---------------------|----------------------|------------|-----------------|-------------|----------------|----------------|--------------|--------|--------|
|                      |                         |                     |                      |            |                 |             |                |                | 1st          | 2nd    | 3rd    |
|                      | LCF1008-5R6□-T          | 5.6/7.9             | J<br>K               | 27/7.9     | 60              | 1.00        | 850            | 720            | Green        | Blue   | Red    |
|                      | LCF1008-6R8□-T          | 6.8/7.9             | J<br>K               | 27/7.9     | 60              | 1.05        | 840            | 670            | Blue         | Gray   | Red    |
|                      | LCF1008-8R2□-T          | 8.2/7.9             | J<br>K               | 25/7.9     | 55              | 1.20        | 810            | 640            | Gray         | Red    | Red    |
|                      | LCF1008-100□-T          | 10/2.5              | J<br>K               | 23/2.5     | 55              | 1.55        | 700            | 540            | Brown        | Black  | Orange |
|                      | LCF1008-120□-T          | 12/2.5              | J<br>K               | 23/2.5     | 36              | 2.10        | 580            | 460            | Brown        | Red    | Orange |
|                      | LCF1008-150□-T          | 15/2.5              | J<br>K               | 23/2.5     | 36              | 2.38        | 580            | 460            | Brown        | Green  | Orange |
|                      | LCF1008-180□-T          | 18/2.5              | J<br>K               | 23/2.5     | 32              | 2.50        | 520            | 410            | Brown        | Gray   | Orange |
|                      | LCF1008-220□-T          | 22/2.5              | J<br>K               | 23/2.5     | 29              | 2.92        | 500            | 400            | Red          | Red    | Orange |
|                      | LCF1008-270□-T          | 27/2.5              | J<br>K               | 23/2.5     | 22              | 3.70        | 450            | 300            | Red          | Violet | Orange |
|                      | LCF1008-330□-T          | 33/2.5              | J<br>K               | 23/2.5     | 21              | 4.10        | 420            | 300            | Orgnge       | Orgnge | Orange |
|                      | LCF1008-390□-T          | 39/2.5              | J<br>K               | 18/2.5     | 15              | 5.50        | 340            | 270            | Orgnge       | White  | Orange |
|                      | LCF1008-470□-T          | 47/2.5              | J<br>K               | 23/2.5     | 17              | 7.80        | 310            | 220            | Yellow       | Violet | Orange |
|                      | LCF1008-680□-T          | 68/2.5              | J<br>K               | 20/2.5     | 9               | 11.50       | 220            | 180            | Blue         | Gray   | Orange |
|                      | LCF1008-101□-T          | 100/1               | J<br>K               | 13/1       | 4               | 13.20       | 210            | 170            | Brown        | Black  | Yellow |
|                      | LCF1008-151□-T          | 150/1               | J<br>K               | 13/1       | 3               | 22.50       | 170            | 160            | Brown        | Green  | Yellow |
|                      | LCF1008-221□-T          | 220/1               | J<br>K               | 13/1       | 3               | 26.50       | 160            | 100            | Red          | Red    | Yellow |
|                      | LCF1008-271□-T          | 270/1               | J<br>K               | 13/1       | 2               | 32.00       | 135            | 95             | Red          | Violet | Yellow |
|                      | LCF1008-331□-T          | 330/1               | J<br>K               | 13/1       | 2               | 32.50       | 130            | 90             | Orgnge       | Orgnge | Yellow |



# PRODUCT SPECIFICATION

SPEC. NO.

T-0622-001p

1. When ordering, please specify tolerance and packaging codes. Ex: LCF1008-4R7K-T

Tolerance : J =  $\pm 5\%$  , K =  $\pm 10\%$

Packaging : Clear tape and reel { standard }.

2. L、Q、SRF : Agilent E4991A RF Impedance/Material Analyzer +




Agilent 16197A Test Fixtures (The electrical specification test by the smallest gap position)

3. Rdc : Chroma Milliohmmeter 16502, or equivalent.

4. Isat for Inductance drop 35% from its value without current.

5. Operating temperature range from -25°C to 105°C.

6. Irms for a 40°C rise above 25°C ambient.

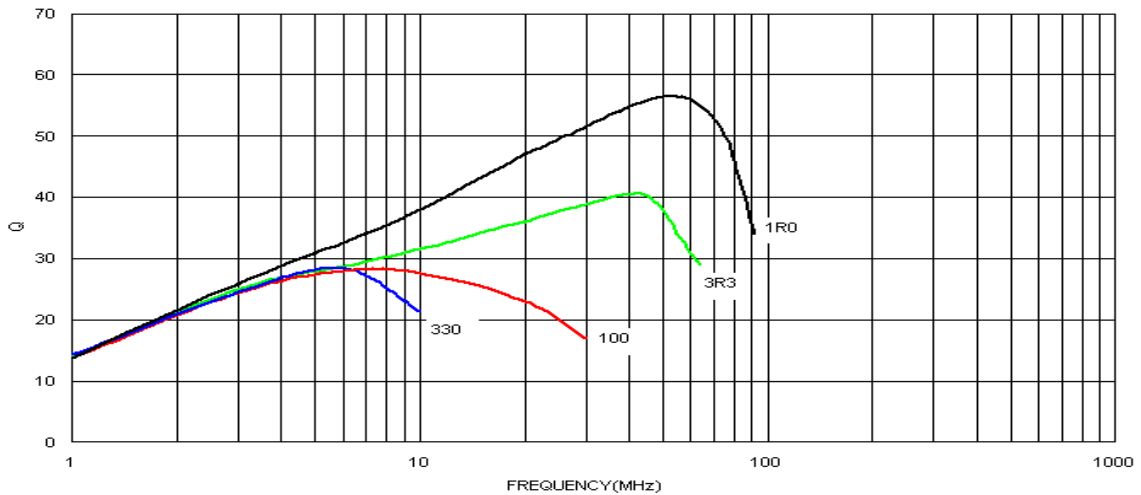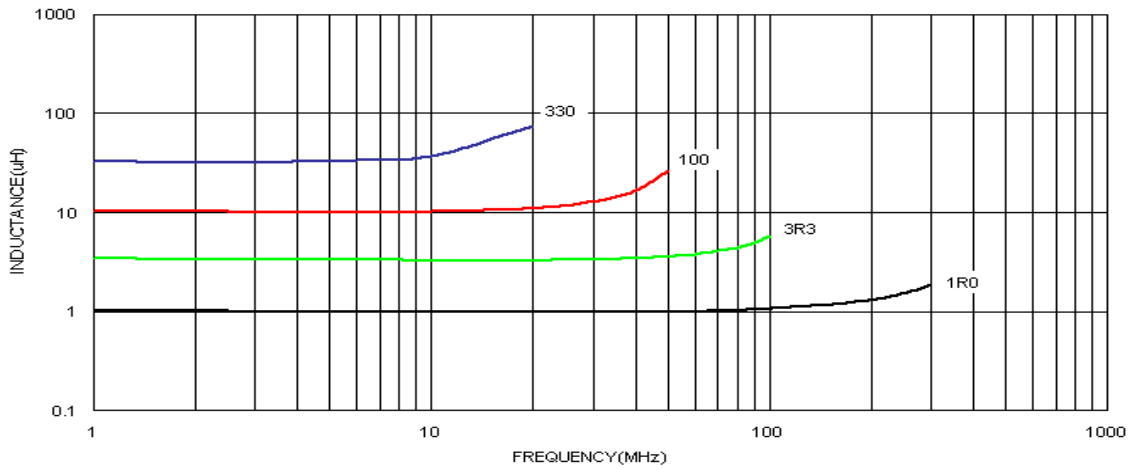

# PRODUCT SPECIFICATION


SPEC. NO.

T-0622-001p




LCF1008-1R8J-T

Ls V.S Frequency

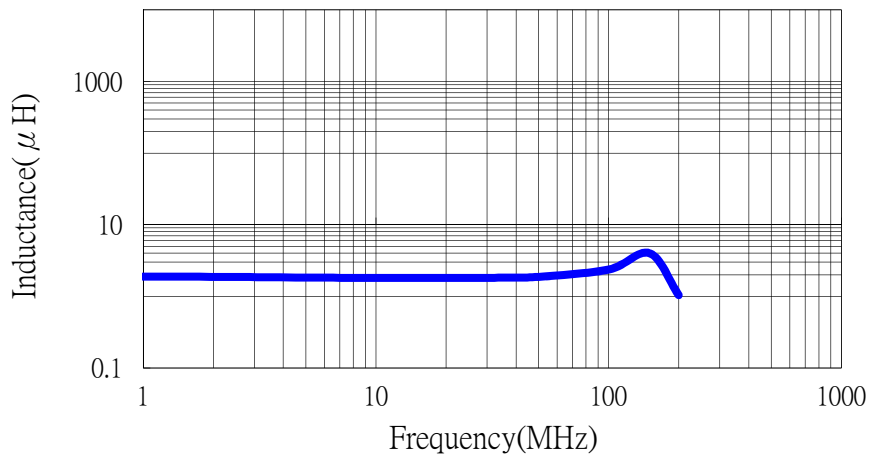

LCF1008-1R8J-T

Q V.S Frequency

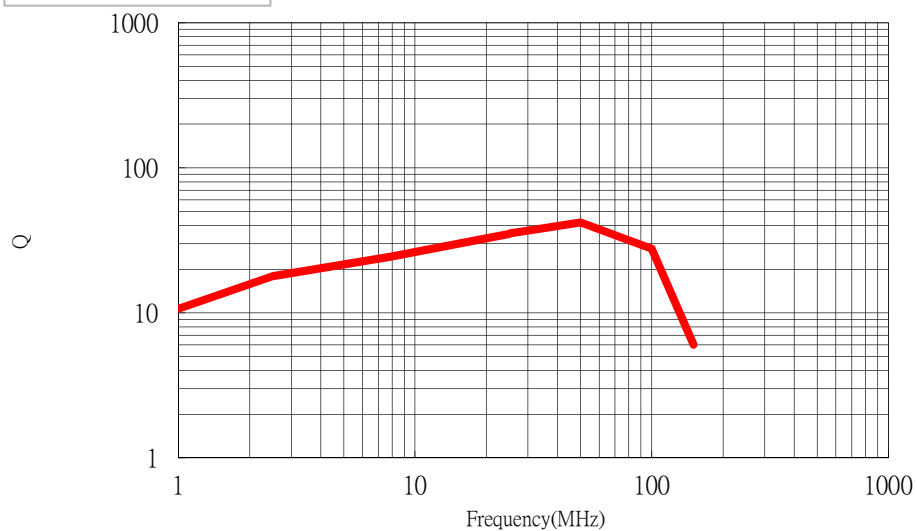

## 5. Material list

| Item  | Material     |
|-------|--------------|
| Core  | Ferrite core |
| Wire  | Copper wire  |
| Epoxy | UV Epoxy     |

# PRODUCT SPECIFICATION

SPEC. NO.

T-0622-001p



## 6. Reliability Test


| Item                           | Specifications   | Test conditions  |
|--------------------------------|--|--|
| Solderability                  | The metalized area must have 90% minimum solder coverage.  | Dip pads in flux and dip in solder pot( 96.5 Sn/3.5 Ag solder) at 255°C ±5°C.  |
| Resistance to soldering heat   | There must be no case deformation or change in dimensions.<br>Inductance must not change more than the stated tolerance. | Inductors shall be reflowed onto a PC board using 96.5 Sn/3.5 Ag solder paste.<br>Solder process shall be at a maximum temperature of 260°C.<br>For 96.5 Sn/3.5 Ag solder paste:>217°C for 90 seconds  |
| Vibration                      | There must be no case deformation or change in dimensions.<br>Inductance must not change more than the stated tolerance. | Solder specimen inductor on the test printed circuit board. Apply vibrations in each of the x,y and z directions for 2 hours for a total of 6 hours.<br>Frequency : 10~50 Hz<br>Amplitude : 1.5mm  |
| High temperature resistance    | There must be no case deformation or change in dimensions.<br>Inductance must not change more than the stated tolerance. | Inductors shall be subjected to temperature 105±2°C for 500±12 hours.<br>Measure the test items after leaving the inductors at room temperature and humidity for 2 hours.  |
| Static Humidity                | Inductors must not have a shorted or openwinding.  | Inductors shall be subjected to temperature 85±2°C and 90 to 95%RH. for ten 24-hours.<br>Measure the test items after leaving the inductors at room temperature and humidity for 2 hours.  |
| Component adhesion (push test) | Inductors shall be subjected to 1.8Kg  | Inductors shall be reflow soldered (255°C ±5°C for 10 seconds) to a tinned copper substrate.<br>A force gauge shall be applied to the side of the component.<br>The device must withstand the stated force without a failure of the termination. |

# PRODUCT SPECIFICATION

SPEC. NO.

T-0622-001p

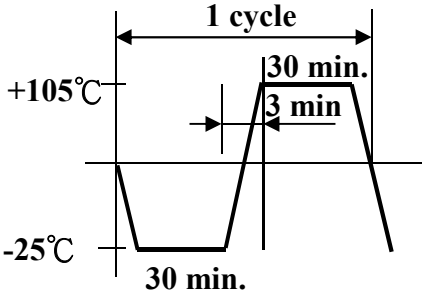

| Item                       | Specifications   | Test conditions  |
|----------------------------|--|--|
| Low temperature resistance | There must be no case deformation or change in dimensions.<br>Inductance must not change more than the stated tolerance. | Inductors shall be subjected to temperature $-25\pm 2^{\circ}\text{C}$ for $500\pm 12$ hours.<br>Measure the test items after leaving the inductors at room temperature and humidity for 1 to 2 hours.   |
| Resistance to solvent      | There must be no case deformation, change in dimensions, or obliteration of marking.                                     | Inductors must withstand 6 minutes of alcohol or water.  |
| Thermal Shock              | There must be no case deformation or change in dimensions.<br>Inductance must not change more than the stated tolerance. | Inductors shall be subjected to 10 cycles to the following temperature cycle: <div style="text-align: center;">  <p>The diagram illustrates a single temperature cycle. It starts at a baseline, drops to <math>-25^{\circ}\text{C}</math> and remains there for 30 minutes. Then, it ramps up to <math>+105^{\circ}\text{C}</math> in 3 minutes, stays at <math>+105^{\circ}\text{C}</math> for 30 minutes, and finally ramps down in 3 minutes. The total duration of one cycle is indicated as 1 cycle.</p> </div> Measure the test items after leaving the inductors at room temperature and humidity for 2 hours. |



# PRODUCT SPECIFICATION

SPEC. NO.


T-0622-001p



## 7. Packaging

The packaging must be done not to receive any damage during transporting and storing.


### 7-1 Tape dimensions

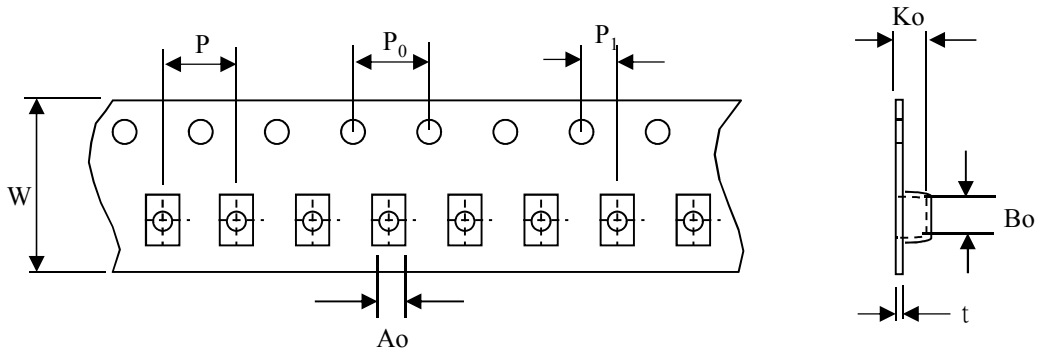

( Dimensions in mm; Tolerance :  $\pm 0.1$  )


| Symbol    | W | P | P <sub>0</sub> | P <sub>1</sub> | A <sub>o</sub> | Bo   | Ko | t    |
|-----------|---|---|----------------|----------------|----------------|------|----|------|
| Dimension | 8 | 4 | 4              | 2              | 2.5            | 2.85 | 2  | 0.22 |

### 7-2 Reel dimensions

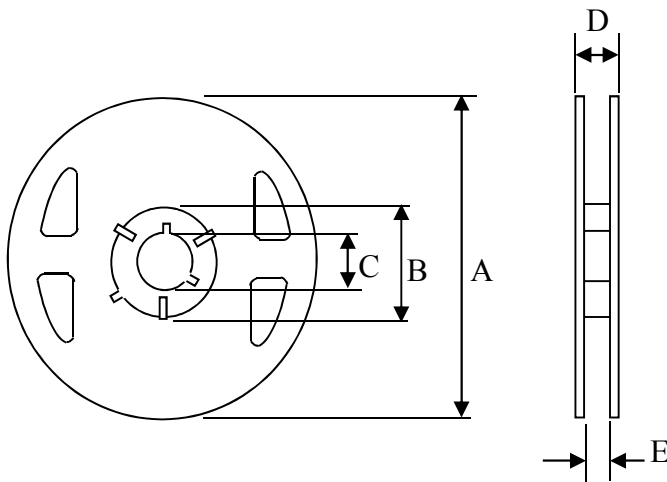

| Symbol | T    |
|--------|------|
| A      | 180  |
| B      | 60   |
| C      | 13   |
| D      | 14.4 |
| E      | 8.4  |

### 7-3 Tapping figure

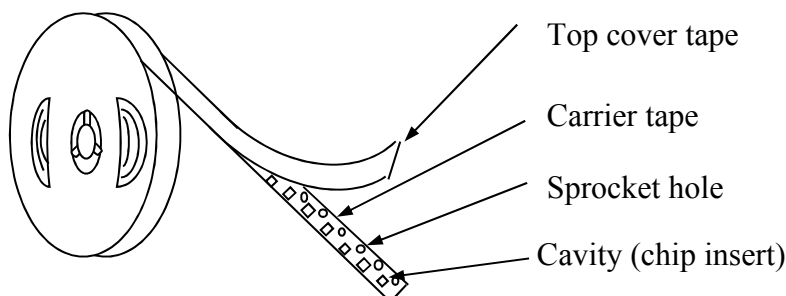

# PRODUCT SPECIFICATION


SPEC. NO.

T-0622-001p



## 7-4 Packaging Form

There shall not continuation more than two vacancies of the product.

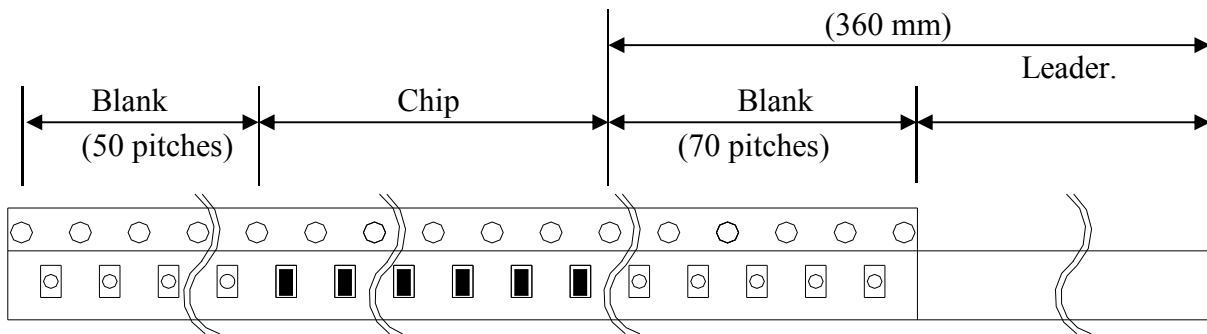


## 7-5 Cover Tape Peel Strength

The force for tearing off cover tape is 0.1~0.6(N) in the arrow direction at the following conditions:

Temperature : 5 ~ 35°C

Humidity : 45 ~ 85%

Atmospheric pressure : 860 ~ 1060 hpa

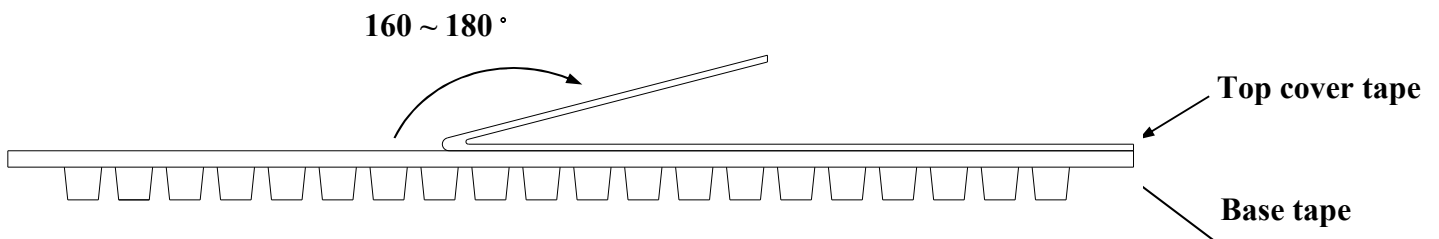

## 7-6 Packing Quantity

φ180 mm reel type : 2,000 pcs./reel

# PRODUCT SPECIFICATION

SPEC. NO.


T-0622-001p



## 8. Recommended Soldering Conditions

(Please use this product by reflow soldering)


### 8-1 Recommended Footprint

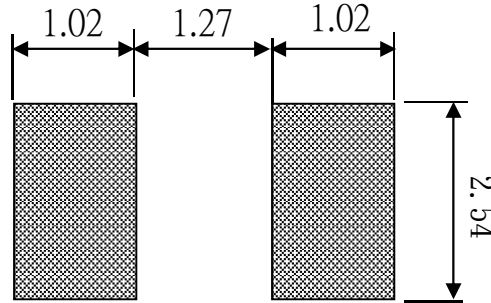

Unit: mm

### 8-2 Recommended Reflow Pattern

Reflow at 260°C/3 Cycles

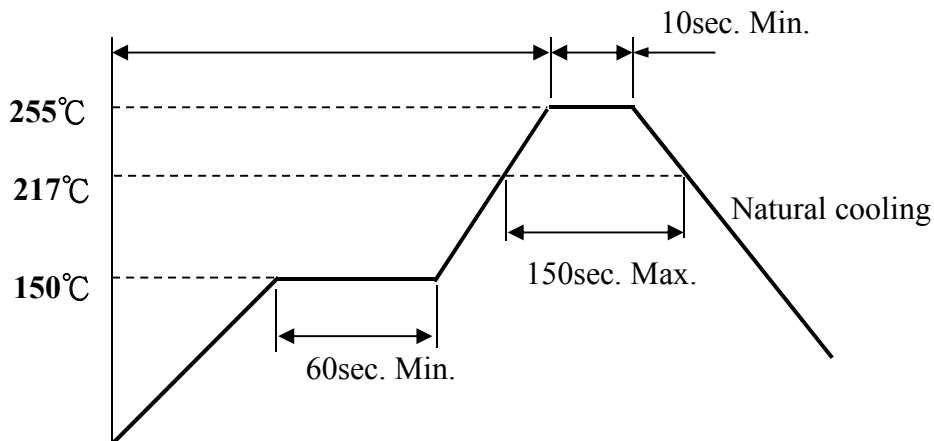

### 8-3 Iron Soldering

Use a solder iron of less than 30W when soldering, do not allow the soldering iron to directly touch the Ceramic body outside of terminal electrode.

5 seconds max. at 260°C.

## 9. Attention in Case of Using

In case of using product, please avoid following matters:

Splashing water or salt water

Dew condenses

Toxic gas (Hydrogen sulfide, Sulfurous acid, Chlorine, Ammonia)

Vibrations or shocks which exceed the specified condition

Please be careful for the stress to this product by board flexure or something after the mounting.

## 10. Others

10-1 Operating temperature range : Ferrite Series : -25~+105°C

10-2 Storage condition : Temperature 20°~25°C, Relative Humidity 40%~60%

10-3 Recommended wire wound inductors should be used within 6 months from the time of delivery.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [EMTEK](#) manufacturer:*

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#)  
[MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC3-R50-R](#) [HC8-1R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#)  
[ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#)