


1-800-383-7323 USA/CAN www.energizer.com


ENERGIZER EN93



Industry Standard Dimensions

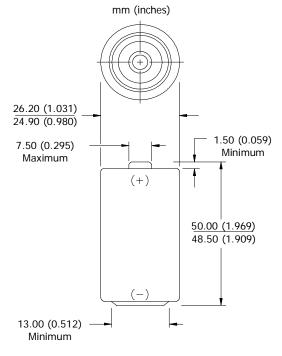


Constant Resistance Performance

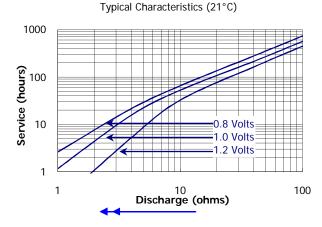

Classification: Chemical System:


Designation: Nominal Voltage: Nominal IR: Operating Temp: Typical Weight: Typical Volume: Jacket: Shelf Life: Terminal: Specifications NOT INTENDED FOR RETAIL TRADE Alkaline Zinc-Manganese Dioxide (Zn/MnO 2) No added mercury or cadmium ANSI-14A, IEC-LR14 1.5 volts 150 to 300 milliohms (fresh)* -18°C to 55°C (0°F to 130°F) 66.2 grams (2.3 oz.) 26.9 cubic centimeters (1.6 cubic inch) Plastic Label 7 years at 21°C (80% of initial capacity) Flat Contact

* For additional information, please reference the IR technical white paper.

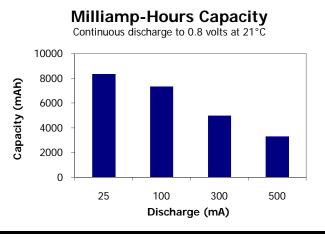

Constant Current Performance

Typical Characteristics (21°C)

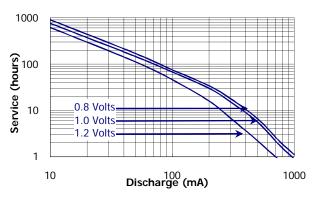

Important Notice


This data sheet contains typical information specific to products manufactured at the time of its publication. © Energizer Holdings, Inc. - Contents herein do not constitute a warranty.



1-800-383-7323 USA/CAN www.energizer.com

ENERGIZER EN93



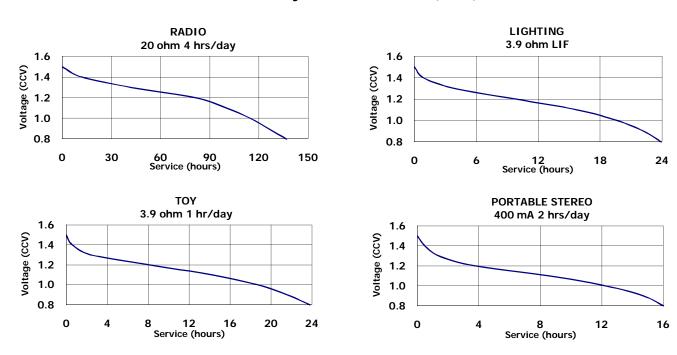

Industry Standard Tests (21°C)

Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication. © Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Cylindrical Battery Contacts, Clips, Holders & Springs category:

Click to view products by Energizer manufacturer:

Other Similar products are found below :

 753-00001
 12BH36A-GR
 200
 183
 270
 QX3506
 5220
 5230
 1055
 1088
 5250
 166
 591
 1044
 KT0008
 1119
 254TR
 5207
 1121
 246

 4027003022001-PK
 12BHC186P2-GR
 9V (6LR61)
 PX1604
 1012
 1020
 1023
 1024
 1075
 1077
 1080
 1090
 1095
 1097
 1098
 1109

 1126
 1127
 1128
 1162
 1173
 147
 148
 149
 150
 151
 152
 153
 154
 155