


ENERGIZER 10 size - Mercury Free






Industry Standard Dimensions



Typical Discharge Characteristics

ANSI/IEC Industry Standards / Hearing Aid High Drain (5/1.5 mA .1S/1H59M 59.9S 12H at 21C)



Specifications

Chemical System: Zinc Air (Zn/O₂)

Tab Color: Yellow

Designation: ANSI-7005ZD, IEC-PR70

Nominal Voltage: 1.4 Volts


Typical Capacity: 98 mAh (to 1.05 volts) (IEC-STD at 5/1 at 21°C)

Typical Weight: 0.32 grams (0.01 oz.)

Typical Volume: 0.08 cubic centimeters (0.005 cubic inch)

Typical Discharge Characteristics

IEC Industry Standards / Hearing Aid Standard (5/1 mA .1S/1H59M 59.9S 12H at 21C)

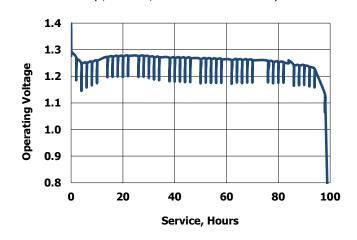

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.

Contents herein do not constitute a warranty and are for reference only.

Form No. 10GL0318 Page 1 of 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for energizer manufacturer:

Other Similar products are found below:

A544 1215F2X3 AC312 635706 637871 639830 S9025 HARD CASE RECHARGEABLE HARD CASE PRO MULTI USE S9029 639826 HCHD311 HARD CASE PROFF 4AA HARDCASE PRO HEADLIGHT 639618 RCLINM2WR S8707 S8100 7638900424478 7638900313130 626177 E300116200 639838 603386 S8865 HARDCASE PRO WORK LIGHT 603305 E300280600 METAL LED 6AA S8864 HDD32E MS2AALED ENERGIZER® 2-IN-1 LANTERN HANDHELD E300124200 E300171700 ENFFL81E E300112600 633474 HDA32E 7638900421422 HARD CASE PRO PIVOT HCSP61E 7638900424485 AC675 HDC32E E300115800 AZ10DP-8 638006 7638900419580 HTKC2BUCS