


1-800-383-7323 USA/CAN www.energizer.com

D

Specifications Classification: Alkaline Energizer **Chemical System:** Zinc-Manganese Dioxide (Zn/MnO₂) No added mercury or cadmium **Designation:** ANSI-13A, IEC-LR20 1.5 volts Nominal Voltage: Nominal IR: 150 to 300 milliohms (fresh) **Operating Temp:** -18°C to 55°C (0°F to 130°F) mm (inches) Typical Weight: 144.0 grams (5.1 oz.) **Typical Volume:** 56.0 cubic centimeters (3.4 cubic inch) Jacket: Plastic Label Shelf Life: 10 years at 21°C Terminal: Flat Contact 34.20 (1.346) 1.50 (0.059) 32.30 (1.272) Milliamp-Hours Capacity Minimum 9.50 (0.374) Continuous discharge to 0.8 volts at 21°C Maximum


61.50 (2.421)

59.50 (2.343)

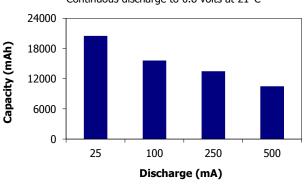

Device Selection Guide:

(-)

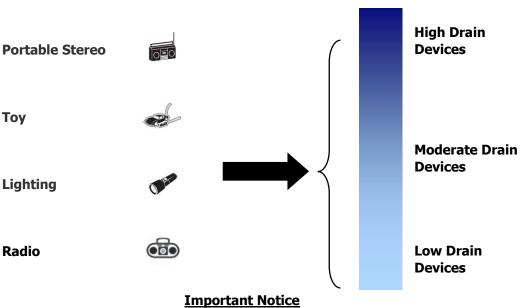

This data sheet contains typical information specific to products manufactured at the time of its publication. ©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

ENERGIZER E95

Industry Standard Dimensions

(+)


18.00 (0.709) Minimum

Battery Selection Indicator




ENERGIZER E95



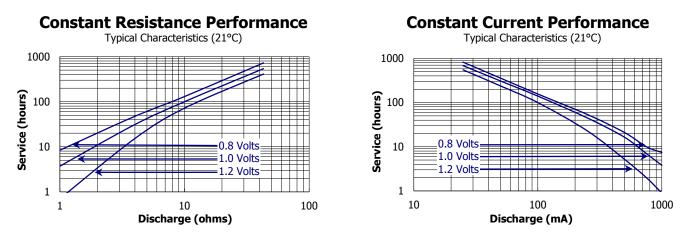

Industry Standard Tests (21°C)

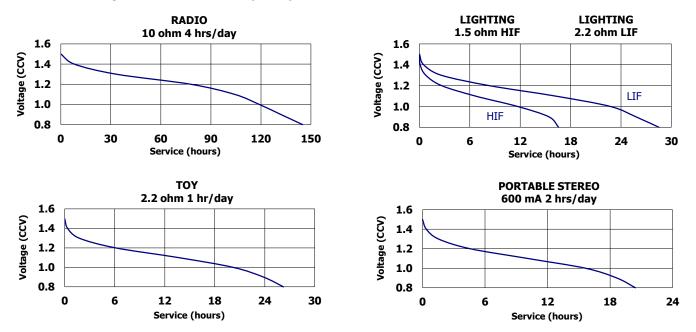

Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication. ©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Control Switches category:

Click to view products by Energizer manufacturer:

Other Similar products are found below :

80887-99 80932-99 86855-00 88814-30 1424293-1 HW4S-2TC10 89721-12 89804-08 SSN RL01801 ASD2L20N-LVO 50051857-17 50099156-001-05 51.155R-15200 50058920-26 CP-FA51 CP-FA49 ACCU-SC/L-3000 PP9M PP87G PP86GA PP71G PP70G PP6G PP62G PP58BL PP56G PP86GB PP77GA PP76G PP4M PP47G PP46G PP41M PP40G PP32G RD-20 PP23M PP12G PORTAPRO POM-2708 PNB-2005 3057.0012 CV-075 CV-140SB CV-150 CV-150S 214X20XK CV-180 CV-200MB