kHz RANGE CRYSTAL UNIT

FC-135R NEW FC-135/FC-255

•Frequency range : 32.768 kHz (32 kHz to 100 kHz) •External dimensions : 3.2 x 1.5 x 0.80 mm ··· FC-135R/FC-135

: $4.9 \times 1.8 \times 0.80 \text{ mm} \cdots \text{FC-}255$

•Overtone order : Fundamental

•Applications : Small communications devices



Product Number (please contact us)
FC-135R : X1A000141xxxx00
FC-135 : Q1xFC1350xxxx00
FC-255 : Q1xFC2550xxxx00





Actual size

FC-135R/FC-135	FC-255
A501J	A501J

Specifications (characteristics)


Item	Cymphol	Specifications				Conditions / Remarks	
item	Symbol	FC-135R	FC-	135	FC-255		Conditions / Remarks
Nominal frequency range	f_nom	32.768 kHz	32.768 kHz	32 kHz to 77.5 kHz	32.768 kHz	32 kHz to 100 kHz	Please contact us about available frequencies.
Storage temperature	T_stg	-55 °C to +125 °C					Storage as single product.
Operating temperature	T_use	-40 °C to +85 °C					
Level of drive	DL	0.5 μW (1.0 μW Max.) 0.5 μW Max.				V Max.	Please contact us if you require 1.0µW Max.
Frequency tolerance (standard)	f_tol	±20 × 10 ⁻⁶					+25 °C, DL=0.1 μW Please ask for tighter tolerance
Turnover temperature	Ti	+25 °C ±5 °C					
Parabolic coefficient	В	-0.04 × 10 ⁻⁶ / °C ² Max.					
Load capacitance	CL	7 pF, 9 pF, 12.5 pF			7 pF, 12.5 pF		Please specify
Motional resistance (ESR)	R1	50 kΩ Max.	70 kΩ Max.	70 kΩ to 45 kΩ	65 kΩ Max.	70 kΩ to 30 kΩ	
Motional capacitance	C1	3.4 fF Typ.	3.4 fF Typ.	3.7 fF to 1.6 fF	2.0 fF Typ.	2.3 fF to 0.6 fF	
Shunt capacitance	C0	1.1 pF Typ.	1.0 pF Typ.	1.3 pF to 0.5 pF	1.3 pF Typ.	1.7 pF to 0.9 pF	
Frequency aging	f_age	$\pm 3 \times 10^{-6}$ / year Max.					+25 °C, First year

①Model ②Frequency ③Load capacitance(pF) ④Frequency t

④Frequency tolerance(x 10⁻⁶, +25 °C)


External dimensions



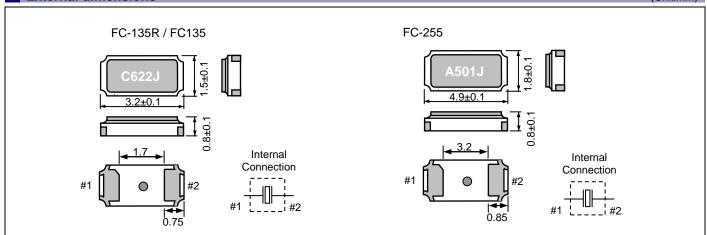

Footprint (Recommended)

(Unit:mm)

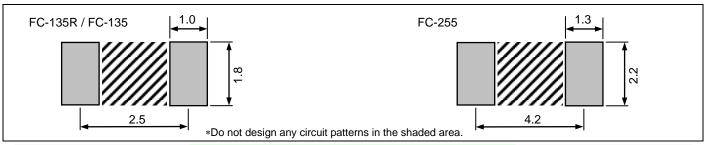

PROMOTION OF ENVIRONMENTAL MANAGEMENT SYSTEM CONFORMING TO INTERNATIONAL STANDARDS

At Seiko Epson, all environmental initiatives operate under the Plan-Do-Check-Action (PDCA) cycle designed to achieve continuous improvements. The environmental management system (EMS) operates under the ISO 14001 environmental management standard.

All of our major manufacturing and non-manufacturing sites, in Japan and overseas, completed the acquisition of ISO 14001 certification.

ISO 14000 is an international standard for environmental management that was established by the International Standards Organization in 1996 against the background of growing concern regarding global warming, destruction of the ozone layer, and global deforestation.

WORKING FOR HIGH QUALITY

In order provide high quality and reliable products and services than meet customer needs.

Seiko Epson made early efforts towards obtaining ISO9000 series certification and has acquired ISO9001 for all business establishments in Japan and abroad. We have also acquired ISO/TS 16949 certification that is requested strongly by major automotive manufacturers as standard.

ISO/TS16949 is the international standard that added the sector-specific supplemental requirements for automotive industry based on ISO9001.

Explanation of the mark that are using it for the catalog



►Pb free.



- ► Complies with EU RoHS directive.
 - *About the products without the Pb-free mark.

 Contains Pb in products exempted by EU RoHS directive.

 (Contains Pb in sealing glass, high melting temperature type solder or other.)



▶ Designed for automotive applications such as Car Multimedia, Body Electronics, Remote Keyless Entry etc.



▶ Designed for automotive applications related to driving safety (Engine Control Unit, Air Bag, ESC etc).

Notice

- This material is subject to change without notice.
- Any part of this material may not be reproduced or duplicated in any form or any means without the written permission of Seiko Epson.
- The information about applied data, circuitry, software, usage, etc. written in this material is intended for reference only. Seiko Epson
 does not assume any liability for the occurrence of customer damage or infringing on any patent or copyright of a third party. This
 material does not authorize the licensing for any patent or intellectual copyrights.
- When exporting the products or technology described in this material, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
- You are requested not to use the products (and any technical information furnished, if any) for the development and/or manufacture of
 weapon of mass destruction or for other military purposes. You are also requested that you would not make the products available to
 any third party who may use the products for such prohibited purposes.
- These products are intended for general use in electronic equipment. When using them in specific applications that require extremely high reliability, such as the applications stated below, you must obtain permission from Seiko Epson in advance.
 - / Space equipment (artificial satellites, rockets, etc.) / Transportation vehicles and related (automobiles, aircraft, trains, vessels, etc.) / Medical instruments to sustain life / Submarine transmitters / Power stations and related / Fire work equipment and security equipment / traffic control equipment / and others requiring equivalent reliability.
- · All brands or product names mentioned herein are trademarks and/or registered trademarks of their respective.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Other Tools category:

Click to view products by Epson manufacturer:

Other Similar products are found below:

CR-05FL7--150R CR-05FL7--698K 899-2-KT46 899-5-KT46 CR-0AFL4--332K CR-12FP4--260R CRCW04021100FRT7

CRCW04021961FRT7 5800-0090 CRCW04024021FRT7 CRCW040254R9FRT7 CRCW0603102JRT5 59065-5 00-8273-RDPP 00-8729WHPP 593033 593058 593072 593564100 593575 593591 593593 011349-000 CRCW08052740FRT1 LUC-012S070DSM LUC018S070DSP 599-2021-3-NME 599-JJ-2021-03 00-5080-YWPP 5E4750/01-20R0-T/R LW1A-L1-GL LW1A-P1-GD LW1L-A1C10V-GL
LW1L-M1C70-A 0202-0173 00-9089-RDPP 00-9300-RDPP CRCW2010331JR02 01-1003W-8/32-10 601-GP-08-KT39 601-JJ-06 601-SPB
601YSY 602-JJ-03 602SPB 602Z 603-JJ-07-FP 603-JJY-04 604J 604-JJ-05