kHz RANGE CRYSTAL UNIT

MC-146 / MC-146 TYPE

RoHS Compliant

Product Number
MC-146 : Q1xMC1462xxxx0X

- Frequency range : MC-146···32.768 kHz
  : MC-146 TYPE···32 kHz to 100 kHz
- External dimension : 7.0 × 1.5 × 1.4 mm
- Overtone order : Fundamental
- Applications : Small communications devices

Specifications (characteristics)

Item	Symbol	Specifications		Conditions / Remarks
		MC-146	MC-146 TYPE	
Nominal frequency range	f_nom	32.768 kHz	32 kHz to 100 kHz	Please contact us about available frequencies.
Storage temperature	T_stg	-55 °C to +125 °C		Storage as single product.
Operating temperature	T_use	-40 °C to +85 °C		
Level of drive	DL	1.0 μW Max.		Operating Drive level 0.5 μW Max.
Frequency tolerance (standard)	f_tol	± 20 × 10^{-6}, ± 50 × 10^{-6}	± 50 × 10^{-6}, ± 100 × 10^{-6}	+25 °C, DL=0.1 μW
Turnover temperature	Ti	+25 °C ± 5 °C		
Parabolic coefficient	B	-0.04 × 10^{-6} / °C^2 Max.		
Load capacitance	CL	7 pF, 9 pF, 12.5 pF		Please specify
Motional resistance (ESR)	R1	65 kΩ Max.	65 kΩ to 25 kΩ	
Motional capacitance	C1	1.9 fF Typ.	2.5 fF to 0.6 fF	
Shunt capacitance	C0	0.8 pF Typ.	1.2 pF to 0.5 pF	
Frequency aging	f_age	±3 × 10^{-6} / year Max.	±5 × 10^{-6} / year Max.	+25 °C, First year

Product name (Standard form): MC-146 ① 32.768000kHz ② 12.5 ③ +20.0-20.0 ④

①Model ②Frequency ③Load capacitance(pF) ④Frequency tolerance(× 10^{-6}, +25 °C)

External dimensions

(Unit:mm)

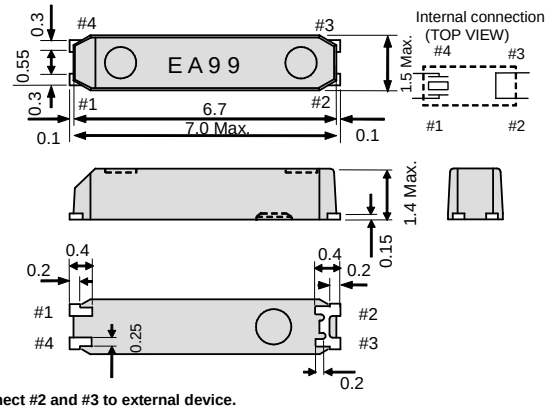

Do not connect #2 and #3 to external device.
The metal case inside of the molding compound may be exposed on the top or bottom of this product.
This purely cosmetic and does not have any effect on quality, reliability or electrical specs.

Footprint (Recommended)

(Unit:mm)

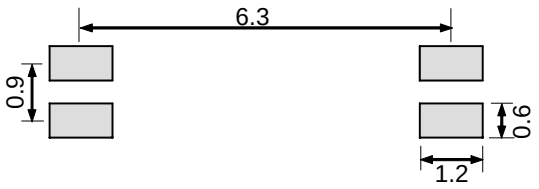

PROMOTION OF ENVIRONMENTAL MANAGEMENT SYSTEM CONFORMING TO INTERNATIONAL STANDARDS

At Seiko Epson, all environmental initiatives operate under the Plan-Do-Check-Action (PDCA) cycle designed to achieve continuous improvements. The environmental management system (EMS) operates under the ISO 14001 environmental management standard.

All of our major manufacturing and non-manufacturing sites, in Japan and overseas, completed the acquisition of ISO 14001 certification.

ISO 14000 is an international standard for environmental management that was established by the International Standards Organization in 1996 against the background of growing concern regarding global warming, destruction of the ozone layer, and global deforestation.

WORKING FOR HIGH QUALITY

In order provide high quality and reliable products and services than meet customer needs, Seiko Epson made early efforts towards obtaining ISO9000 series certification and has acquired ISO9001 for all business establishments in Japan and abroad. We have also acquired IATF 16949 certification that is requested strongly by major automotive manufacturers as standard.

IATF 16949 is the international standard that added the sector-specific supplemental requirements for automotive industry based on ISO9001.

►Explanation of the mark that are using it for the catalog

	►Pb free.
	►Complies with EU RoHS directive. *About the products without the Pb-free mark. Contains Pb in products exempted by EU RoHS directive. (Contains Pb in sealing glass, high melting temperature type solder or other.)
	►Designed for automotive applications such as Car Multimedia, Body Electronics, Remote Keyless Entry etc.
	►Designed for automotive applications related to driving safety (Engine Control Unit, Air Bag, ESC etc).

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Crystals ***category:***

Click to view products by Epson ***manufacturer:***

Other Similar products are found below :

MC405 32.0000K-R3:PURE SN 7B-27.000MBBK-T MP1-8.0 99-BU 9B-15.360MBBK-B PTX-A2JM-10.000M 9C-7.680MBBK-T H10S-12.000-18-EXT-TR R38-32.768-12.5-5PPM-NPB BTD1062E05A-513 21U15A-21.4MHZ RTX-781DF1-S-20.950 LFXTAL066198Cutt 9C-14.31818MBBK-T A-11.000MHZ-27 SPT2A-.032768B SPT2A.032768G SSPT7F-9PF20-R FX325BS-38.88EEM1201 MP-1-25.000MHZ-3L MP-1-6.000MHZ LFXTAL065253Cutt LFXTAL066431Cutt XT9S20ANA14M7456 XT9SNLANA16M 646G-24-2 7B-30.000MBBK-T 6504-202-1501 6526-202-1501 BTJ120E02C SG636PCE-20.000MC 3404 CM315D32768EZFT C1E-24.000-7-2020-R C1E-19.200-12-1530-X-R C1E-16.000-12-1530-X-R ABM11-16.000MHZ-9-B1U-T FL5000014 EUCA18-3.1872M 425F35E027M0000 17196 ABM3-13.52313MHZ-10-B4Y-T MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au VXM7-1C1-16M000 MS1V-T1K-32.768kHz-10pF-20PPM-TA-QC-Au MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au ECS-80-18-30-JGN-TR 17000 17301 16875