

**Crystal Oscillator (SPXO)**

- Package size (2.0 mm × 1.6 mm × 0.7 mm)
- Fundamental mode SPXO
- Output: CMOS
- Reference weight Typ.9.9 mg

**[ 1 ] Product Number / Product Name / Marking**

(1-1) Product Number / Ordering Code

**X1G0048010020xx**

Last 2 digits code(xx) defines Quantity.

The standard is "00", 3 000 pcs/Reel.

(1-2) Product Name / Model Name

**SG2016CAN 48.000000 MHz TJGA****[ 2 ] Operating Range**

| Parameter                   | Symbol            | Specifications |      |      | Unit | Conditions |
|-----------------------------|-------------------|----------------|------|------|------|------------|
|                             |                   | Min.           | Typ. | Max. |      |            |
| Supply voltage              | V <sub>CC</sub>   | 1.60           | -    | 3.63 | V    | -          |
|                             | GND               | 0              | -    | 0    | V    | -          |
| Operating temperature range | T <sub>use</sub>  | -40            | -    | +85  | °C   | -          |
| CMOS load condition         | L <sub>CMOS</sub> | -              | -    | 15   | pF   | -          |

**[ 3 ] Frequency Characteristics**

(Unless stated otherwise [ 2 ] Operating Range)

| Parameter              | Symbol           | Specifications |           |      | Unit              | Conditions         |
|------------------------|------------------|----------------|-----------|------|-------------------|--------------------|
|                        |                  | Min.           | Typ.      | Max. |                   |                    |
| Output frequency       | f <sub>o</sub>   | -              | 48.000000 | -    | MHz               | -                  |
| Frequency tolerance *1 | f <sub>tol</sub> | -50            | -         | +50  | ×10 <sup>-6</sup> | T <sub>use</sub>   |
| Frequency aging        | f <sub>age</sub> | -3             | -         | +3   | ×10 <sup>-6</sup> | +25 °C, First year |

\*1 Frequency tolerance includes Initial frequency tolerance, Frequency / temperature characteristics, Frequency / voltage coefficient and Frequency / load coefficient.

**[ 4 ] Electrical Characteristics**

(Unless stated otherwise [ 2 ] Operating Range)

| Parameter                | Symbol              | Specifications       |      |                      | Unit | Conditions  |
|--------------------------|---------------------|----------------------|------|----------------------|------|---|
|                          |                     | Min.                 | Typ. | Max.                 |      |   |
| Start-up time            | t <sub>str</sub>    | -                    | -    | 3.0                  | ms   | t = 0 at 90 % V <sub>CC</sub>   |
| Current consumption      | I <sub>CC</sub>     | -                    | -    | 2.6                  | mA   | No load condition, V <sub>CC</sub> = 3.3 V  |
| Stand-by current         | I <sub>std</sub>    | -                    | -    | 2.7                  | μA   | ST = GND, V <sub>CC</sub> = 3.3 V   |
| Output voltage           | V <sub>OH</sub>     | 90 % V <sub>CC</sub> | -    | -                    | V    | I <sub>OH</sub> = -4 mA @V <sub>CC</sub> = 3.3 V  |
|                          | V <sub>OL</sub>     | -                    | -    | 10 % V <sub>CC</sub> | V    | I <sub>OL</sub> = 4 mA @V <sub>CC</sub> = 3.3 V   |
| Rise time                | t <sub>r</sub>      | -                    | -    | 3.5                  | ns   | 20 % V <sub>CC</sub> to 80 % V <sub>CC</sub> Level, L <sub>CMOS</sub> = 15 pF, V <sub>CC</sub> = 1.8 V ± 10 % |
| Fall time                | t <sub>f</sub>      | -                    | -    | 3.5                  | ns   | 80 % V <sub>CC</sub> to 20 % V <sub>CC</sub> Level, L <sub>CMOS</sub> = 15 pF, V <sub>CC</sub> = 1.8 V ± 10 % |
| Symmetry                 | SYM                 | 45                   | -    | 55                   | %    | 50 % V <sub>CC</sub> Level, L <sub>CMOS</sub> ≤ 15 pF   |
| Input voltage            | V <sub>IH</sub>     | 80 % V <sub>CC</sub> | -    | -                    | V    | ST terminal   |
|                          | V <sub>IL</sub>     | -                    | -    | 20 % V <sub>CC</sub> | V    | ST terminal   |
| Output disable time (ST) | t <sub>stp_st</sub> | -                    | -    | 100                  | ns   | ST terminal HIGH → LOW  |
| Output enable time (ST)  | t <sub>sta_st</sub> | -                    | -    | 3                    | ms   | ST terminal LOW → HIGH  |

**[ For other general specifications, please refer to the attached Full Data Sheet below ]**

# Crystal oscillator: SG2016 / 3225 / 5032 / 7050CAN & SG-210STF

## Features


- Crystal oscillator (SPXO)
- Frequency: 20 standard frequencies  
(4 MHz to 72 MHz)
- Output: CMOS
- Supply voltage: 1.6 V to 3.63 V
- Operating temperature: -20 °C to +70 °C  
-40 °C to +105 °C

## Applications

- IoT, Wearable device
- Data center, Storage
- Medical, Industrial automation


## Description

Epson's SGxxxxCAN & SG-210STF are Simple Packaged Crystal Oscillator (SPXO) series with CMOS output. These SPXO's are ideal for variety of applications from IoT, wearables, medical, industrial automation, etc. These SPXO have low current consumption, wide operating voltage from 1.6 V to 3.63 V and wide operating temperature range from -40 °C to 85 °C, in addition operation up to 105 °C is available. These SPXO's are available in five different package size from 2.0 × 1.6 mm to 7.0 × 5.0 mm and available in standard pin out's.

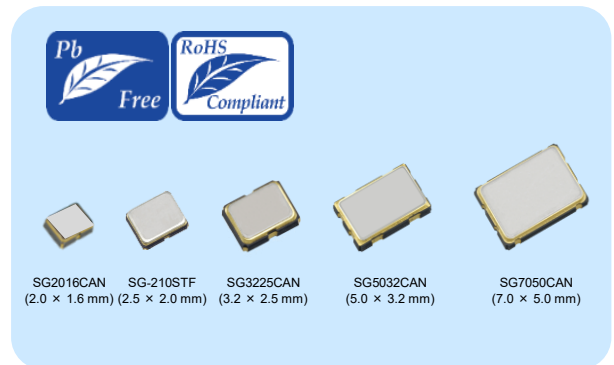


## Outline Drawing and Terminal Assignment


SG2016CAN

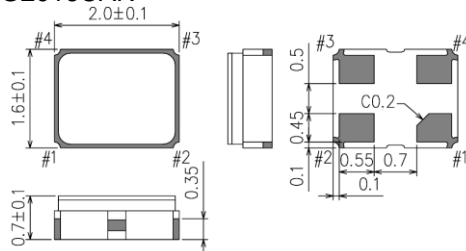


SG-210STF

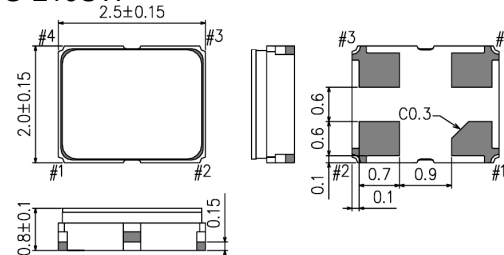


SG3225CAN

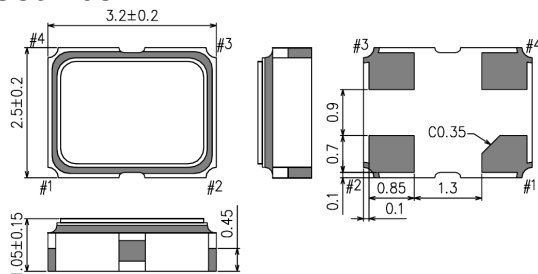

SG5032CAN

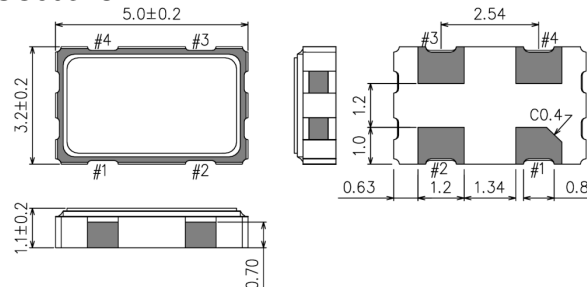

SG7050CAN

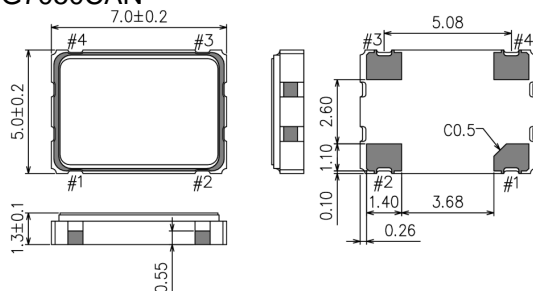

## Terminal Assignment

| Pin # | Connection      | Function                 |                  |                              |
|-------|-----------------|--------------------------|------------------|------------------------------|
|       |                 | ST terminal              | Osc. Circuit     | Output                       |
| #1    | ST              | ST function              | Oscillation      | Specified frequency : Enable |
|       |                 | "H" or OPEN              | Oscillation stop | High impedance : Disable     |
|       |                 | "L"                      |                  |                              |
| #2    | GND             | GND terminal             |                  |                              |
| #3    | OUT             | Output terminal          |                  |                              |
| #4    | V <sub>CC</sub> | V <sub>CC</sub> terminal |                  |                              |

## [ 1 ] Product Name / Product Number

(1-1) SG2016CAN

(1) Product Name (Standard Form)

SG2016 CAN 25.000000MHz TJHA

① ② ③ ④⑤⑥⑦

①Model ②Output (C:CMOS) ③Frequency ④Supply voltage

⑤Frequency tolerance ⑥Operating temperature ⑦Internal identification code ("A" is default)

| ④Supply voltage Refer to Figure 1 |                     |
|-----------------------------------|---------------------|
| T                                 | 1.8 V to 3.3 V Typ. |
| K                                 | 2.5 V to 3.3 V Typ. |

\*Figure 1 is on the next page

| ⑤Frequency tolerance / ⑥Operating temperature |   |
|---|---|
| DB  | $\pm 25 \times 10^{-6}$ / -20 °C to +70 °C  |
| JG  | $\pm 50 \times 10^{-6}$ / -40 °C to +85 °C  |
| JH  | $\pm 50 \times 10^{-6}$ / -40 °C to +105 °C |

(2) Product Number / Ordering Code

| Frequency [MHz] | Frequency tolerance / Operating temperature |   |  |
|-----------------|---|---|--|
|                 | DB  | JG  | JH   |
|                 | $\pm 25 \times 10^{-6}$<br>-20 °C to +70 °C | $\pm 50 \times 10^{-6}$<br>-40 °C to +85 °C | $\pm 50 \times 10^{-6}$<br>-40 °C to +105 °C |
| 4               | -   | X1G004801003000                             | X1G004801004900                              |
| 8               | -   | X1G004801004500                             | X1G004801004600                              |
| 10              | -   | X1G004801002900                             | X1G004801002700                              |
| 12              | X1G004801005000                             | X1G004801000700                             | X1G004801005100                              |
| 12.288          | X1G004801005200                             | X1G004801004400                             | X1G004801005300                              |
| 14.7456         | -   | X1G004801005400                             | X1G004801005500                              |
| 16              | -   | X1G004801001400                             | X1G004801005600                              |
| 20              | X1G004801005700                             | X1G004801005800                             | X1G004801001800                              |
| 24              | X1G004801005900                             | X1G004801000200                             | X1G004801004000                              |
| 24.576          | -   | X1G004801006000                             | X1G004801003100                              |
| 25              | X1G004801002400                             | X1G004801001200                             | X1G004801003500                              |
| 26              | -   | X1G004801000300                             | X1G004801003900                              |
| 27              | -   | X1G004801006100                             | X1G004801002100                              |
| 32              | -   | X1G004801006200                             | X1G004801006300                              |
| 33.33           | -   | X1G004801006400                             | X1G004801006500                              |
| 33.3333         | -   | X1G004801002600                             | X1G004801006600                              |
| 40              | -   | X1G004801006700                             | X1G004801003600                              |
| 48              | X1G004801006800                             | X1G004801002000                             | X1G004801006900                              |
| 50              | X1G004801007000                             | X1G004801001300                             | X1G004801002800                              |
| 72              | X1G004801007100                             | X1G004801007200                             | X1G004801007300                              |

## (1-2) SG-210STF

## (1) Product Name (Standard Form)

SG-210 S T F 25.000000 MHz Y

① ②③ ④ ⑤

① Model ② Function (S:Standby) ③ Supply voltage

④ Frequency ⑤ Frequency tolerance / Operating temperature

|                                    |                     |
|------------------------------------|---------------------|
| ③ Supply voltage Refer to Figure 1 |                     |
| T                                  | 1.8 V to 3.3 V Typ. |

\*Figure 1 is on the next page

|   |   |
|---|---|
| ⑤ Frequency tolerance / Operating temperature |   |
| S   | $\pm 25 \times 10^{-6}$ / -20 °C to +70 °C  |
| L   | $\pm 50 \times 10^{-6}$ / -40 °C to +85 °C  |
| Y   | $\pm 50 \times 10^{-6}$ / -40 °C to +105 °C |

## (2) Product Number / Ordering Code

| Frequency [MHz] | Frequency tolerance / Operating temperature |   |  |
|-----------------|---|---|--|
|                 | S   | L   | Y  |
|                 | $\pm 25 \times 10^{-6}$<br>-20 °C to +70 °C | $\pm 50 \times 10^{-6}$<br>-40 °C to +85 °C | $\pm 50 \times 10^{-6}$<br>-40 °C to +105 °C |
| 4               | -   | X1G004171000900                             | X1G004171029900                              |
| 8               | -   | X1G004171001500                             | X1G004171006900                              |
| 10              | -   | X1G004171001600                             | X1G004171036500                              |
| 12              | X1G004171016300                             | X1G004171001800                             | X1G004171028000                              |
| 12.288          | X1G004171006100                             | X1G004171001900                             | X1G004171036600                              |
| 14.7456         | -   | X1G004171002500                             | X1G004171036700                              |
| 16              | -   | X1G004171002700                             | X1G004171015400                              |
| 20              | X1G004171021800                             | X1G004171002900                             | X1G004171023800                              |
| 24              | X1G004171015600                             | X1G004171003100                             | X1G004171019700                              |
| 24.576          | -   | X1G004171003200                             | X1G004171036800                              |
| 25              | X1G004171007700                             | X1G004171003300                             | X1G004171005900                              |
| 26              | -   | X1G004171003400                             | X1G004171024400                              |
| 27              | -   | X1G004171003500                             | X1G004171025000                              |
| 32              | -   | X1G004171004000                             | X1G004171012700                              |
| 33.33           | -   | X1G004171011900                             | X1G004171030000                              |
| 33.3333         | -   | X1G004171012000                             | X1G004171007500                              |
| 40              | -   | X1G004171004500                             | X1G004171020600                              |
| 48              | X1G004171007800                             | X1G004171004600                             | X1G004171036900                              |
| 50              | X1G004171007900                             | X1G004171004700                             | X1G004171012600                              |
| 72              | X1G004171037000                             | X1G004171012400                             | X1G004171037100                              |

## (1-3) SG3225CAN

## (1) Product Name (Standard Form)

SG3225 C AN 25.000000MHz T J H A

① ② ③ ④⑤⑥⑦

①Model ②Output (C:CMOS) ③Frequency ④Supply voltage

⑤Frequency tolerance ⑥Operating temperature ⑦Internal identification code ("A" is default)

| ④Supply voltage Refer to Figure 1 |                     |
|-----------------------------------|---------------------|
| T                                 | 1.8 V to 3.3 V Typ. |
| K                                 | 2.5 V to 3.3 V Typ. |

\*Figure 1 is on the next page

| ⑤Frequency tolerance / ⑥Operating temperature |   |
|---|---|
| DB  | $\pm 25 \times 10^{-6}$ / -20 °C to +70 °C  |
| JG  | $\pm 50 \times 10^{-6}$ / -40 °C to +85 °C  |
| JH  | $\pm 50 \times 10^{-6}$ / -40 °C to +105 °C |

## (2) Product Number / Ordering Code

| Frequency [MHz] | Frequency tolerance / Operating temperature |   |  |
|-----------------|---|---|--|
|                 | DB  | JG  | JH   |
|                 | $\pm 25 \times 10^{-6}$<br>-20 °C to +70 °C | $\pm 50 \times 10^{-6}$<br>-40 °C to +85 °C | $\pm 50 \times 10^{-6}$<br>-40 °C to +105 °C |
| 4               | -   | X1G005961001115                             | X1G005961001215                              |
| 8               | -   | X1G005961000415                             | X1G005961001315                              |
| 10              | -   | X1G005961000515                             | X1G005961001415                              |
| 12              | X1G005961001515                             | X1G005961000615                             | X1G005961001615                              |
| 12.288          | X1G005961001715                             | X1G005961001815                             | X1G005961001915                              |
| 14.7456         | -   | X1G005961002015                             | X1G005961002115                              |
| 16              | -   | X1G005961002215                             | X1G005961002315                              |
| 20              | X1G005961002415                             | X1G005961000715                             | X1G005961002515                              |
| 24              | X1G005961002615                             | X1G005961000115                             | X1G005961002715                              |
| 24.576          | -   | X1G005961000815                             | X1G005961002815                              |
| 25              | X1G005961002915                             | X1G005961000215                             | X1G005961003015                              |
| 26              | -   | X1G005961003115                             | X1G005961003215                              |
| 27              | -   | X1G005961003315                             | X1G005961003415                              |
| 32              | -   | X1G005961003515                             | X1G005961003615                              |
| 33.33           | -   | X1G005961003715                             | X1G005961003815                              |
| 33.3333         | -   | X1G005961003915                             | X1G005961004015                              |
| 40              | -   | X1G005961000915                             | X1G005961004115                              |
| 48              | X1G005961004215                             | X1G005961000315                             | X1G005961004315                              |
| 50              | X1G005961004415                             | X1G005961001015                             | X1G005961004515                              |
| 72              | X1G005961004615                             | X1G005961004715                             | X1G005961004815                              |

## (1-4) SG5032CAN

## (1) Product Name (Standard Form)

SG5032 C AN 25.000000MHz T J H A

① ② ③ ④⑤⑥⑦

①Model ②Output (C:CMOS) ③Frequency ④Supply voltage

⑤Frequency tolerance ⑥Operating temperature ⑦Internal identification code ("A" is default)

| ④Supply voltage Refer to Figure 1 |                     |
|-----------------------------------|---------------------|
| T                                 | 1.8 V to 3.3 V Typ. |
| K                                 | 2.5 V to 3.3 V Typ. |

\*Figure 1 is on the next page

| ⑤Frequency tolerance / ⑥Operating temperature |   |
|---|---|
| DB  | $\pm 25 \times 10^{-6}$ / -20 °C to +70 °C  |
| JG  | $\pm 50 \times 10^{-6}$ / -40 °C to +85 °C  |
| JH  | $\pm 50 \times 10^{-6}$ / -40 °C to +105 °C |

## (2) Product Number / Ordering Code

| Frequency [MHz] | Frequency tolerance / Operating temperature |   |  |
|-----------------|---|---|--|
|                 | DB  | JG  | JH   |
|                 | $\pm 25 \times 10^{-6}$<br>-20 °C to +70 °C | $\pm 50 \times 10^{-6}$<br>-40 °C to +85 °C | $\pm 50 \times 10^{-6}$<br>-40 °C to +105 °C |
| 4               | -   | X1G004451003400                             | X1G004451019600                              |
| 8               | -   | X1G004451002100                             | X1G004451019700                              |
| 10              | -   | X1G004451001300                             | X1G004451017800                              |
| 12              | X1G004451019800                             | X1G004451002800                             | X1G004451019900                              |
| 12.288          | X1G004451020000                             | X1G004451000100                             | X1G004451020100                              |
| 14.7456         | -   | X1G004451001900                             | X1G004451020200                              |
| 16              | -   | X1G004451000200                             | X1G004451020300                              |
| 20              | X1G004451020400                             | X1G004451001100                             | X1G004451020500                              |
| 24              | X1G004451017200                             | X1G004451000300                             | X1G004451020600                              |
| 24.576          | -   | X1G004451002900                             | X1G004451020700                              |
| 25              | X1G004451009700                             | X1G004451000400                             | X1G004451020800                              |
| 26              | -   | X1G004451008200                             | X1G004451020900                              |
| 27              | -   | X1G004451000500                             | X1G004451021000                              |
| 32              | -   | X1G004451001400                             | X1G004451021100                              |
| 33.33           | -   | X1G004451021200                             | X1G004451021300                              |
| 33.3333         | -   | X1G004451016700                             | X1G004451021400                              |
| 40              | -   | X1G004451001200                             | X1G004451021500                              |
| 48              | X1G004451014900                             | X1G004451000700                             | X1G004451011200                              |
| 50              | X1G004451011500                             | X1G004451000800                             | X1G004451003600                              |
| 72              | X1G004451021600                             | X1G004451021700                             | X1G004451021800                              |

## (1-5) SG7050CAN

## (1) Product Name (Standard Form)

SG7050 C AN 25.000000MHz T J H A

① ② ③ ④⑤⑥⑦

①Model ②Output (C:CMOS) ③Frequency ④Supply voltage

⑤Frequency tolerance ⑥Operating temperature ⑦Internal identification code ("A" is default)

| ④Supply voltage Refer to Figure 1 |                     |
|-----------------------------------|---------------------|
| T                                 | 1.8 V to 3.3 V Typ. |
| K                                 | 2.5 V to 3.3 V Typ. |

\*Figure 1 is on the next page

| ⑤Frequency tolerance / ⑥Operating temperature |   |
|---|---|
| DB  | $\pm 25 \times 10^{-6}$ / -20 °C to +70 °C  |
| JG  | $\pm 50 \times 10^{-6}$ / -40 °C to +85 °C  |
| JH  | $\pm 50 \times 10^{-6}$ / -40 °C to +105 °C |

## (2) Product Number / Ordering Code

| Frequency [MHz] | Frequency tolerance / Operating temperature |   |  |
|-----------------|---|---|--|
|                 | DB  | JG  | JH   |
|                 | $\pm 25 \times 10^{-6}$<br>-20 °C to +70 °C | $\pm 50 \times 10^{-6}$<br>-40 °C to +85 °C | $\pm 50 \times 10^{-6}$<br>-40 °C to +105 °C |
| 4               | -   | X1G004481005100                             | X1G004481025200                              |
| 8               | -   | X1G004481001400                             | X1G004481025300                              |
| 10              | -   | X1G004481000500                             | X1G004481025400                              |
| 12              | X1G004481025500                             | X1G004481000600                             | X1G004481025600                              |
| 12.288          | X1G004481025700                             | X1G004481000100                             | X1G004481025800                              |
| 14.7456         | -   | X1G004481002500                             | X1G004481025900                              |
| 16              | -   | X1G004481000700                             | X1G004481026000                              |
| 20              | X1G004481012800                             | X1G004481000800                             | X1G004481026100                              |
| 24              | X1G004481002200                             | X1G004481000200                             | X1G004481026200                              |
| 24.576          | -   | X1G004481001600                             | X1G004481026300                              |
| 25              | X1G004481011600                             | X1G004481000300                             | X1G004481026400                              |
| 26              | -   | X1G004481003500                             | X1G004481026500                              |
| 27              | -   | X1G004481000400                             | X1G004481026600                              |
| 32              | -   | X1G004481000900                             | X1G004481026700                              |
| 33.33           | -   | X1G004481017900                             | X1G004481026800                              |
| 33.3333         | -   | X1G004481003300                             | X1G004481026900                              |
| 40              | -   | X1G004481001500                             | X1G004481027000                              |
| 48              | X1G004481022600                             | X1G004481001100                             | X1G004481027100                              |
| 50              | X1G004481011200                             | X1G004481001200                             | X1G004481016000                              |
| 72              | X1G004481027200                             | X1G004481018300                             | X1G004481027300                              |

## [ 2 ] Absolute Maximum Ratings


| Parameter                 | Symbol           | Specification |      |                       | Unit | Conditions               |
|---------------------------|------------------|---------------|------|-----------------------|------|--------------------------|
|                           |                  | Min.          | Typ. | Max.                  |      |                          |
| Maximum supply voltage    | V <sub>CC</sub>  | -0.3          | -    | 4                     | V    |                          |
| Input voltage             | V <sub>in</sub>  | -0.3          | -    | V <sub>CC</sub> + 0.3 | V    | $\overline{ST}$ terminal |
| Storage temperature range | T <sub>stg</sub> | -55           | -    | +125                  | °C   | SG2016CAN                |
|                           |                  | -40           | -    | +125                  | °C   | All other                |

## [ 3 ] Operating Range

| Parameter  | Symbol            | Specification |      |      | Unit | Conditions  |
|--|-------------------|---------------|------|------|------|---|
|  |                   | Min.          | Typ. | Max. |      |   |
| Supply voltage                                     | V <sub>CC</sub>   | 1.6           | -    | 3.63 | V    | f <sub>o</sub> ≤ 50 MHz,<br>T <sub>use</sub> = +105 °C Max. |
|  |                   | 1.71          | -    | 3.63 | V    | f <sub>o</sub> = 72 MHz,<br>T <sub>use</sub> = +85 °C Max.  |
|  |                   | 2.25          | -    | 3.63 | V    | f <sub>o</sub> = 72 MHz,<br>T <sub>use</sub> = +105 °C Max. |
| Supply voltage                                     | GND               | 0.0           | 0.0  | 0.0  | V    |   |
| Operating temperature range<br>(Refer to Figure 1) | T <sub>use</sub>  | -20           | +25  | +70  | °C   |   |
|  |                   | -40           | +25  | +85  | °C   |   |
|  |                   | -40           | +25  | +105 | °C   |   |
| CMOS load condition                                | L <sub>CMOS</sub> | -             | -    | 15   | pF   |   |

\* Power supply startup time (0 %V<sub>CC</sub> → 90 %V<sub>CC</sub>) should be more than 150 μs

\* A 0.01 μF to a 0.1 μF bypass capacitor should be connected between V<sub>CC</sub> and GND pins located close to the device

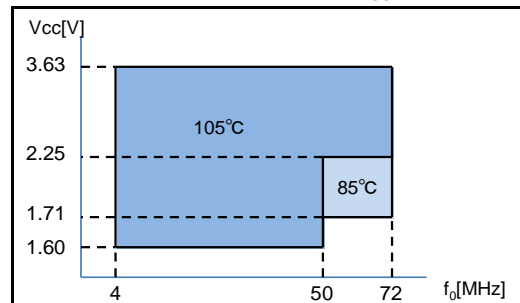

Please note that Supply voltage range (V<sub>CC</sub>) depends on Output frequency(f<sub>o</sub>) and upper limit of Operating temperature(T<sub>use</sub> Max.).

Figure 1: The upper limit of Operating temperature and the related conditions

## [ 4 ] Frequency Characteristics

(Unless stated otherwise [ 3 ] Operating Range)

| Parameter              | Symbol           | Specification   |      |      | Unit              | Conditions   |
|------------------------|------------------|---|------|------|-------------------|--|
|                        |                  | Min.  | Typ. | Max. |                   |  |
| Output frequency       | f <sub>o</sub>   | 4, 8, 10, 12, 12.288, 14.7456, 16, 20, 24, 24.576, 25, 26, 27, 32, 33.33, 33.3333, 40, 48, 50, 72 |      |      | MHz               |  |
| Frequency tolerance *1 | f <sub>tol</sub> | -50   | -    | +50  | ×10 <sup>-6</sup> | T <sub>use</sub> = -20 °C to +70 °C  |
|                        |                  | -100  |      | +100 | ×10 <sup>-6</sup> | T <sub>use</sub> = -40 °C to +105 °C<br>T <sub>use</sub> = -40 °C to +85 °C *2 |
| Frequency aging        | f <sub>age</sub> | -3  |      | +3   | ×10 <sup>-6</sup> | +25 °C, First year   |

\*1 Frequency tolerance includes initial frequency tolerance, temperature variation, supply voltage change and load drift.

\*2 This temperature range is only for f<sub>o</sub> = 75 MHz



## [ 5 ] Electrical Characteristics

(Unless stated otherwise [ 3 ] Operating Range)

| Parameter   | Symbol                | Specification        |                      |                      | Unit  | Conditions  |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
|---|-----------------------|----------------------|----------------------|----------------------|---|---|--------------|--------------|--------------|-----------------|-----------------|---------|-------|-----------------|-----------------|--------|------|------|
|   |                       | Min.                 | Typ.                 | Max.                 |   |   |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
| Start-up time   | t_str                 | -                    | -                    | 3                    | ms  | t = 0 at 90 %V <sub>CC</sub>  |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
| Current consumption (No load)<br>V <sub>CC</sub> = 1.8 V ± 10 % | I <sub>CC</sub>       | -                    | -                    | 1.5                  | mA  | 1 MHz ≤ fo ≤ 20 MHz   |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
|   |                       | -                    | -                    | 1.8                  | mA  | 20 MHz < fo ≤ 40 MHz  |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
|   |                       | -                    | -                    | 2.1                  | mA  | 40 MHz < fo ≤ 50 MHz  |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
| V <sub>CC</sub> = 1.8 V ± 5 %                                   |                       | -                    | -                    | 2.4                  | mA  | fo = 72 MHz   |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
| Current consumption (No load)<br>V <sub>CC</sub> = 2.5 V ± 10 % |                       | -                    | -                    | 1.6                  | mA  | 1 MHz ≤ fo ≤ 20 MHz   |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
|   |                       | -                    | -                    | 2.0                  | mA  | 20 MHz < fo ≤ 40 MHz  |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
|   |                       | -                    | -                    | 2.4                  | mA  | 40 MHz < fo ≤ 50 MHz  |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
| Current consumption (No load)<br>V <sub>CC</sub> = 3.3 V ± 10 % |                       | -                    | -                    | 2.8                  | mA  | fo = 72 MHz   |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
|   |                       | -                    | -                    | 1.8                  | mA  | 1 MHz ≤ fo ≤ 20 MHz   |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
|   | -                     | -                    | 2.2                  | mA                   | 20 MHz < fo ≤ 40 MHz  |   |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
| Stand-by current  | I_std                 | -                    | -                    | 2.1                  | μA  | V <sub>CC</sub> = 1.8 V ± 10 % or ± 5 %, $\overline{ST}$ = GND  |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
|   |                       | -                    | -                    | 2.5                  | μA  | V <sub>CC</sub> = 2.5 V ± 10 %, $\overline{ST}$ = GND   |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
|   |                       | -                    | -                    | 2.7                  | μA  | V <sub>CC</sub> = 3.3 V ± 10 %, $\overline{ST}$ = GND   |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
| Output voltage  | V <sub>OH</sub>       | 90 % V <sub>CC</sub> | -                    | -                    | V   | Load current condition<br><table border="1"> <tr> <td></td> <td>1.8 V ± 10 %</td> <td>2.5 V ± 10 %</td> <td>3.3 V ± 10 %</td> </tr> <tr> <td>I<sub>OH</sub></td> <td>-1.5 mA</td> <td>-3 mA</td> <td>-4 mA</td> </tr> <tr> <td>I<sub>OL</sub></td> <td>1.5 mA</td> <td>3 mA</td> <td>4 mA</td> </tr> </table> |              | 1.8 V ± 10 % | 2.5 V ± 10 % | 3.3 V ± 10 %    | I <sub>OH</sub> | -1.5 mA | -3 mA | -4 mA           | I <sub>OL</sub> | 1.5 mA | 3 mA | 4 mA |
|   |                       | 1.8 V ± 10 %         | 2.5 V ± 10 %         | 3.3 V ± 10 %         |   |   |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
|   | I <sub>OH</sub>       | -1.5 mA              | -3 mA                | -4 mA                |   |   |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
|   | I <sub>OL</sub>       | 1.5 mA               | 3 mA                 | 4 mA                 |   |   |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
| V <sub>OL</sub>   | -                     | -                    | 10 % V <sub>CC</sub> | V                    |   |   |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
| V <sub>OH</sub>   | V <sub>CC</sub> - 0.4 | -                    | -                    | V                    |   |   |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
| V <sub>OL</sub>   | -                     | -                    | 0.4                  | V                    | Load current condition<br><table border="1"> <tr> <td></td> <td>1.8 V ± 10 %</td> <td>2.5 V ± 10 %</td> <td>3.3 V ± 10 %</td> </tr> <tr> <td>I<sub>OH</sub></td> <td>-1.5 mA</td> <td>-3 mA</td> <td>-4 mA</td> </tr> <tr> <td>I<sub>OL</sub></td> <td>1.5 mA</td> <td>3 mA</td> <td>4 mA</td> </tr> </table> |   | 1.8 V ± 10 % | 2.5 V ± 10 % | 3.3 V ± 10 % | I <sub>OH</sub> | -1.5 mA         | -3 mA   | -4 mA | I <sub>OL</sub> | 1.5 mA          | 3 mA   | 4 mA |      |
|   | 1.8 V ± 10 %          | 2.5 V ± 10 %         | 3.3 V ± 10 %         |                      |   |   |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
| I <sub>OH</sub>   | -1.5 mA               | -3 mA                | -4 mA                |                      |   |   |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
| I <sub>OL</sub>   | 1.5 mA                | 3 mA                 | 4 mA                 |                      |   |   |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
| Symmetry  | SYM                   | 45                   | 50                   | 55                   | %   | 50 % V <sub>CC</sub> level,<br>L_CMOS ≤ 15 pF   |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
| Rise time / Fall time   | tr / tf               | -                    | -                    | 3                    | ns  | V <sub>CC</sub> = 2.5 V or 3.3 V ± 10 %, 20 % V <sub>CC</sub> to 80 % V <sub>CC</sub> Level, L_CMOS = 15 pF   |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
|   |                       | -                    | -                    | 3.5                  | ns  | V <sub>CC</sub> = 1.8 V ± 10 % or ± 5 %, 20 % V <sub>CC</sub> to 80 % V <sub>CC</sub> Level, L_CMOS = 15 pF   |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
| Input voltage   | V <sub>IH</sub>       | 80 % V <sub>CC</sub> | -                    | -                    | V   | $\overline{ST}$ terminal  |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
|   | V <sub>IL</sub>       | -                    | -                    | 20 % V <sub>CC</sub> | V   |   |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
| Output disable time (ST)  | tstp_st               | -                    | -                    | 100                  | ns  | $\overline{ST}$ terminal HIGH → LOW   |              |              |              |                 |                 |         |       |                 |                 |        |      |      |
| Output enable time (ST)   | tsta_st               | -                    | -                    | 3                    | ms  | $\overline{ST}$ terminal LOW → HIGH   |              |              |              |                 |                 |         |       |                 |                 |        |      |      |

## [ 6 ] Thermal resistance (For reference only)

| Parameter            | Symbol          | Specification |      |      | Unit | Conditions |
|----------------------|-----------------|---------------|------|------|------|------------|
|                      |                 | Min.          | Typ. | Max. |      |            |
| Junction temperature | T <sub>j</sub>  | -             | -    | +125 | °C   |            |
| Junction to case     | θ <sub>jc</sub> | -             | 10   | -    | °C/W | SG2016CAN  |
|                      |                 | -             | 15   | -    | °C/W | SG-210STF  |
|                      |                 | -             | 28   | -    | °C/W | SG3225CAN  |
|                      |                 | -             | 16   | -    | °C/W | SG5032CAN  |
|                      |                 | -             | 23   | -    | °C/W | SG7050CAN  |
| Junction to ambient  | θ <sub>ja</sub> | -             | 100  | -    | °C/W | SG2016CAN  |
|                      |                 | -             | 92   | -    | °C/W | SG-210STF  |
|                      |                 | -             | 79   | -    | °C/W | SG3225CAN  |
|                      |                 | -             | 82   | -    | °C/W | SG5032CAN  |
|                      |                 | -             | 104  | -    | °C/W | SG7050CAN  |


## [ 7 ] Typical Performance Characteristics (For reference only)

The following data shows typical performance characteristics


## (7-1) Frequency / Temperature Characteristics

 $f_0 = 25 \text{ MHz}$ ,  $\pm 25 \times 10^{-6}$  at  $-20$  to  $+70$  °C

n = 50 pcs

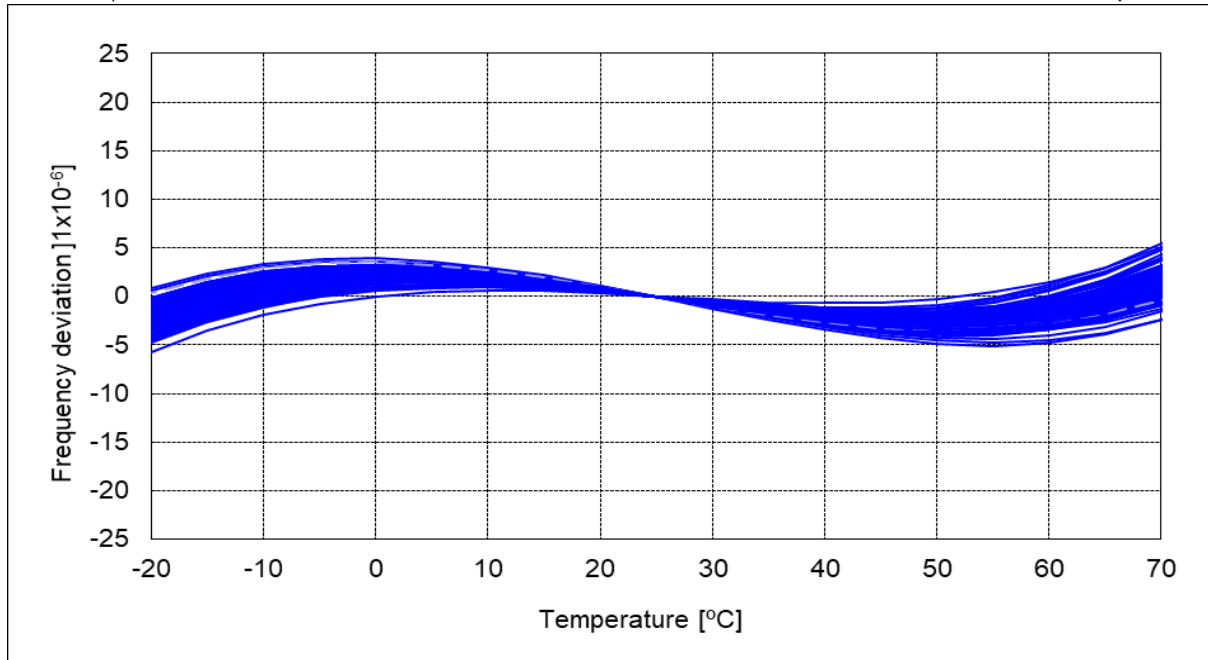
 $f_0 = 25 \text{ MHz}$ ,  $\pm 50 \times 10^{-6}$  at  $-40$  to  $+85$  °C/ $+105$  °C

n = 50 pcs

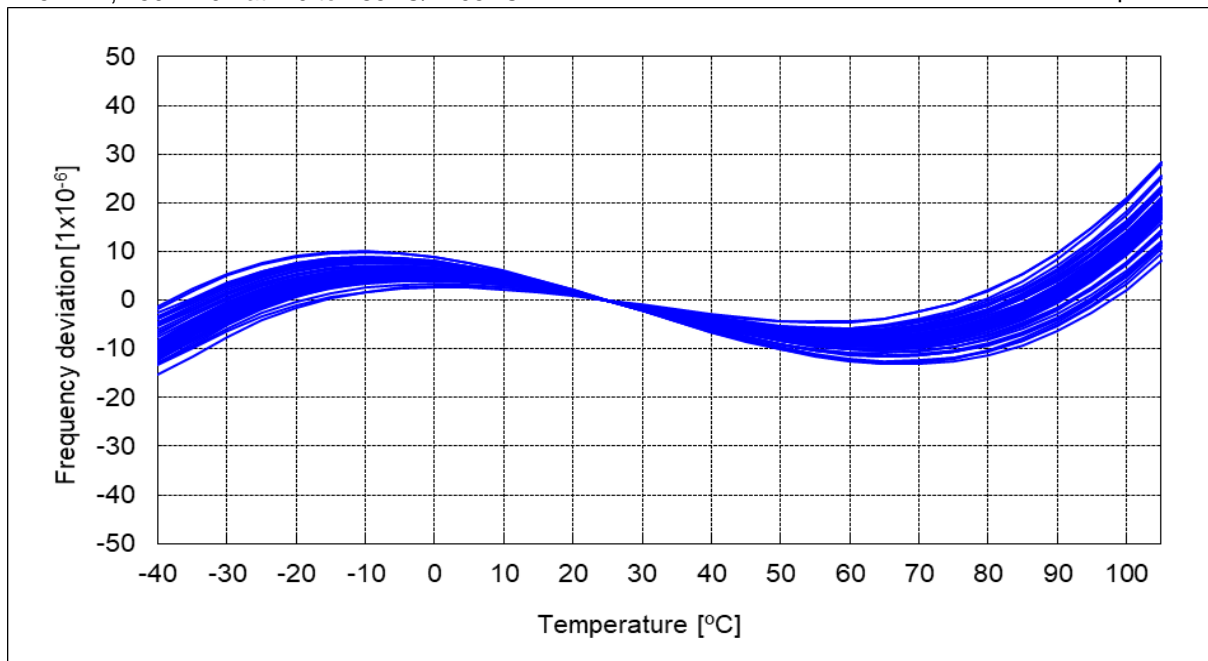


(7-2) Current Consumption

No load,  $T_{use} = +25\text{ }^{\circ}\text{C}$ , Freq. Dependency

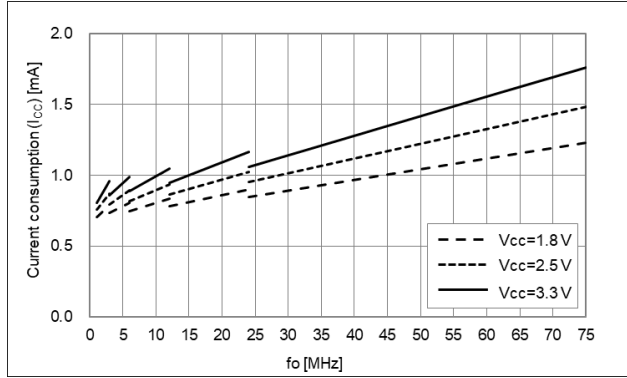


$L_{CMOS} = 15\text{ pF}$ ,  $T_{use} = +25\text{ }^{\circ}\text{C}$ , Freq. Dependency

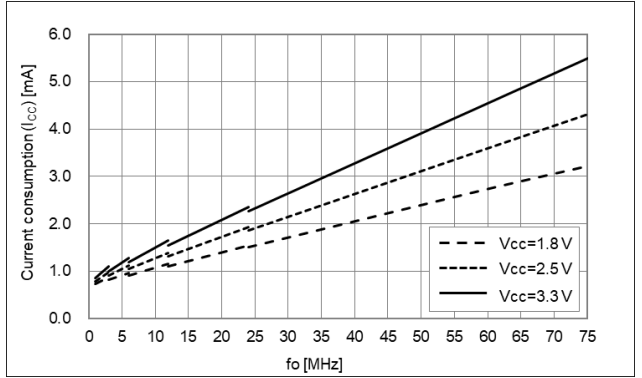


$f_o = 20\text{ MHz}$

$L_{CMOS} = 5\text{ pF}$ , Temperature Characteristic

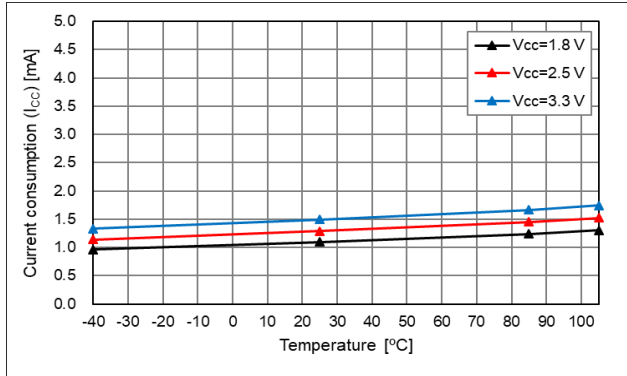


$T_{use} = +25\text{ }^{\circ}\text{C}$ , Output load( $L_{CMOS}$ ) Characteristics

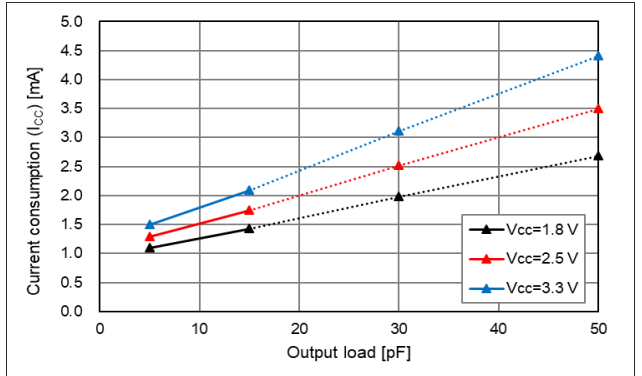


$f_o = 40\text{ MHz}$

$L_{CMOS} = 5\text{ pF}$ , Temperature Characteristic

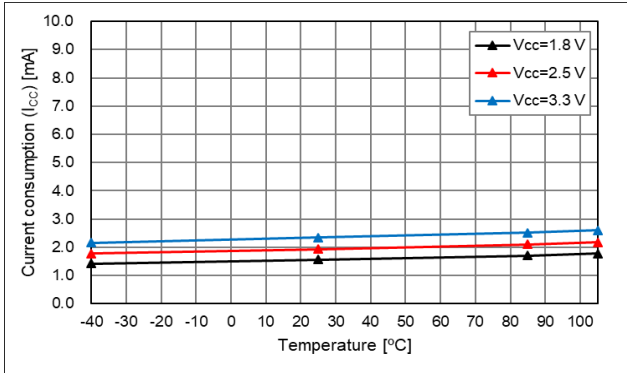


$T_{use} = +25\text{ }^{\circ}\text{C}$ , Output load( $L_{CMOS}$ ) Characteristics

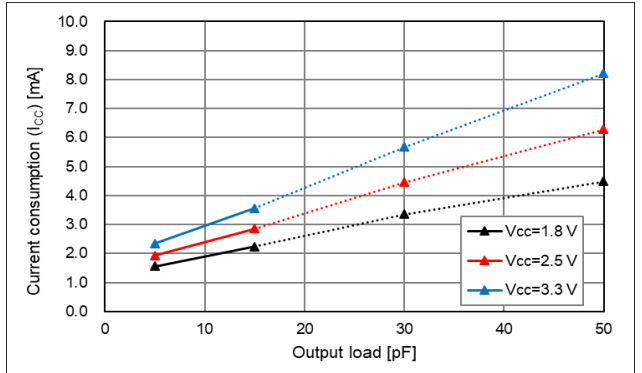


$f_o = 72\text{ MHz}$

$L_{CMOS} = 5\text{ pF}$ , Temperature Characteristic

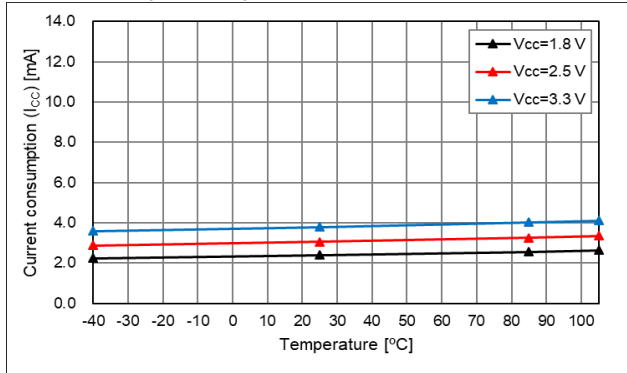

$T_{use} = +25\text{ }^{\circ}\text{C}$ , Output load( $L_{CMOS}$ ) Characteristics

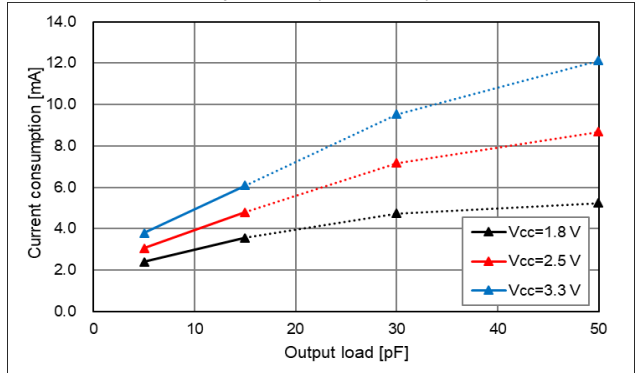


\* Output load condition under  $L_{CMOS} > 15\text{ pF}$  (dotted line area) is not guaranteed, and the data is for reference.

The actual current consumption is the total of the current under the condition of no load and the current to drive the output load ( $f_o \times L_{CMOS} \times V_{CC}$ ). To reduce the current consumption, it is effective to use lower frequency, lower supply voltage and lower output load.


(7-3) Rise Time / Fall Time

fo = 20 MHz, Rise Time


20% - 80% V<sub>CC</sub>, L<sub>CMOS</sub> = 15 pF, Temp. Char.

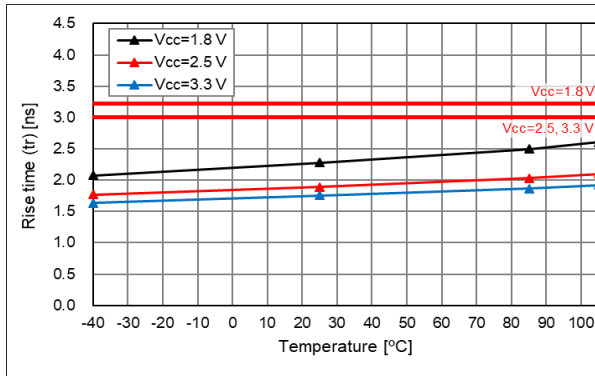


20% - 80% V<sub>CC</sub>, T<sub>use</sub> = +25 °C, Output load Char.

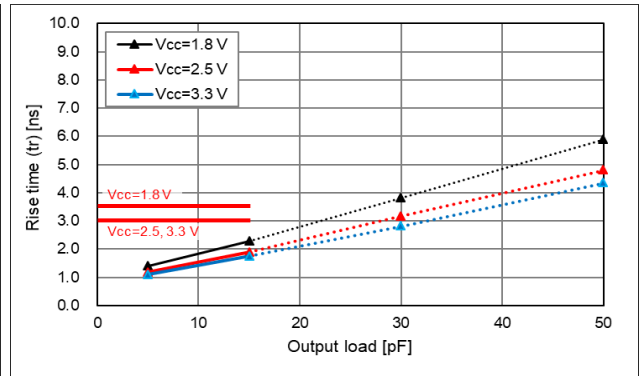

10% - 90% V<sub>CC</sub>, L<sub>CMOS</sub> = 15 pF, Temp. Char.

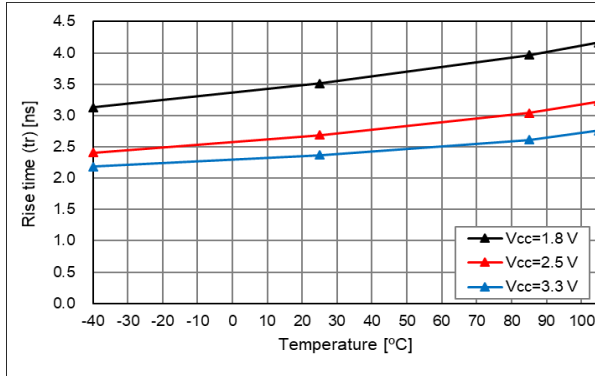


10% - 90% V<sub>CC</sub>, T<sub>use</sub> = +25 °C, Output load Char.

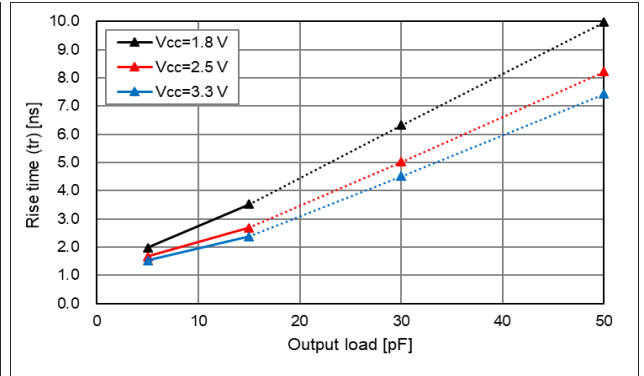


\* Output load condition under L<sub>CMOS</sub> > 15 pF (dotted line area) is not guaranteed, and the data is for reference.

fo = 20 MHz, Fall Time


20% - 80% V<sub>CC</sub>, L<sub>CMOS</sub> = 15 pF, Temp. Char.

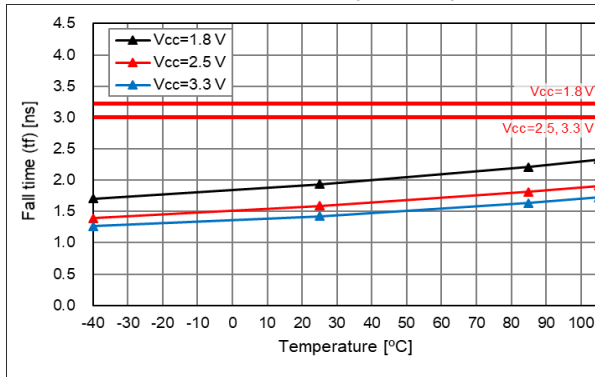


20% - 80% V<sub>CC</sub>, T<sub>use</sub> = +25 °C, Output load Char.

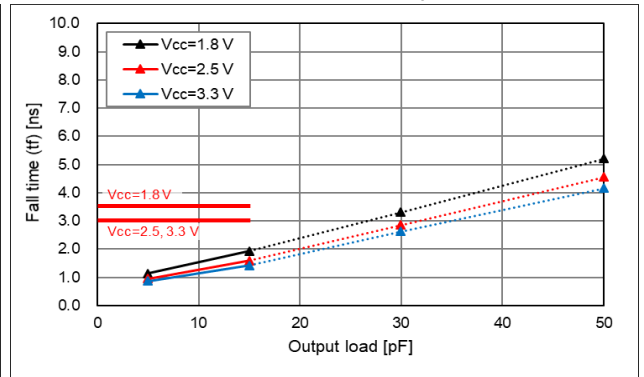

10% - 90% V<sub>CC</sub>, L<sub>CMOS</sub> = 15 pF, Temp. Char.

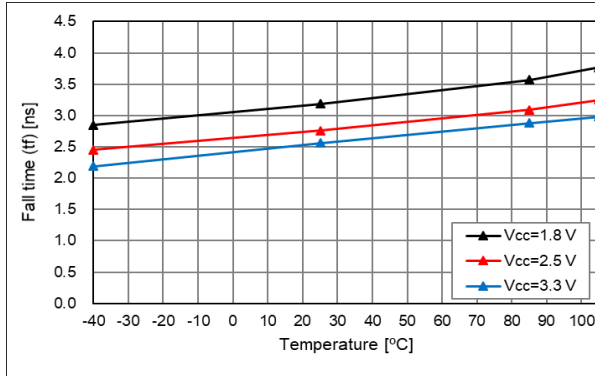

10% - 90% V<sub>CC</sub>, T<sub>use</sub> = +25 °C, Output load Char.

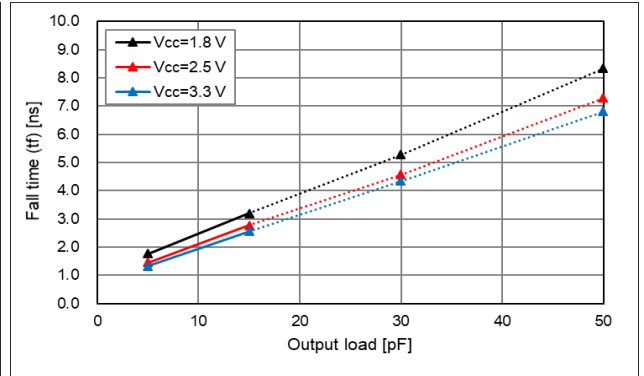


\* Output load condition under L<sub>CMOS</sub> > 15 pF (dotted line area) is not guaranteed, and the data is for reference.


(7-3) Rise Time / Fall Time [cont'd]

fo = 40 MHz, Rise Time


20% - 80% V<sub>CC</sub>, L<sub>CMOS</sub> = 15 pF, Temp. Char.

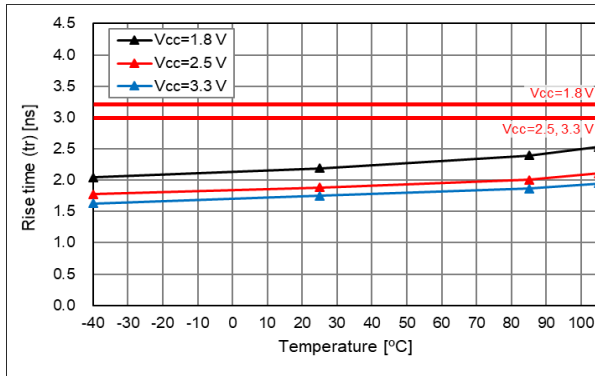


20% - 80% V<sub>CC</sub>, T<sub>use</sub> = +25 °C, Output load Char.

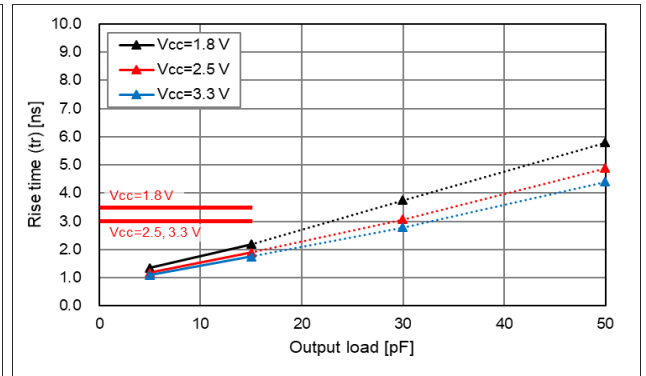

10% - 90% V<sub>CC</sub>, L<sub>CMOS</sub> = 15 pF, Temp. Char.

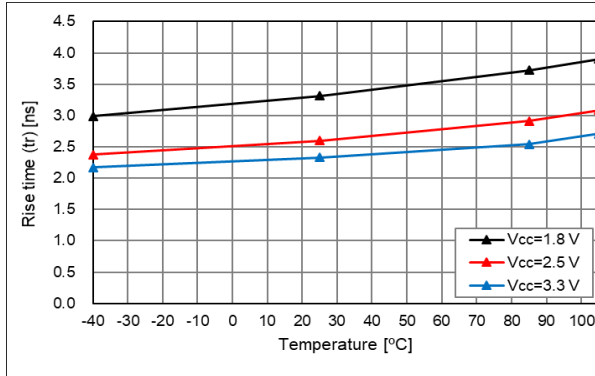


10% - 90% V<sub>CC</sub>, T<sub>use</sub> = +25 °C, Output load Char.

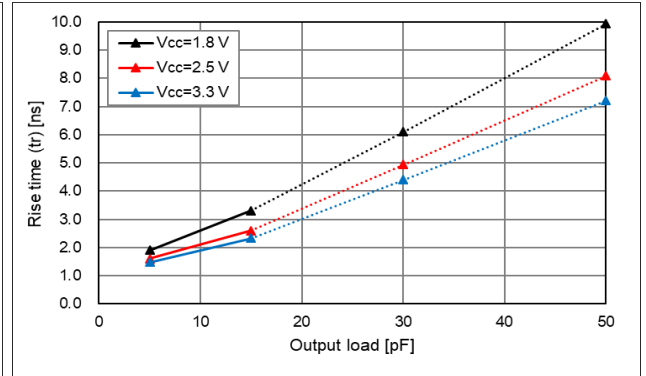


\* Output load condition under L<sub>CMOS</sub> > 15 pF (dotted line area) is not guaranteed, and the data is for reference.

fo = 40 MHz, Fall Time


20% - 80% V<sub>CC</sub>, L<sub>CMOS</sub> = 15 pF, Temp. Char.

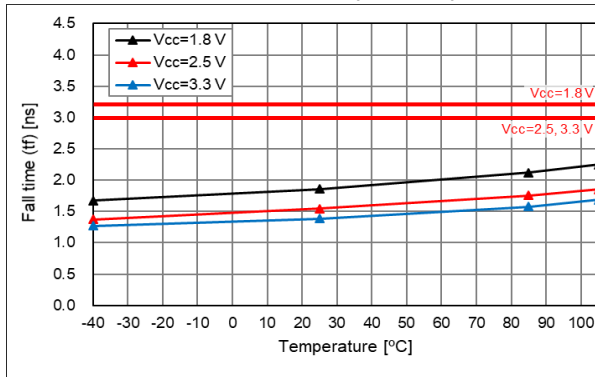


20% - 80% V<sub>CC</sub>, T<sub>use</sub> = +25 °C, Output load Char.

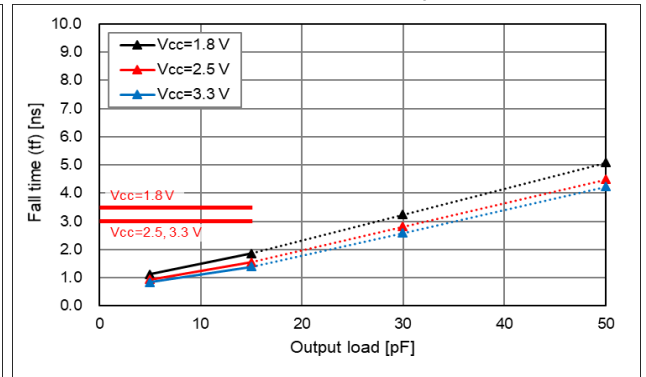

10% - 90% V<sub>CC</sub>, L<sub>CMOS</sub> = 15 pF, Temp. Char.

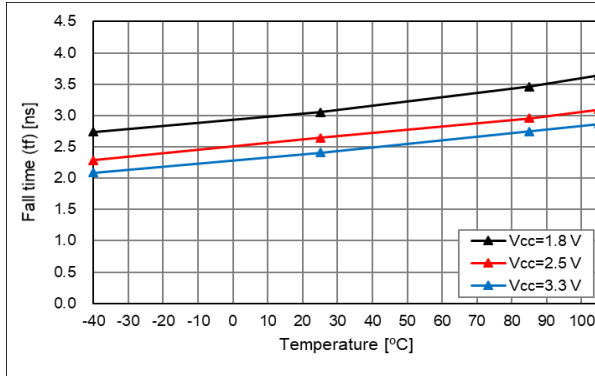

10% - 90% V<sub>CC</sub>, T<sub>use</sub> = +25 °C, Output load Char.

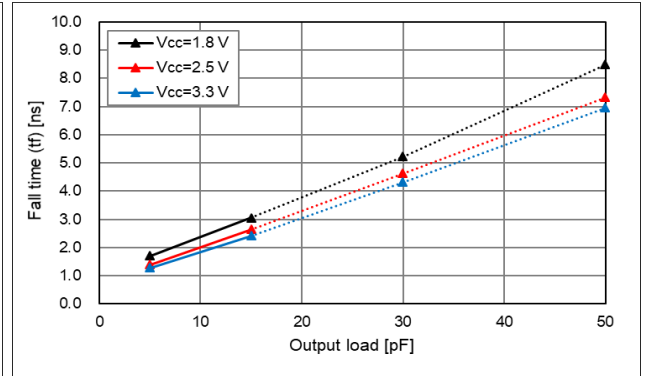


\* Output load condition under L<sub>CMOS</sub> > 15 pF (dotted line area) is not guaranteed, and the data is for reference.


(7-3) Rise Time / Fall Time [cont'd]

fo = 72 MHz, Rise Time


20% - 80% V<sub>CC</sub>, L<sub>CMOS</sub> = 15 pF, Temp. Char.

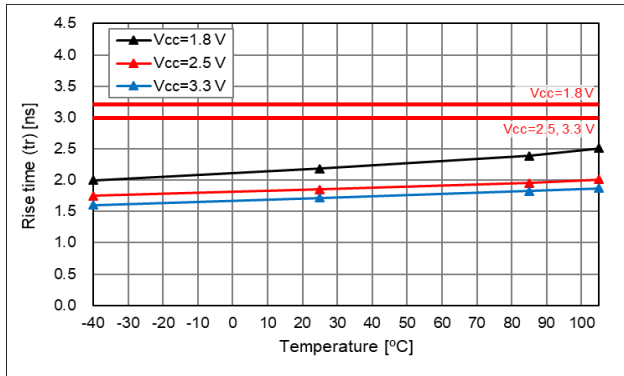


20% - 80% V<sub>CC</sub>, T<sub>use</sub> = +25 °C, Output load Char.

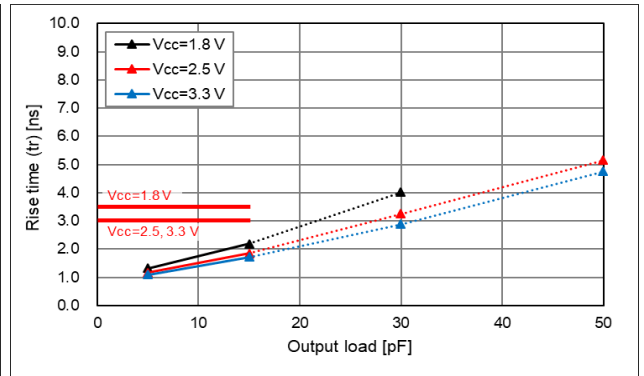

10% - 90% V<sub>CC</sub>, L<sub>CMOS</sub> = 15 pF, Temp. Char.

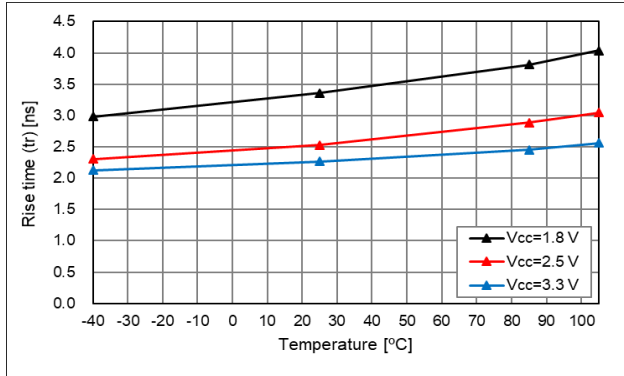


10% - 90% V<sub>CC</sub>, T<sub>use</sub> = +25 °C, Output load Char.

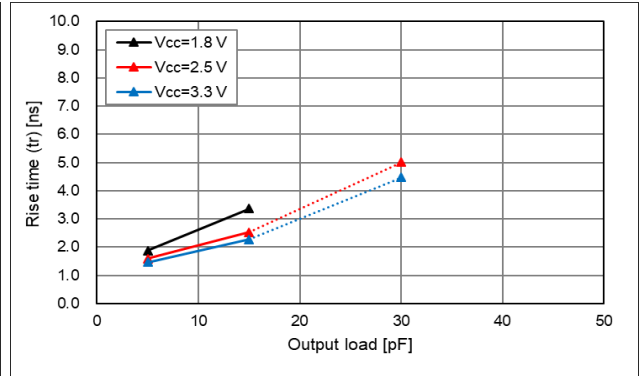


\* Output load condition under L<sub>CMOS</sub> > 15 pF (dotted line area) is not guaranteed, and the data is for reference. There are some missing data in the graph. It is unmeasurable because of low amplitude under the condition of L<sub>CMOS</sub> > 15 pF.

fo = 72 MHz, Fall Time


20% - 80% V<sub>CC</sub>, L<sub>CMOS</sub> = 15 pF, Temp. Char.

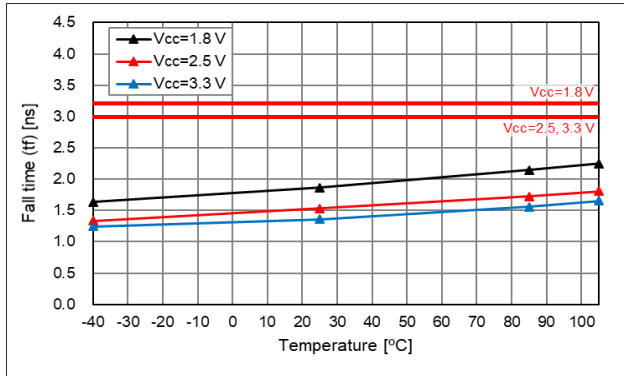


20% - 80% V<sub>CC</sub>, T<sub>use</sub> = +25 °C, Output load Char.

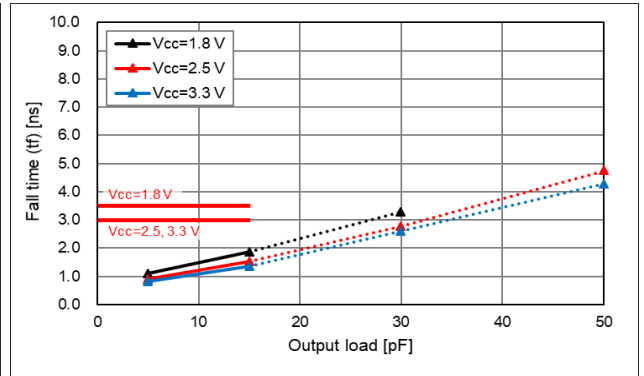

10% - 90% V<sub>CC</sub>, L<sub>CMOS</sub> = 15 pF, Temp. Char.

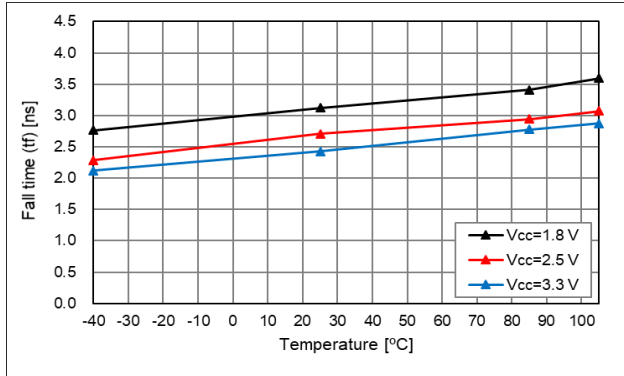


10% - 90% V<sub>CC</sub>, T<sub>use</sub> = +25 °C, Output load Char.

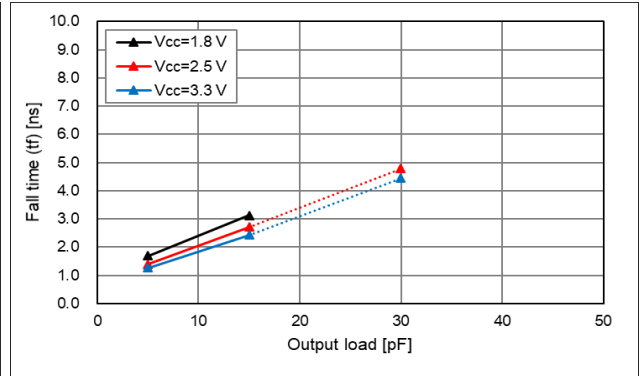


\* Output load condition under L<sub>CMOS</sub> > 15 pF (dotted line area) is not guaranteed, and the data is for reference. There are some missing data in the graph. It is unmeasurable because of low amplitude under the condition of L<sub>CMOS</sub> > 15 pF.

## (7-4) Symmetry


fo = 20 MHz

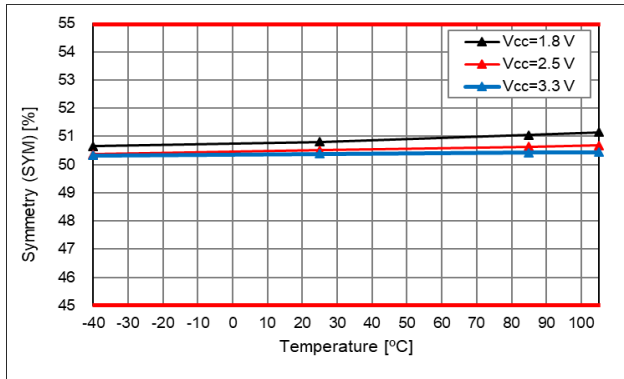50 %V<sub>CC</sub>, L<sub>CMOS</sub> = 15 pF, Temp. Char.

fo = 40 MHz


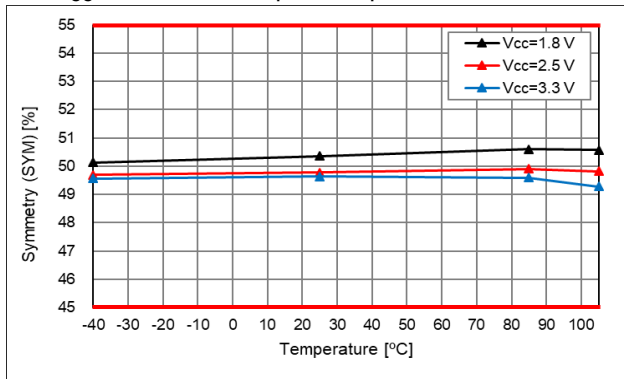
50 %V<sub>CC</sub>, L<sub>CMOS</sub> = 15 pF, Temp. Char.

fo = 72 MHz


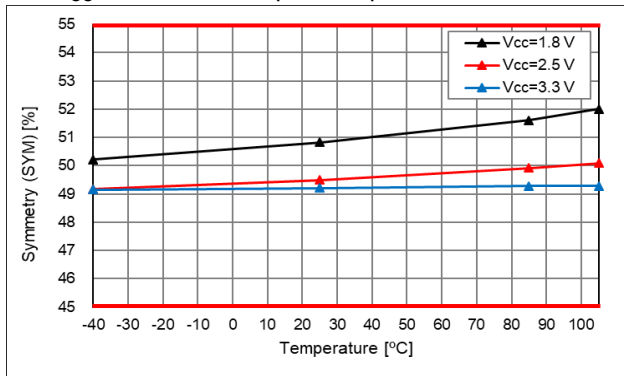
50 %V<sub>CC</sub>, L<sub>CMOS</sub> = 15 pF, Temp. Char.

## (7-5) Output Voltage



fo = 20 MHz

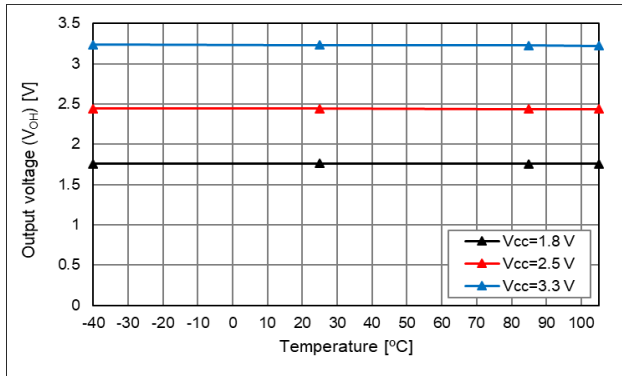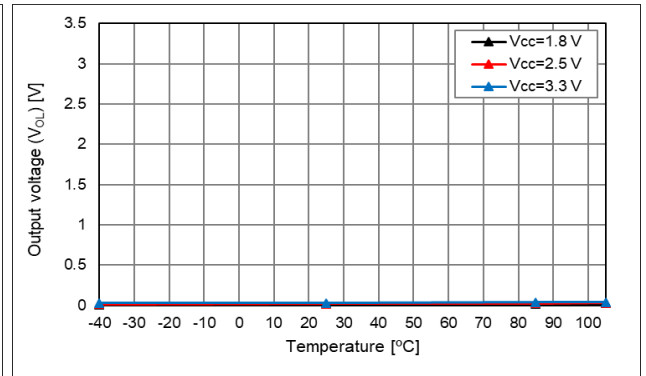V<sub>OH</sub>, L\_CMOS = 15 pF, Temp. Char.V<sub>OL</sub>, L\_CMOS = 15 pF, Temp. Char.

fo = 40 MHz

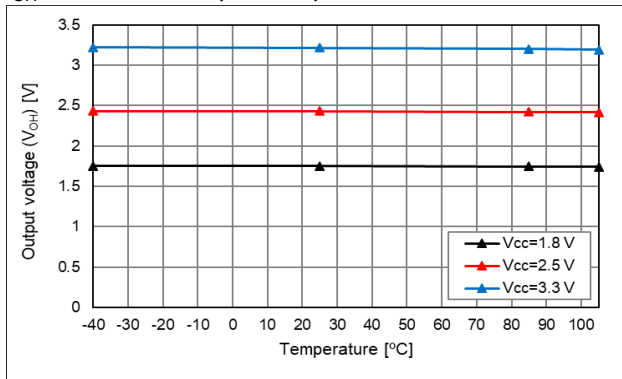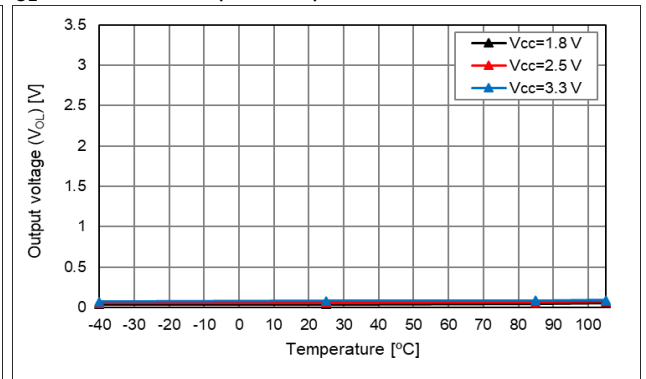V<sub>OH</sub>, L\_CMOS = 15 pF, Temp. Char.V<sub>OL</sub>, L\_CMOS = 15 pF, Temp. Char.

fo = 72 MHz

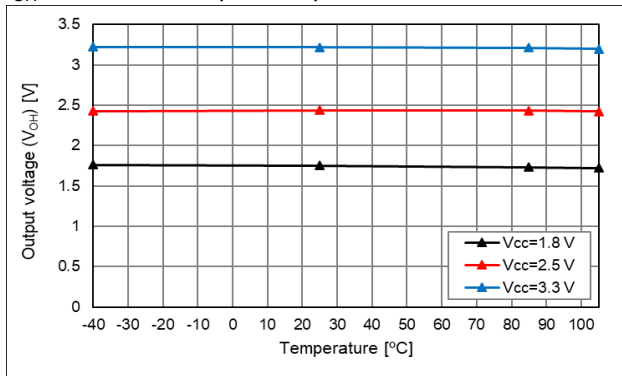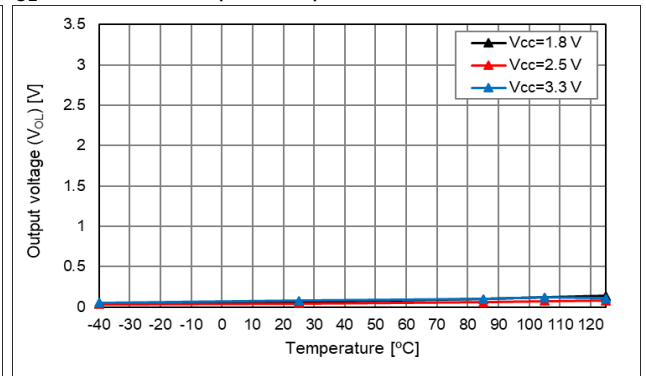
V<sub>OH</sub>, L\_CMOS = 15 pF, Temp. Char.V<sub>OL</sub>, L\_CMOS = 15 pF, Temp. Char.




(7-6) Phase Noise, Phase Jitter, and Jitter

fo = 20 MHz


V<sub>CC</sub> = 3.3 V, T<sub>use</sub> = +25 °C

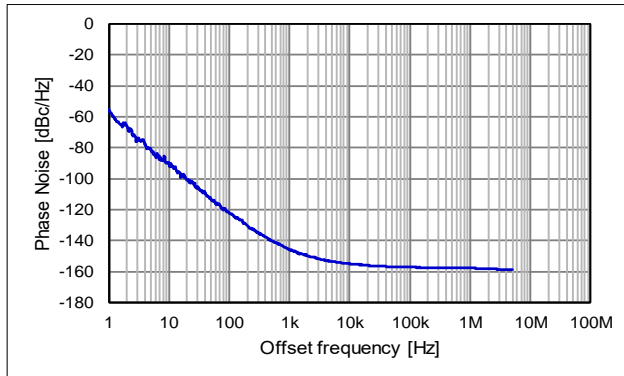

V<sub>CC</sub> = 2.5 V, T<sub>use</sub> = +25 °C

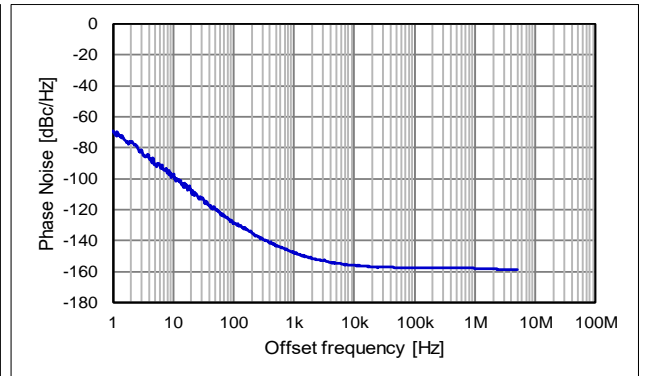

V<sub>CC</sub> = 1.8 V, T<sub>use</sub> = +25 °C

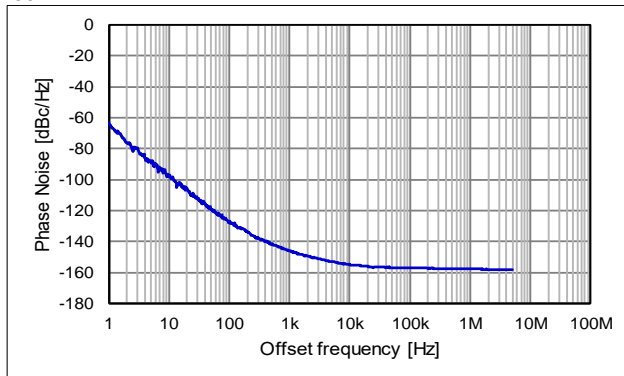

Phase Jitter (Offset frequency: 12 kHz to 5 MHz)


| V <sub>CC</sub> | Phase Jitter |
|-----------------|--------------|
| 3.3 V           | 0.31 ps      |
| 2.5 V           | 0.31 ps      |
| 1.8 V           | 0.32 ps      |

Jitter (T<sub>use</sub> = +25 °C, V<sub>CC</sub> = 3.3 V)


|   |         |
|---|---------|
| Total jitter (BER = 10 <sup>-12</sup> ) | 31.3 ps |
| RMS jitter                              | 1.8 ps  |
| Peak to peak jitter                     | 15 ps   |

fo = 40 MHz


V<sub>CC</sub> = 3.3 V, T<sub>use</sub> = +25 °C

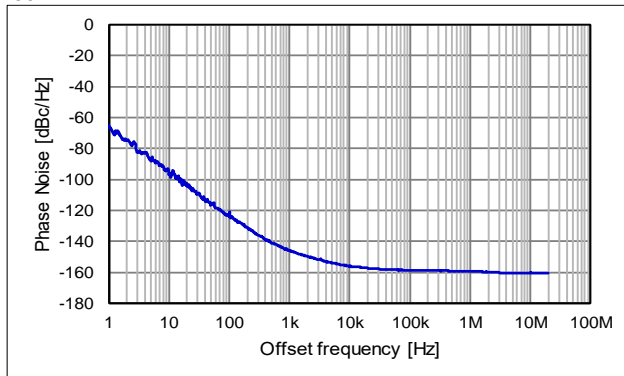

V<sub>CC</sub> = 2.5 V, T<sub>use</sub> = +25 °C

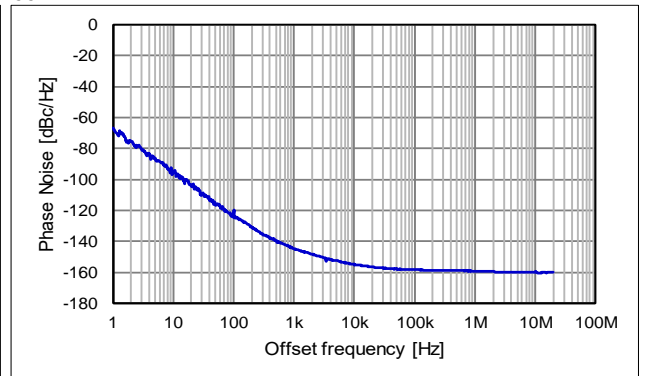

V<sub>CC</sub> = 1.8 V, T<sub>use</sub> = +25 °C

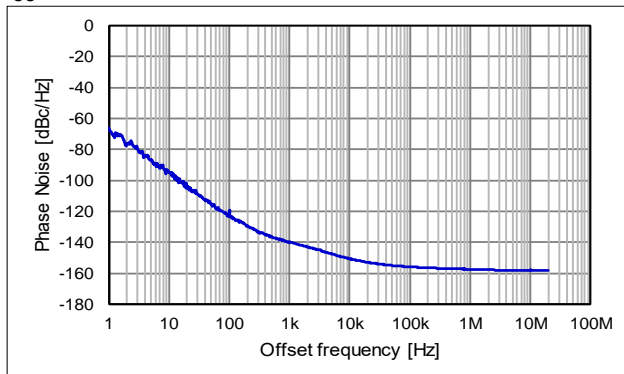

Phase Jitter (Offset frequency: 12 kHz to 20 MHz)

| V <sub>CC</sub> | Phase Jitter |
|-----------------|--------------|
| 3.3 V           | 0.24 ps      |
| 2.5 V           | 0.26 ps      |
| 1.8 V           | 0.32 ps      |


Jitter (T<sub>use</sub> = +25 °C, V<sub>CC</sub> = 3.3 V)

|   |         |
|---|---------|
| Total jitter (BER = 10 <sup>-12</sup> ) | 22.3 ps |
| RMS jitter                              | 1.8 ps  |
| Peak to peak jitter                     | 16 ps   |


(7-6) Phase Noise and Phase Jitter [cont'd]

fo = 72 MHz


V<sub>CC</sub> = 3.3 V, T<sub>use</sub> = +25 °C

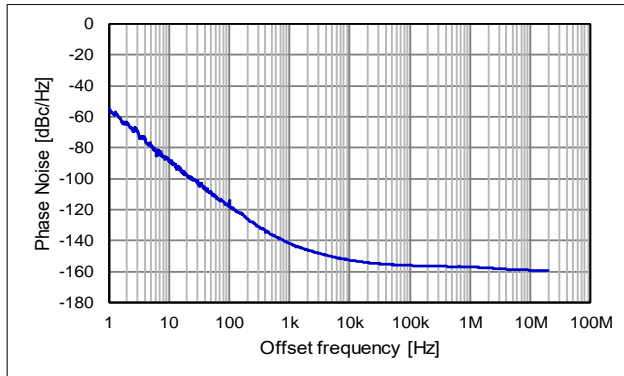

V<sub>CC</sub> = 2.5 V, T<sub>use</sub> = +25 °C

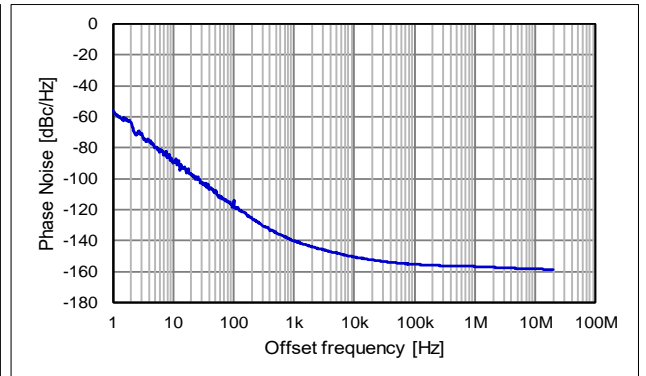

V<sub>CC</sub> = 1.8 V, T<sub>use</sub> = +25 °C

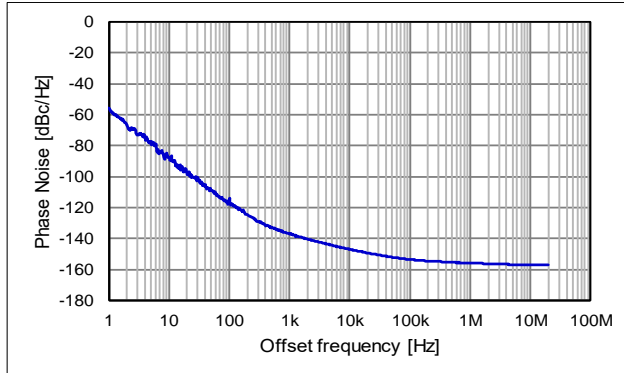







Phase Jitter (Offset frequency: 12 kHz to 20 MHz)

| V <sub>CC</sub> | Phase Jitter |
|-----------------|--------------|
| 3.3 V           | 0.16 ps      |
| 2.5 V           | 0.17 ps      |
| 1.8 V           | 0.20 ps      |




Jitter (T<sub>use</sub> = +25 °C, V<sub>CC</sub> = 3.3 V)

|   |         |
|---|---------|
| Total jitter (BER = 10 <sup>-12</sup> ) | 21.8 ps |
| RMS jitter                              | 1.8 ps  |
| Peak to peak jitter                     | 16 ps   |

## (7-7) Output Waveform

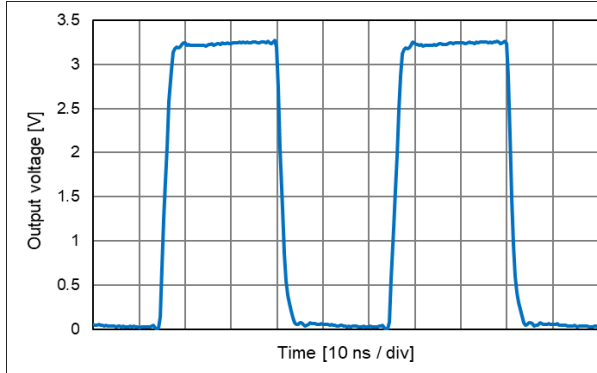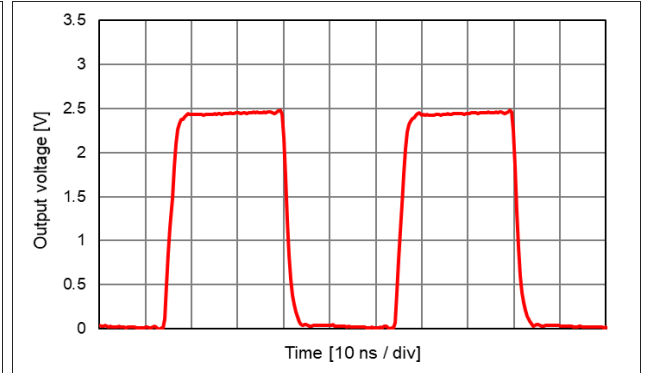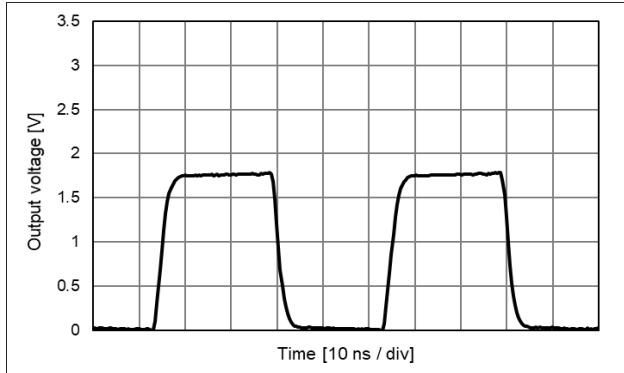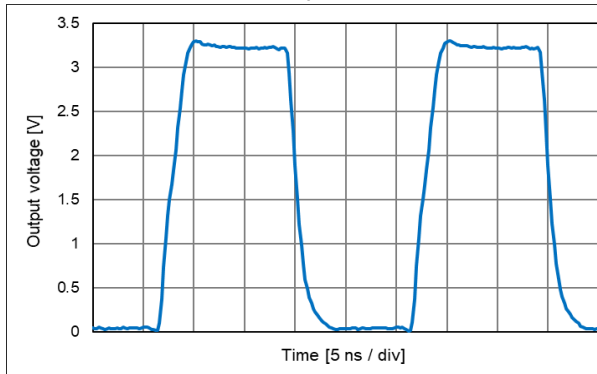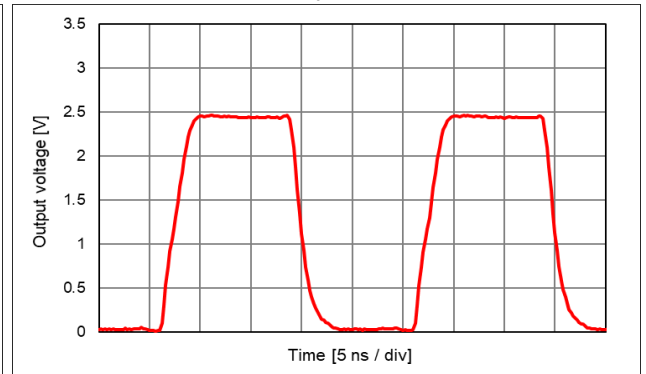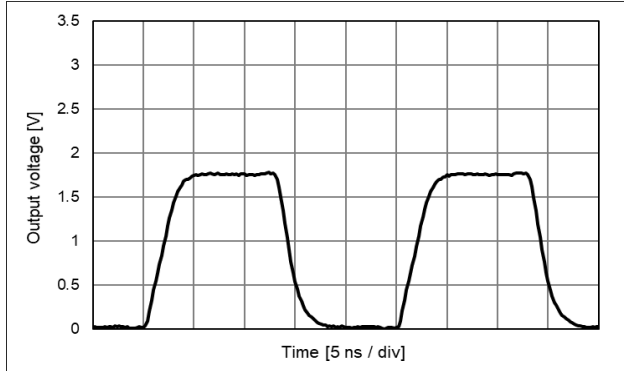
 $f_o = 20 \text{ MHz}$  $V_{CC} = 3.3 \text{ V}$ ,  $L_{CMOS} = 15 \text{ pF}$ ,  $T_{use} = +25 \text{ }^\circ\text{C}$  $V_{CC} = 2.5 \text{ V}$ ,  $L_{CMOS} = 15 \text{ pF}$ ,  $T_{use} = +25 \text{ }^\circ\text{C}$  $V_{CC} = 1.8 \text{ V}$ ,  $L_{CMOS} = 15 \text{ pF}$ ,  $T_{use} = +25 \text{ }^\circ\text{C}$  $f_o = 40 \text{ MHz}$  $V_{CC} = 3.3 \text{ V}$ ,  $L_{CMOS} = 15 \text{ pF}$ ,  $T_{use} = +25 \text{ }^\circ\text{C}$  $V_{CC} = 2.5 \text{ V}$ ,  $L_{CMOS} = 15 \text{ pF}$ ,  $T_{use} = +25 \text{ }^\circ\text{C}$  $V_{CC} = 1.8 \text{ V}$ ,  $L_{CMOS} = 15 \text{ pF}$ ,  $T_{use} = +25 \text{ }^\circ\text{C}$ 

## (7-7) Output Waveform [cont'd]

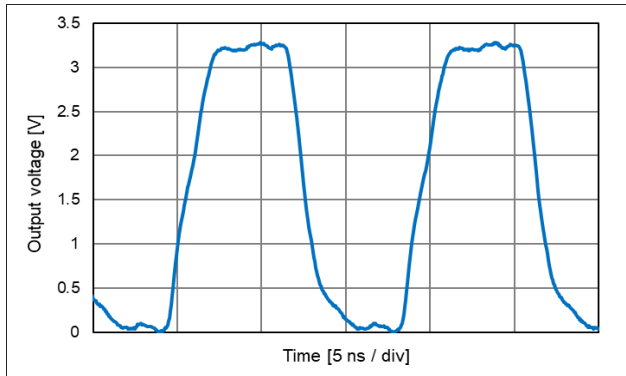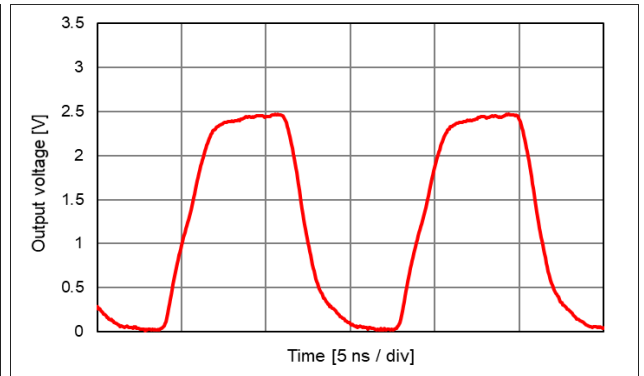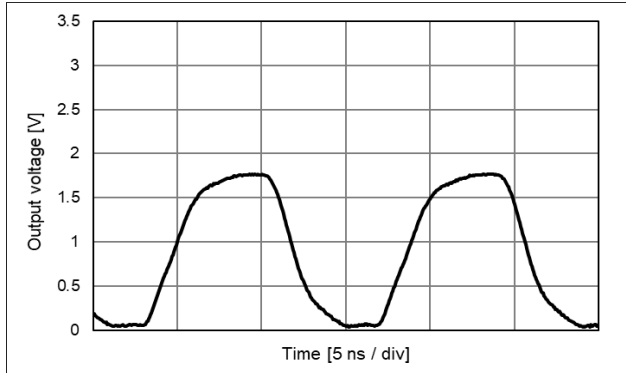
 $f_o = 72 \text{ MHz}$  $V_{CC} = 3.3 \text{ V}$ ,  $L_{CMOS} = 15 \text{ pF}$ ,  $T_{use} = +25 \text{ }^\circ\text{C}$  $V_{CC} = 2.5 \text{ V}$ ,  $L_{CMOS} = 15 \text{ pF}$ ,  $T_{use} = +25 \text{ }^\circ\text{C}$  $V_{CC} = 1.8 \text{ V}$ ,  $L_{CMOS} = 15 \text{ pF}$ ,  $T_{use} = +25 \text{ }^\circ\text{C}$ 

## [ 8 ] Test Circuit

## (8-1) Waveform Observation

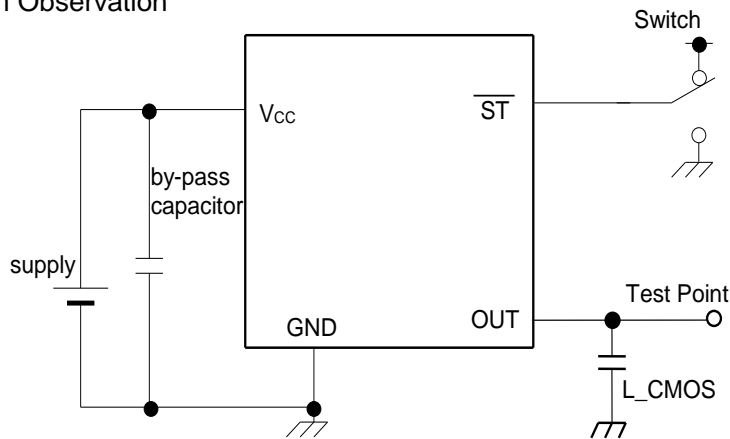

## (8-2) Current Consumption Test

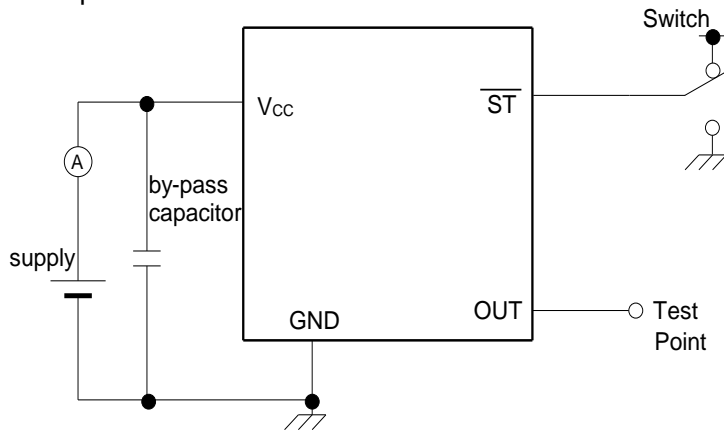

\*Standby current test should be  $\overline{ST} = \text{GND}$ .

## (8-3) Condition

## (1) Oscilloscope

The bandwidth should be minimum 5 times wider than measurement frequency

The probe ground should be placed closely to the test point and the lead length should be as short as possible

\* It is recommended to use miniature socket. (Don't use earth lead.)

(2) L<sub>CMOS</sub> includes probe capacitance.

(3) A 0.01  $\mu\text{F}$  to a 0.1  $\mu\text{F}$  bypass capacitor should be connected between V<sub>CC</sub> and GND pins located close to the device

(4) Use a current meter with a low internal impedance


## (5) Power Supply

Power supply startup time (0 %V<sub>CC</sub> → 90 %V<sub>CC</sub>) should be more than 150  $\mu\text{s}$


Power supply impedance should be as low as possible

(8-4) Timing Chart

(1) Output Waveform and Level

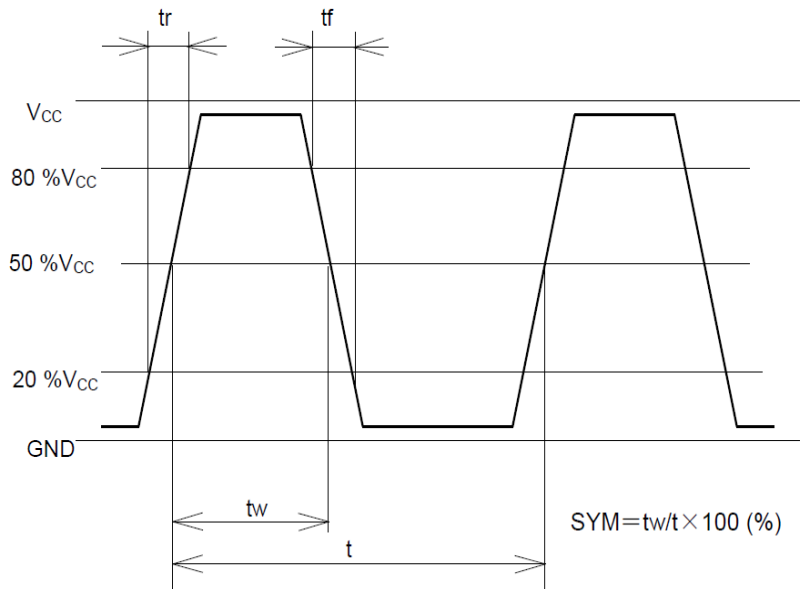


(2) Output Frequency Timing

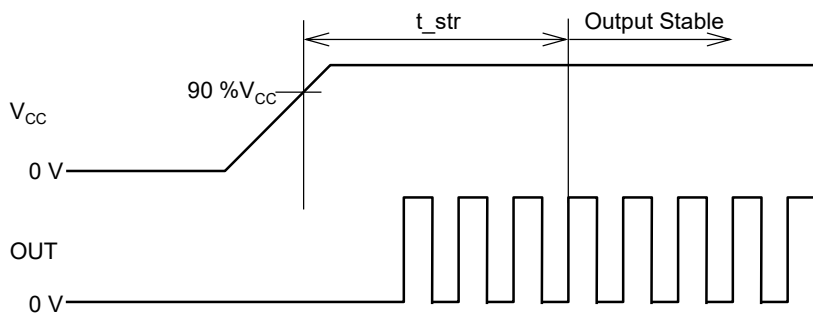

(3)  $\overline{ST}$  Function and Timing

| $\overline{ST}$ Terminal | Osc. circuit     | Output status               |
|--------------------------|------------------|-----------------------------|
| "H" or OPEN              | Oscillation      | Specified frequency: Enable |
| "L"                      | Oscillation stop | High impedance: Disable     |

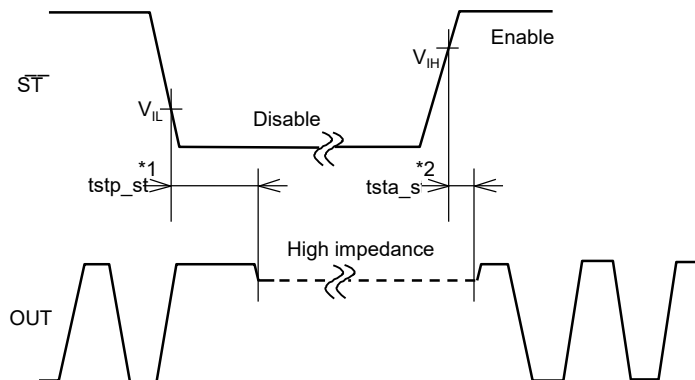

\*1 The period from  $\overline{ST} = V_{IL}$  to  $OUT = High\ impedance\ (Disable)$

\*2 The period from  $\overline{ST} = V_{IH}$  to  $OUT = Enable$


\* Judge of starting output:  $V_{OH} \geq 80\%V_{CC}$ ,  $V_{OL} \leq 20\%V_{CC}$ ,  $f_{out}$  is within  $f_o \pm 1\,000 \times 10^{-6}$

\*  $\overline{ST}$  terminal voltage level should not exceed supply voltage when using  $\overline{ST}$  function.


Please note that  $\overline{ST}$  rise time should not exceed supply voltage rise time at the start-up.

[ 9 ] Outline Drawing and Recommended Footprint  
 (9-1) SG2016CAN

Units: mm

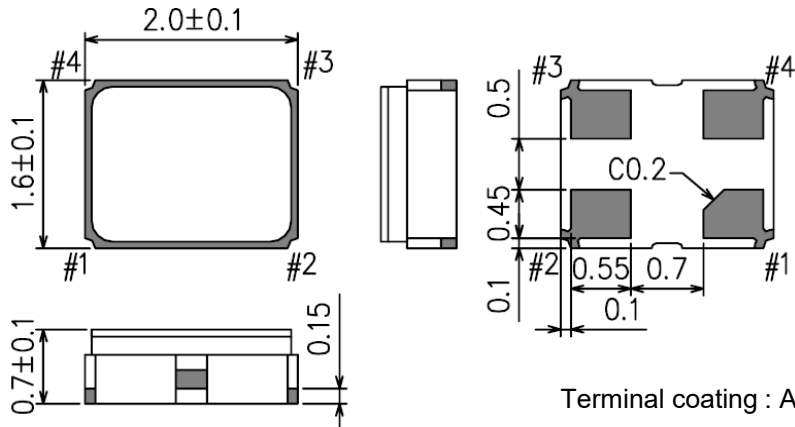

Terminal coating : Au plating

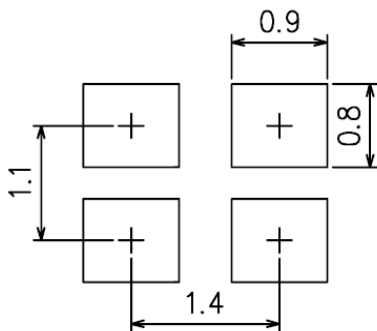


For stable operation, it is recommended that 0.01  $\mu$ F to 0.1  $\mu$ F bypass capacitors should be connected between  $V_{CC}$  and GND and placed as close to the  $V_{CC}$  pin as possible.

Reference Weight Typ.: 9.9 mg

Terminal Assignment



| Pin # | Connection | Function          |                  |                             |
|-------|------------|-------------------|------------------|-----------------------------|
| #1    | ST         | ST terminal       |                  |                             |
|       |            | ST function       | Osc. Circuit     | Output                      |
|       |            | "H" or OPEN       | Oscillation      | Specified frequency: Enable |
|       |            | "L"               | Oscillation stop | High impedance: Disable     |
| #2    | GND        | GND terminal      |                  |                             |
| #3    | OUT        | Output terminal   |                  |                             |
| #4    | $V_{CC}$   | $V_{CC}$ terminal |                  |                             |

Marking

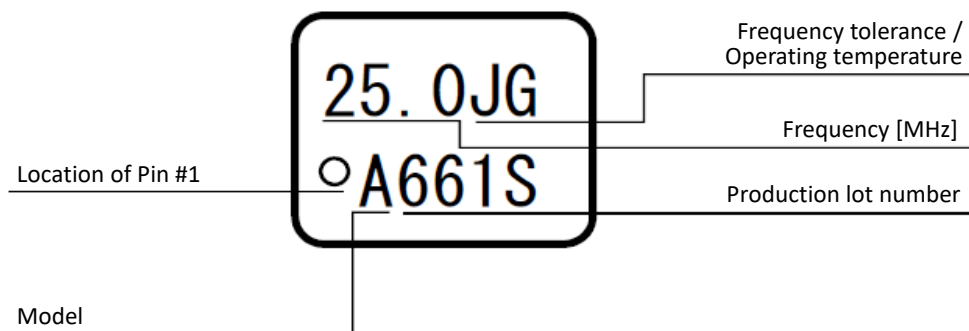

(9-2) SG-210STF

Units: mm

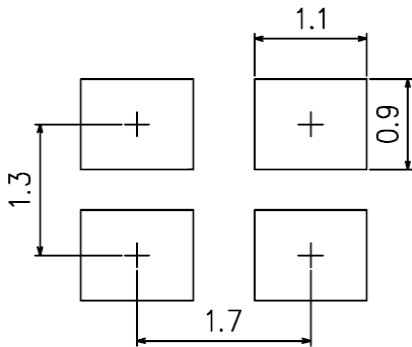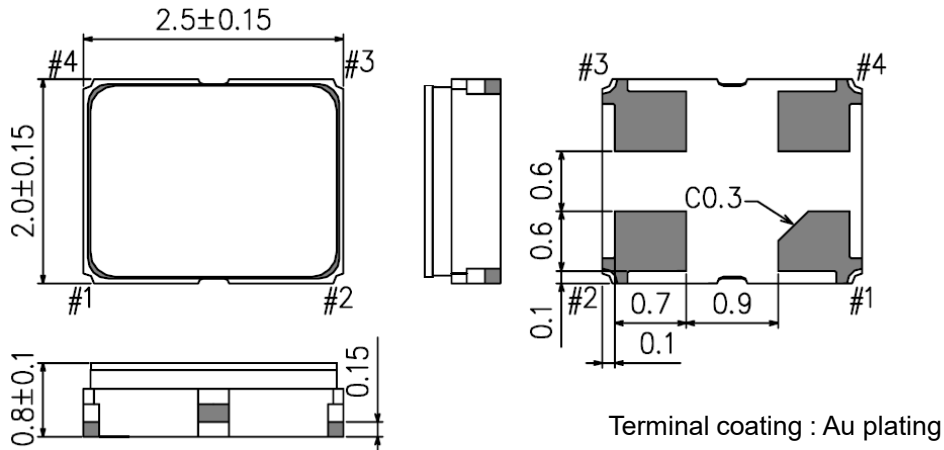


For stable operation, it is recommended that 0.01  $\mu$ F to 0.1  $\mu$ F bypass capacitors should be connected between  $V_{CC}$  and GND and placed as close to the  $V_{CC}$  pin as possible.

Reference Weight Typ.: 14 mg

Terminal Assignment

| Pin # | Connection | Function          |                  |                             |
|-------|------------|-------------------|------------------|-----------------------------|
| #1    | ST         | ST terminal       |                  |                             |
|       |            | ST function       | Osc. Circuit     | Output                      |
|       |            | "H" or OPEN       | Oscillation      | Specified frequency: Enable |
|       |            | "L"               | Oscillation stop | High impedance: Disable     |
| #2    | GND        | GND terminal      |                  |                             |
| #3    | OUT        | Output terminal   |                  |                             |
| #4    | $V_{CC}$   | $V_{CC}$ terminal |                  |                             |



Marking

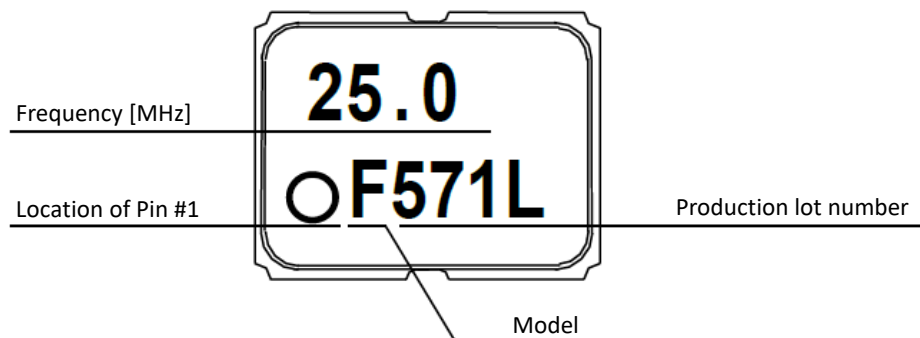



(9-3) SG3225CAN

Units: mm

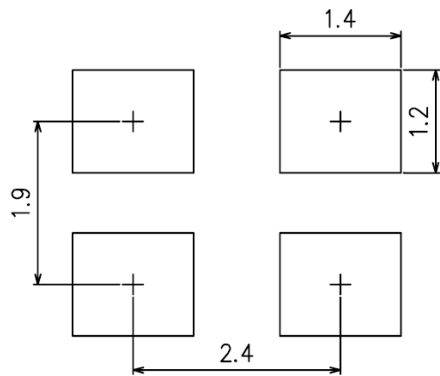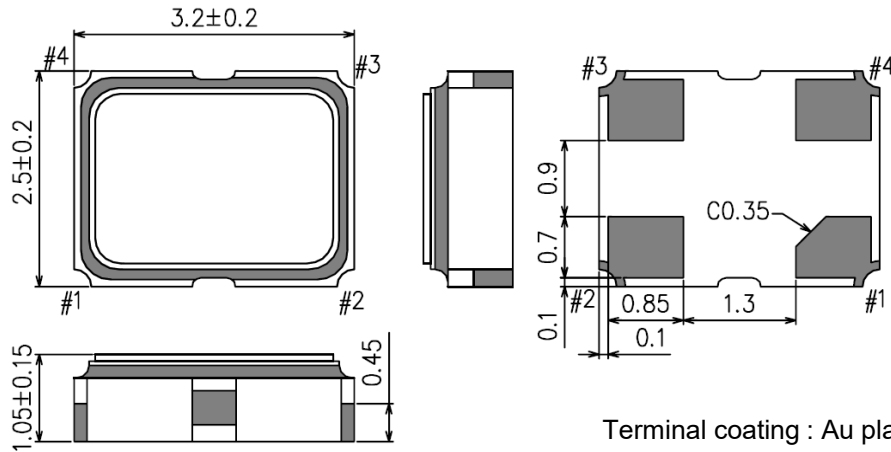


For stable operation, it is recommended that 0.01  $\mu$ F to 0.1  $\mu$ F bypass capacitors should be connected between  $V_{CC}$  and GND and placed as close to the  $V_{CC}$  pin as possible.

Reference Weight Typ.: 25 mg

Terminal Assignment


| Pin # | Connection | Function          |                  |                             |
|-------|------------|-------------------|------------------|-----------------------------|
| #1    | ST         | ST terminal       |                  |                             |
|       |            | ST function       | Osc. Circuit     | Output                      |
|       |            | "H" or OPEN       | Oscillation      | Specified frequency: Enable |
|       |            | "L"               | Oscillation stop | High impedance: Disable     |
| #2    | GND        | GND terminal      |                  |                             |
| #3    | OUT        | Output terminal   |                  |                             |
| #4    | $V_{CC}$   | $V_{CC}$ terminal |                  |                             |

Marking

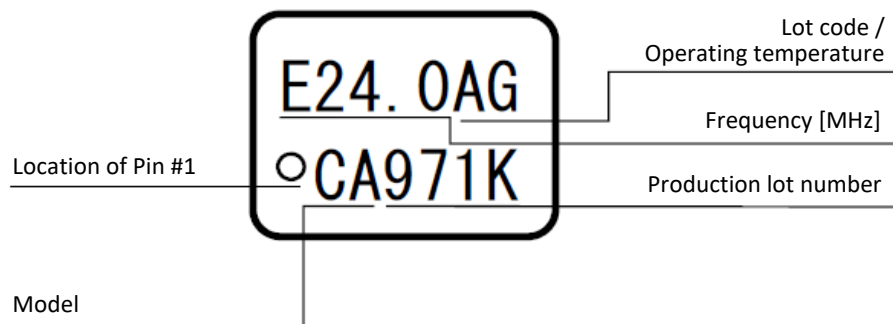

(9-4) SG5032CAN

Units: mm

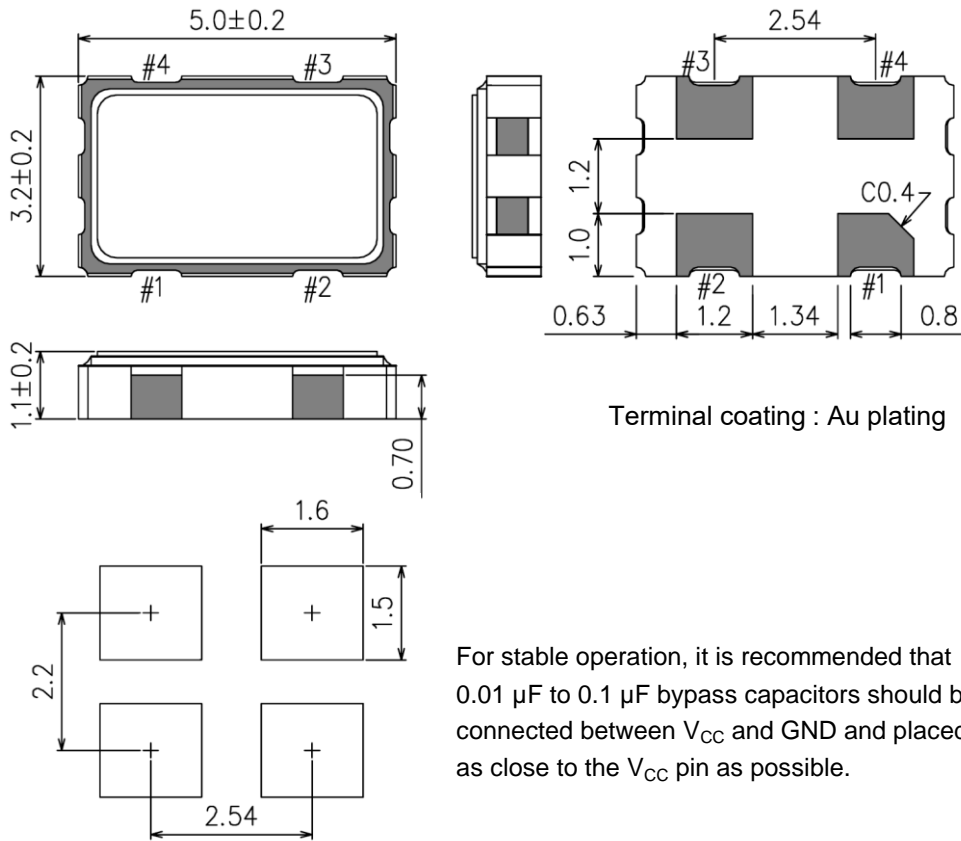


For stable operation, it is recommended that 0.01  $\mu$ F to 0.1  $\mu$ F bypass capacitors should be connected between  $V_{CC}$  and GND and placed as close to the  $V_{CC}$  pin as possible.

Reference Weight Typ.: 52 mg

Terminal Assignment


| Pin # | Connection | Function          |                  |                             |
|-------|------------|-------------------|------------------|-----------------------------|
| #1    | ST         | ST terminal       |                  |                             |
|       |            | ST function       | Osc. Circuit     | Output                      |
|       |            | "H" or OPEN       | Oscillation      | Specified frequency: Enable |
|       |            | "L"               | Oscillation stop | High impedance: Disable     |
| #2    | GND        | GND terminal      |                  |                             |
| #3    | OUT        | Output terminal   |                  |                             |
| #4    | $V_{CC}$   | $V_{CC}$ terminal |                  |                             |

Marking

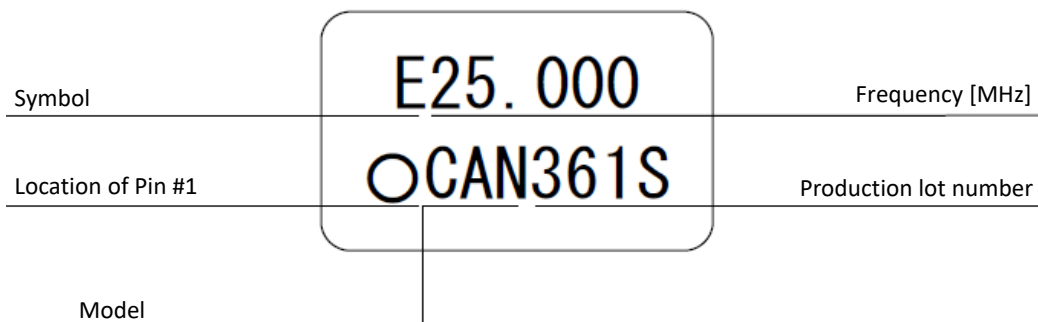

(9-5) SG7050CAN

Units: mm

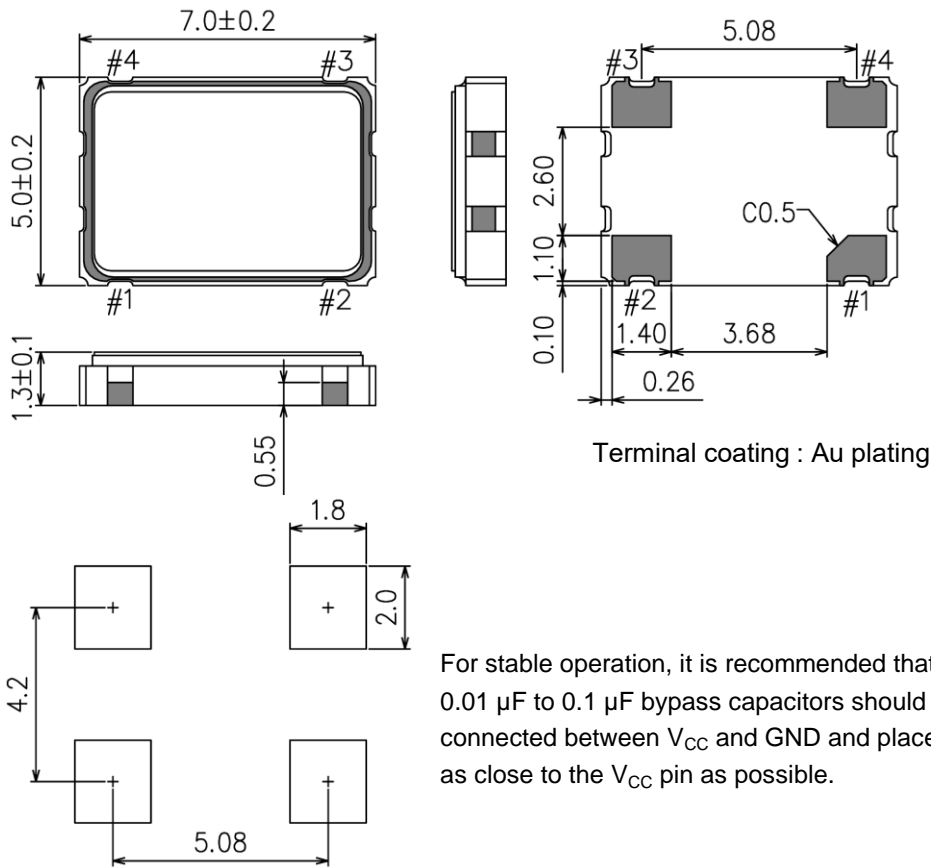


Reference Weight Typ.: 147 mg

Terminal Assignment

| Pin # | Connection      | Function                 |                  |                             |
|-------|-----------------|--------------------------|------------------|-----------------------------|
| #1    | ST              | ST terminal              |                  |                             |
|       |                 | ST function              | Osc. Circuit     | Output                      |
|       |                 | "H" or OPEN              | Oscillation      | Specified frequency: Enable |
|       |                 | "L"                      | Oscillation stop | High impedance: Disable     |
| #2    | GND             | GND terminal             |                  |                             |
| #3    | OUT             | Output terminal          |                  |                             |
| #4    | V <sub>CC</sub> | V <sub>CC</sub> terminal |                  |                             |

Marking

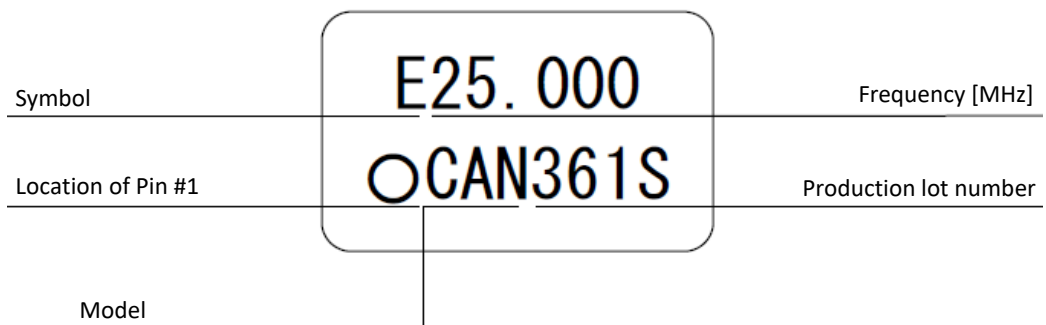

## [ 10 ] Moisture Sensitivity Level and Electro-Static Discharge Ratings

## (10-1) Moisture Sensitivity Level (MSL)

| Parameter | Specification | Conditions             |
|-----------|---------------|------------------------|
| MSL       | LEVEL 1       | IPC/JEDEC J-STD-020D.1 |

## (10-2) Electro-Static Discharge (ESD)


| Parameter | Specification | Conditions   |
|-----------|---------------|--|
| HBM       | 2 000 V Min.  | EIAJ ED-4701-1 C111A, 100 pF, 1.5 k $\Omega$ , 3 times |
| MM        | 200 V Min.    | EIAJ ED-4701-1 C111, 200 pF, 0 $\Omega$ , 1 time       |
| CDM       | 750 V Min     | AEC-Q100-011 (DCDM) * only for SG2016CAN               |

## (10-3) Latch-Up

| Parameter | Specification | Conditions          |
|-----------|---------------|---------------------|
| Latch-up  | 100 mA Min.   | EIAJ ED-4701-1 C113 |

## [ 11 ] Reflow Profiles

IPC/JEDEC J-STD-020D.1

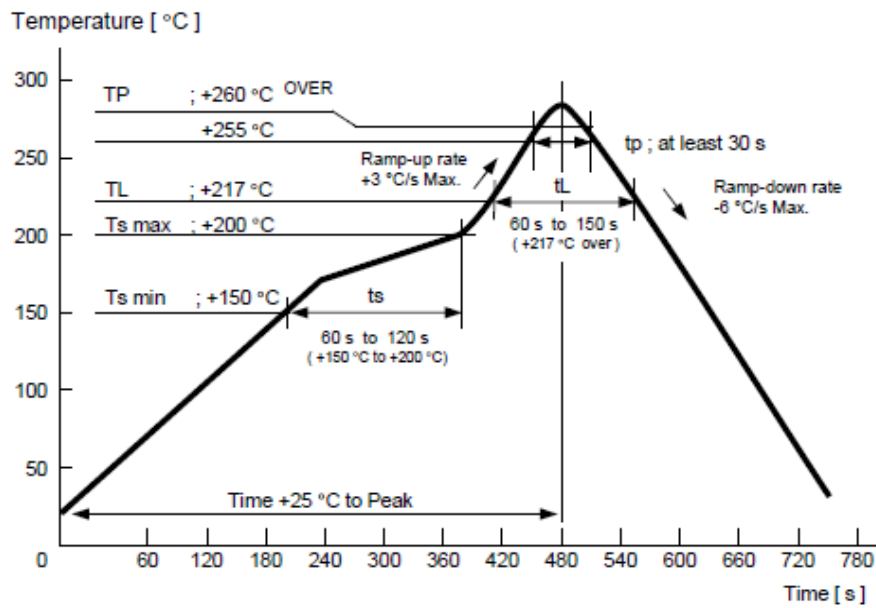

## [ 12 ] Packing Information

## (12-1) SG2016CAN

## (1) Packing Quantity

The last two digits of the Product Number ( X1G004801xxxxxx ) are a code that defines the packing quantity. The standard is "00" for a 3 000 pcs/Reel.

## (2) Taping Specification


Subject to EIA-481, IEC-60286 and JIS C0806

## 1) Tape Dimensions

Carrier Tape Material: PS (Polystyrene)

Top Tape Material: PET (Polyethylene Terephthalate) +PE (Polyethylene)

Units: mm

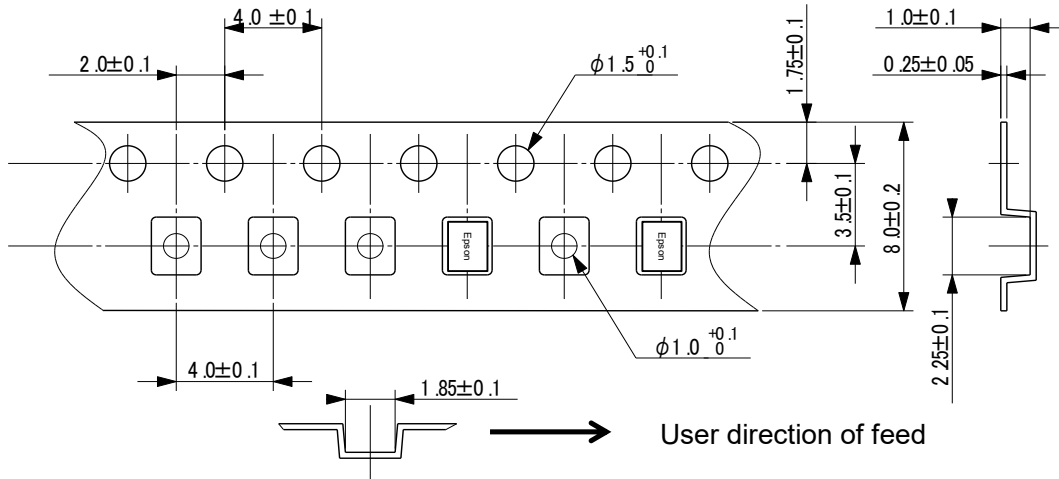


## 2) Reel Dimensions

Center Material: PS (Polystyrene)

Reel Material: PS (Polystyrene)

Units: mm

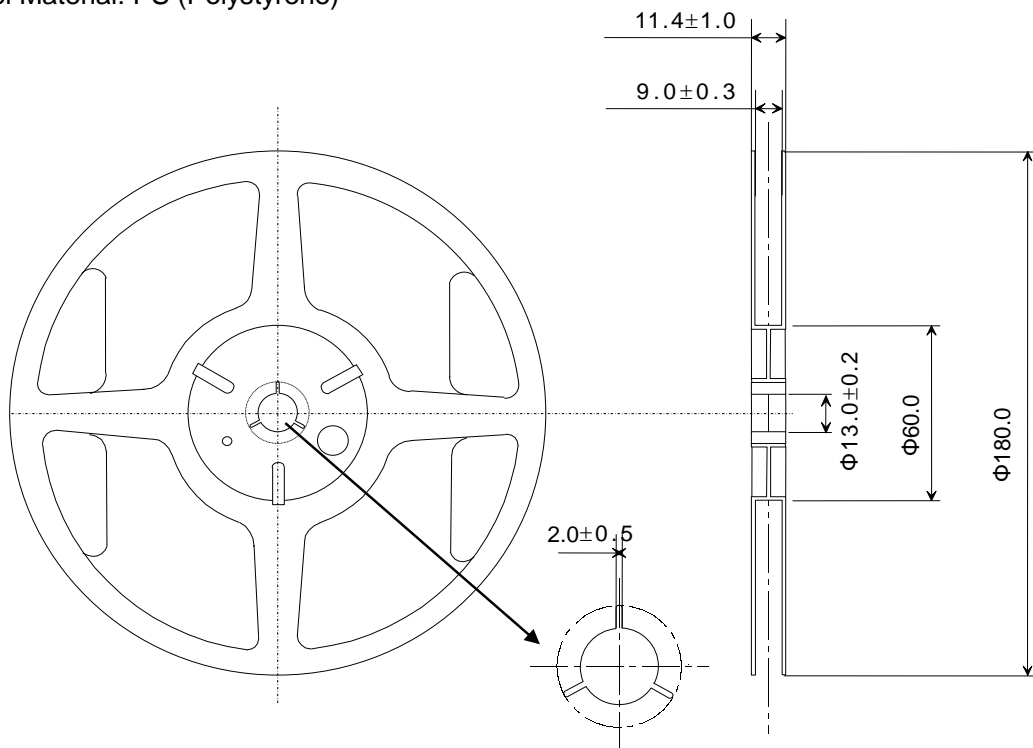

## 3) Storage Environment

We recommend to keep less than +30 °C and 85 %RH of humidity in a packed condition, and to use it less than 6 months after delivery.

## (12-2) SG-210STF

## (1) Packing Quantity

The last two digits of the Product Number ( X1G004171xxxxxx) are a code that defines the packing quantity. The standard is "00" for a 3 000 pcs/Reel.

## (2) Taping Specification


Subject to EIA-481, IEC-60286 and JIS C0806

## 1) Tape Dimensions

Carrier Tape Material: PS (Polystyrene)

Top Tape Material: PET (Polyethylene Terephthalate) +PE (Polyethylene)

Units: mm

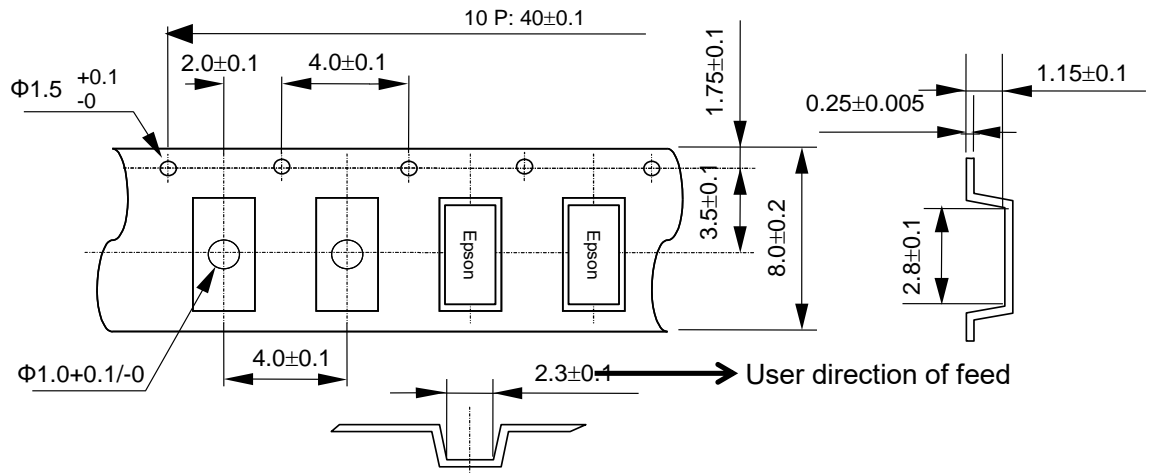


## 2) Reel Dimensions

Center Material: PS (Polystyrene)

Reel Material: PS (Polystyrene)

Units: mm

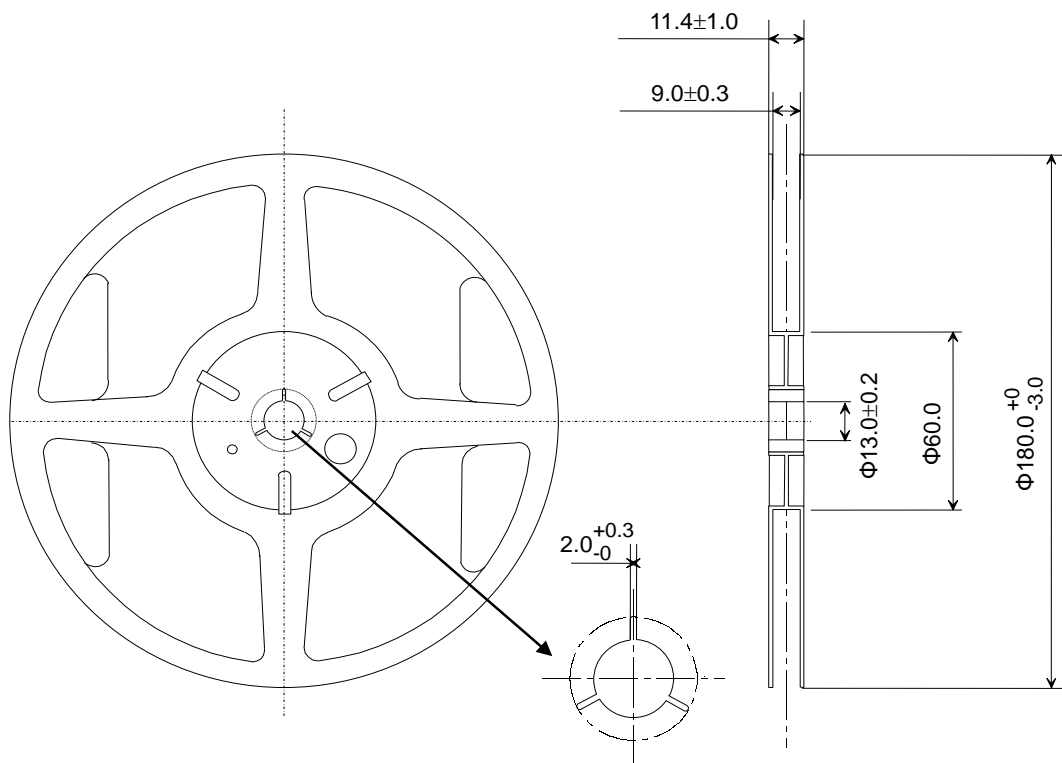

## 3) Storage Environment

We recommend to keep less than  $+30\text{ }^{\circ}\text{C}$  and 85 %RH of humidity in a packed condition, and to use it less than 6 months after delivery.

(12-3) SG3225CAN

(1) Packing Quantity

The last two digits of the Product Number ( X1G005961xxxxxx) are a code that defines the packing quantity. The standard is "15" for a 2 000 pcs/Reel.

(2) Taping Specification


Subject to EIA-481, IEC-60286 and JIS C0806

1) Tape Dimensions

Carrier Tape Material: PS (Polystyrene)

Top Tape Material: PET (Polyethylene Terephthalate) +PE (Polyethylene)

Units: mm

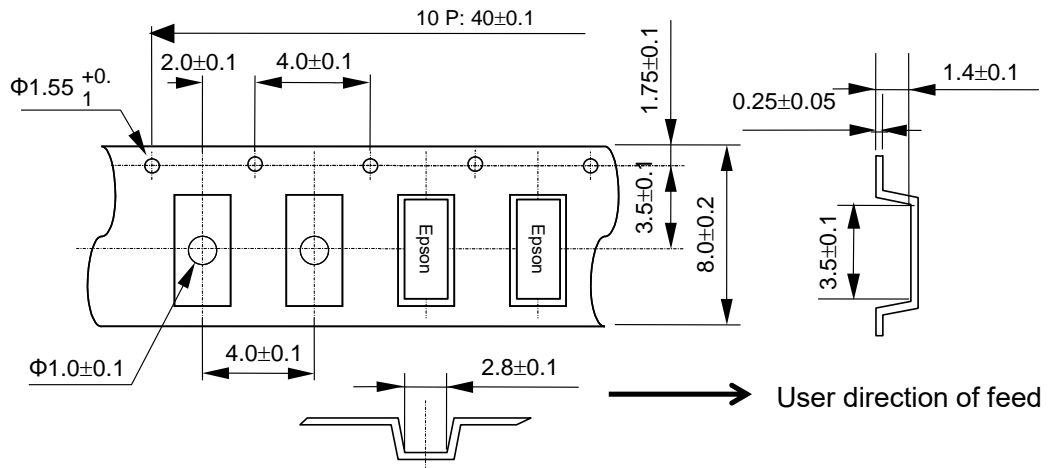


2) Reel Dimensions

Center Material: PS (Polystyrene)

Reel Material: PS (Polystyrene)

Units: mm

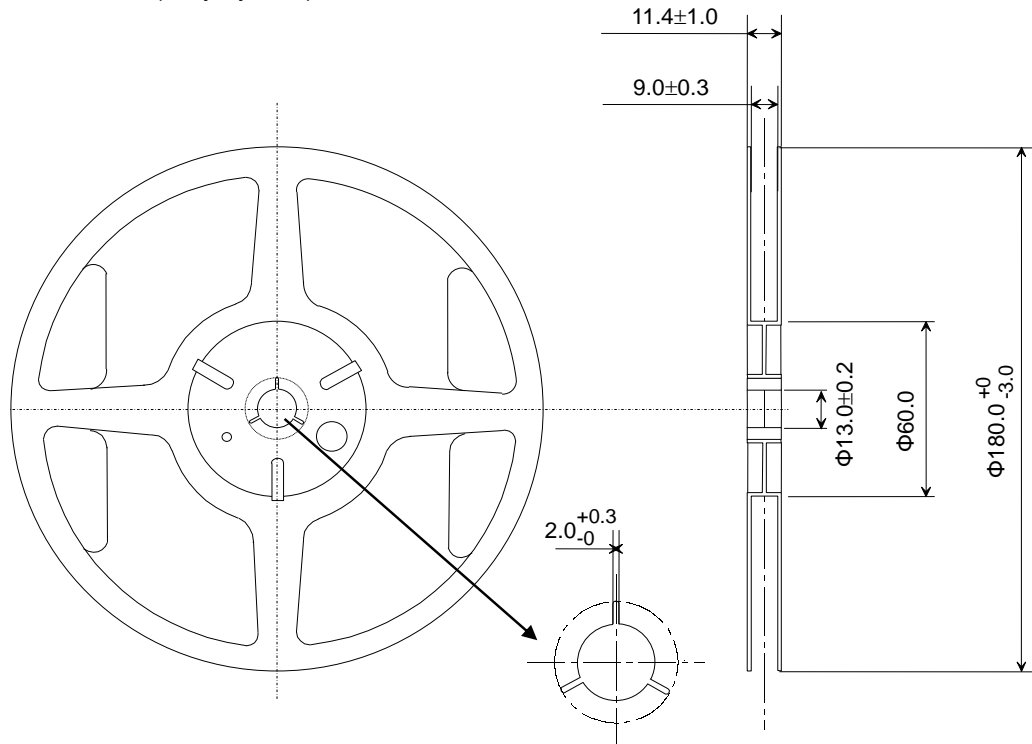

3) Storage Environment

We recommend to keep less than +30 °C and 85 %RH of humidity in a packed condition, and to use it less than 6 months after delivery.

(12-4) SG5032CAN

(1) Packing Quantity

The last two digits of the Product Number ( X1G004451xxxxxx) are a code that defines the packing quantity. The standard is "00" for a 1 000 pcs/Reel.

(2) Taping Specification


Subject to EIA-481, IEC-60286 and JIS C0806

1) Tape Dimensions

Carrier Tape Material: PS (Polystyrene)

Top Tape Material: PET (Polyethylene Terephthalate) +PE (Polyethylene)

Units: mm

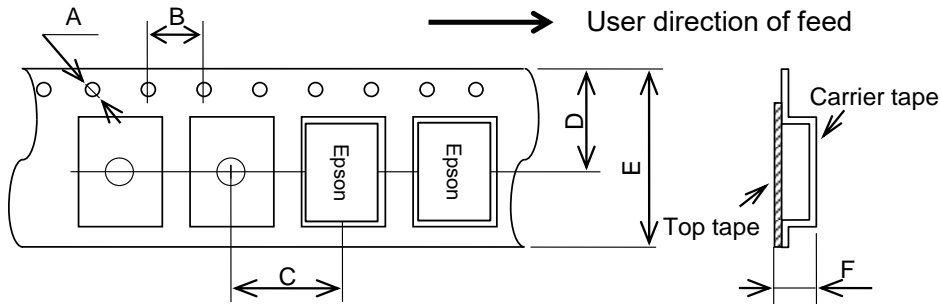


| Symbol | A                       | B             | C             | D              | E              | F              |
|--------|-------------------------|---------------|---------------|----------------|----------------|----------------|
| Value  | $\phi 1.5$<br>$+0.1/-0$ | $4.0 \pm 0.1$ | $8.0 \pm 0.1$ | $7.25 \pm 0.2$ | $12.0 \pm 0.2$ | $1.40 \pm 0.1$ |

2) Reel Dimensions

Center Material: PS (Polystyrene)

Reel Material: PS (Polystyrene)

Units: mm

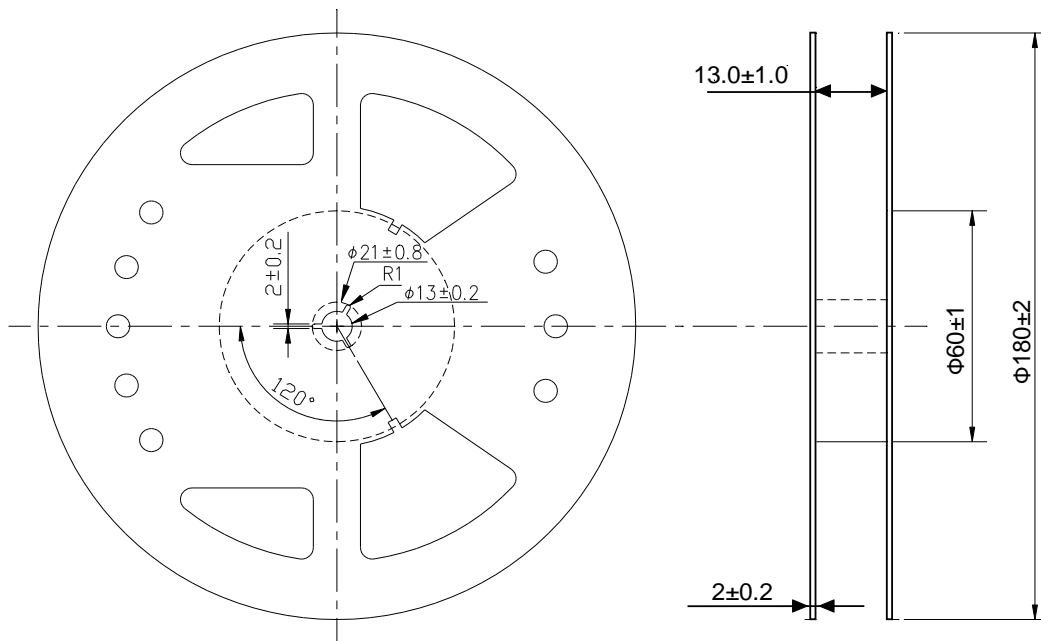

3) Storage Environment

We recommend to keep less than +30 °C and 85 %RH of humidity in a packed condition, and to use it less than 6 months after delivery.



## (12-5) SG7050CAN

## (1) Packing Quantity

The last two digits of the Product Number ( X1G004481xxxxxx) are a code that defines the packing quantity. The standard is "00" for a 1 000 pcs/Reel.

## (2) Taping Specification


Subject to EIA-481, IEC-60286 and JIS C0806

## 1) Tape Dimensions

Carrier Tape Material: PS (Polystyrene)

Top Tape Material: PET (Polyethylene Terephthalate) +PE (Polyethylene)

Units: mm

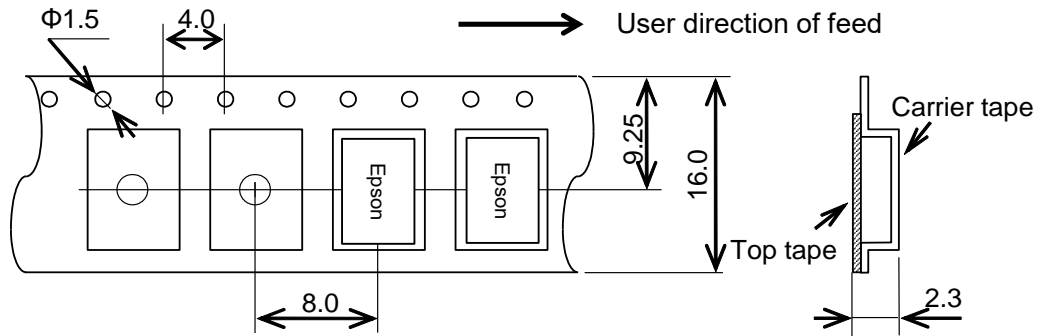


## 2) Reel Dimensions

Center Material: PS (Polystyrene)

Reel Material: PS (Polystyrene)

Units: mm

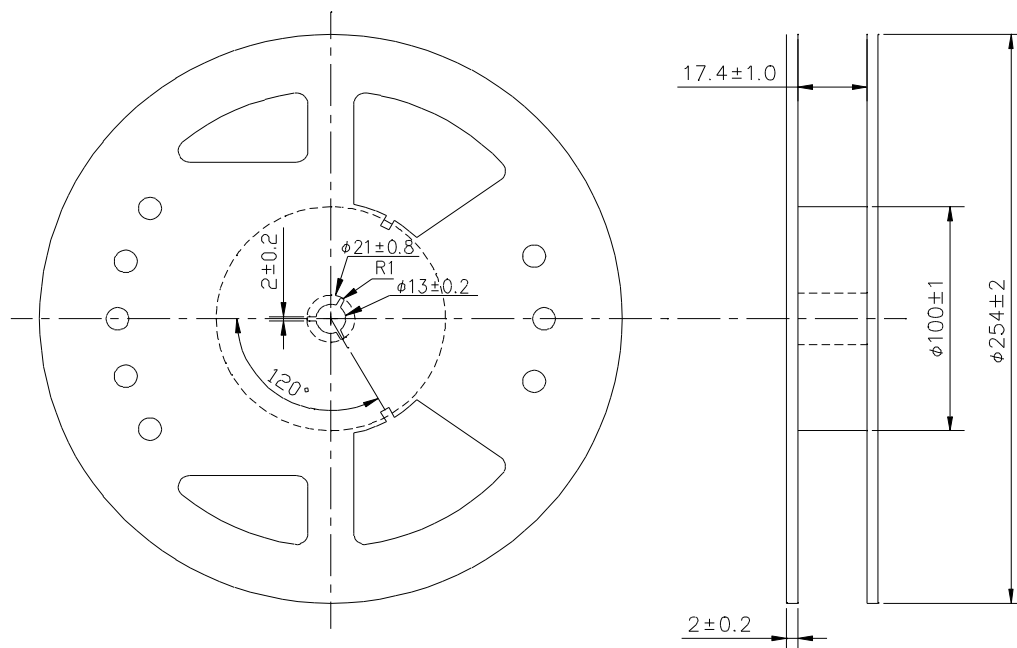

## 3) Storage Environment

We recommend to keep less than +30 °C and 85 %RH of humidity in a packed condition, and to use it less than 6 months after delivery.

### [ 13 ] Handling Precautions

Prior to using this product, please carefully read the section entitled "Precautions" on our Web site (<https://www5.epsondevice.com/en/information/#precaution>) for instructions on how to handle and use the product properly to ensure optimal performance of the product in your equipment.

Before using the product under any conditions other than those specified therein, please consult with us to verify and confirm that the performance is not affected by use under such conditions.

In addition to the foregoing precautions, in order to avoid the deteriorating performance of the product, we strongly recommend that you DO NOT use the product under ANY of the following conditions:

- (1) Mounting the product on a board using water-soluble solder flux and using the product without removing the residue of the flux completely from the board. The residue of such flux that is soluble in water or water-soluble cleaning agent, especially the residues which contains active halogens, will negatively affect the performance and reliability of the product.
- (2) Using the product in any manner that will result in any shock or impact to the product.
- (3) Using the product in places where the product is exposed to water, chemicals, organic solvent, sunlight, dust, corrosive gasses, or other materials.
- (4) Using the product in places where the product is exposed to static electricity or electromagnetic waves.
- (5) Applying ultrasonic cleaning without advance verification and confirmation that the product will not be affected by such a cleaning process, because it may damage the crystal,
- (6) Using the product under any other conditions that may negatively affect the performance and/or reliability of the product.
- (7) Power supply with ripple may cause of incorrect operation or degradation of phase noise characteristics, so please evaluate before use.
- (8) Supply voltage should be increased monotonically.  
In addition, please do not power on at midpoint potential since that may cause malfunction or not output.
- (9) Frequency aging is from environmental tests results to the expectation of the amount of the frequency variation. This doesn't guarantee the product-life cycle.

Should any customer use the product in any manner contrary to the precautions and/or advice herein, such use shall be done at the customer's own risk.

## PROMOTION OF ENVIRONMENTAL MANAGEMENT SYSTEM CONFORMING TO INTERNATIONAL STANDARDS

At Seiko Epson, all environmental initiatives operate under the Plan-Do-Check-Action (PDCA) cycle designed to achieve continuous improvements. The environmental management system (EMS) operates under the ISO 14001 environmental management standard.

All of our major manufacturing and non-manufacturing sites, in Japan and overseas, completed the acquisition of ISO 14001 certification.



ISO 14000 is an international standard for environmental management that was established by the International Standards Organization in 1996 against the background of growing concern regarding global warming, destruction of the ozone layer, and global deforestation.

## WORKING FOR HIGH QUALITY

In order provide high quality and reliable products and services than meet customer needs, Seiko Epson made early efforts towards obtaining ISO9000 series certification and has acquired ISO9001 for all business establishments in Japan and abroad. We have also acquired IATF 16949 certification that is requested strongly by major manufacturers as standard.

IATF 16949 is the international standard that added the sector-specific supplemental requirements for automotive industry based on ISO9001.

### ■ Explanation of marks used in this datasheet

|   |  |
|---|--|
|  | <p>●Pb free.</p>   |
|  | <p>●Complies with EU RoHS directive.<br/>*About the products without the Pb-free mark.<br/>Contains Pb in products exempted by EU RoHS directive<br/>(Contains Pb in sealing glass, high melting temperature type solder or other)</p> |

NOTICE: PLEASE READ CAREFULLY BELOW BEFORE THE USE OF THIS DOCUMENT ©Seiko Epson Corporation 2020

- The content of this document is subject to change without notice. Before purchasing or using Epson products, please contact with sales representative of Seiko Epson Corporation ("Epson") for the latest information and be always sure to check the latest information published on Epson's official web sites and resources.
- This document may not be copied, reproduced, or used for any other purposes, in whole or in part, without Epson's prior consent.
- Information provided in this document including, but not limited to application circuits, programs and usage, is for reference purpose only. Epson makes no guarantees against any infringements or damages to any third parties' intellectual property rights or any other rights resulting from the information. This document does not grant you any licenses, any intellectual property rights or any other rights with respect to Epson products owned by Epson or any third parties.
- Using Epson products, you shall be responsible for safe design in your products; that is, your hardware, software, and/or systems shall be designed enough to prevent any critical harm or damages to life, health or property, even if any malfunction or failure might be caused by Epson products. In designing your products with Epson products, please be sure to check and comply with the latest information regarding Epson products (including, but not limited to this document, specifications, data sheets, manuals, and Epson's web site). Using technical contents such as product data, graphic and chart, and technical information, including programs, algorithms and application circuit examples under this document, you shall evaluate your products thoroughly both in stand-alone basis and within your overall systems. You shall be solely responsible for deciding whether to adopt/use Epson products with your products.
- Epson has prepared this document carefully to be accurate and dependable, but Epson does not guarantee that the information is always accurate and complete. Epson assumes no responsibility for any damages you incurred due to any misinformation in this document.
- No dismantling, analysis, reverse engineering, modification, alteration, adaptation, reproduction, etc., of Epson products is allowed.
- Epson products have been designed, developed and manufactured to be used in general electronic applications and specifically requires particular quality or extremely high reliability in order to refrain from causing any malfunction or failure leading to critical harm to life and health, serious property damage, or severe impact on society, including, but not limited to listed below ("Specific Purpose"). Therefore, you are strongly advised to use Epson products only for the Anticipated Purpose. Should you desire to purchase and use Epson products for Specific Purpose, Epson makes no warranty and disclaims with respect to Epson products, whether express or implied, including without limitation any implied warranty of merchantability or fitness for any Specific Purpose. Please be sure to contact our sales representative in advance, if you desire Epson products for Specific Purpose:  
Space equipment (artificial satellites, rockets, etc.)/ Transportation vehicles and their control equipment (automobiles, aircraft, trains, ships, etc.) / Medical equipment/ Relay equipment to be placed on sea floor/ Power station control equipment / Disaster or crime prevention equipment/Traffic control equipment/ Financial equipment  
Other applications requiring similar levels of reliability as the above
- Epson products listed in this document and our associated technologies shall not be used in any equipment or systems that laws and regulations in Japan or any other countries prohibit to manufacture, use or sell. Furthermore, Epson products and our associated technologies shall not be used for the purposes of military weapons development (e.g. mass destruction weapons), military use, or any other military applications. If exporting Epson products or our associated technologies, please be sure to comply with the Foreign Exchange and Foreign Trade Control Act in Japan, Export Administration Regulations in the U.S.A (EAR) and other export-related laws and regulations in Japan and any other countries and to follow their required procedures.
- Epson assumes no responsibility for any damages (whether direct or indirect) caused by or in relation with your non-compliance with the terms and conditions in this document or for any damages (whether direct or indirect) incurred by any third party that you give, transfer or assign Epson products.
- For more details or other concerns about this document, please contact our sales representative.
- Company names and product names listed in this document are trademarks or registered trademarks of their respective companies.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard Clock Oscillators](#) category:*

*Click to view products by [Epson](#) manufacturer:*

Other Similar products are found below :

[601252](#) [F335-25](#) [F535L-33.333](#) [F535L-50](#) [NBXHBA019LN1TAG](#) [SiT1602BI-22-33E-50.000000E](#) [SIT8918AA-11-33S-50.000000G](#)  
[SM4420TEV-40.0M-T1K](#) [F335-24](#) [F335-40](#) [F535L-10](#) [F535L-12](#) [F535L-24](#) [F535L-27](#) [PE7744DW-100.0M](#) [ASF1-3.686MHZ-N-K-S](#) [ASV-](#)  
[4.000MHZ-LCS-T](#) [XO57CTECNA3M6864](#) [601251](#) [SiT8503AI-18-33E-0.200000X](#) [SIT9122AI2C233E300.000000X](#) [9120AC-2D2-](#)  
[33E212.500000](#) [9102AI-243N25E100.000000](#) [8208AC-82-18E-25.000000](#) [8008AI-72-XXE-24.545454E](#) [8004AC-13-33E-133.330000X](#) [AS-](#)  
[4.9152-16-SMD-TR](#) [ASFL1-48.000MHZ-LC-T](#) [632L3I004M000000](#) [SIT8920AM-31-33E-25.000000](#) [DSC1028DI2-019.2000](#) [9121AC-2C3-](#)  
[25E100.000000](#) [9102AI-233N33E100.000000X](#) [9102AI-233N25E200.000000](#) [9102AI-232H25S125.000000](#) [9102AI-133N25E200.000000](#) [9102AC-](#)  
[283N25E200.000000](#) [9001AC-33-33E1-30.000000](#) [8103AC-13-33E-12.000000X](#) [3921AI-2CF-33NZ125.000000](#) [5730-1SF](#) [XUN736000.032768I](#)  
[ASV-25.000MHZ-ECS-50-T](#) [EC3925ETTTS-100.000M TR](#) [SIT1602BC-83-33E-10.000000Y](#) [8003AI-12-33S-40.000000Y](#) [1602BI-13-33S-](#)  
[19.200000E](#) [8208AI-2F-18E-25.000000X](#) [8103AI-83-33E-33.000000X](#) [8208AI-8F-33E-66.666666X](#)