


**Pin connectors**  
**Series B25**  
 Single connector



Hole pattern

No. of contacts	Contact arrangement	Press-fit technology – Performance level II	
		PCB thickn. 1.6 – 2.8	PCB thickness > 2.8
		Part number	
25		243-21010-05	243-21010-15
25		243-21020-05	243-21020-15
75		243-21310-05	243-21310-15
75		243-21320-05	243-21320-15

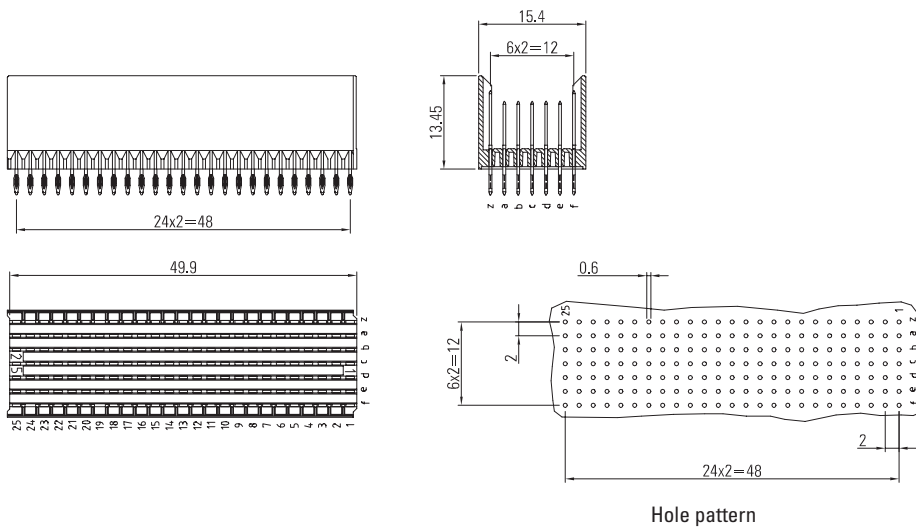

**On request**

- Performance level I or customer-specific
- Contact arrangement (see page 75)

**Accessories**


- Press-fit tool (see page 200)
- Support tool (see page 201)
- Shroud (see page 66)

**Cross reference**

- Pin lengths (see page 34)

**hm connectors**  
**Type B25**  
 Female connector

Dimensions in mm

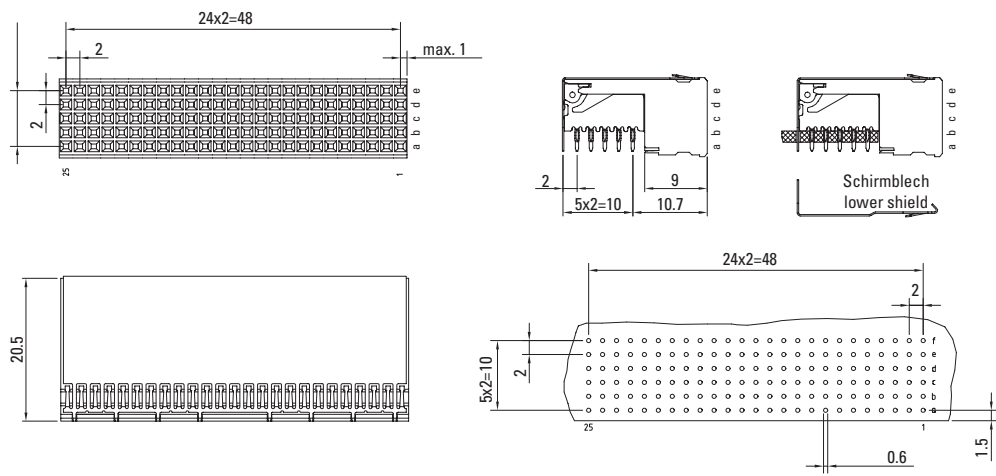

Hole pattern

No. of contacts	Description	Press-fit technology
		Performance level II
		Part number
125	Without shielding	244-21000-15
125	With shielding	244-21300-15
–	Lower shield	244-21600-1



**On request**  
 – Performance level I or

**Accessories**  
 – Press-fit tool

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [EPT manufacturer](#):*

Other Similar products are found below :

[111-40064](#) [114-40050](#) [112-40065](#) [404-52040-51](#) [401-51501-51](#) [116-90064](#) [104-80075](#) [101-40064](#) [104-40075](#) [243-11322-15](#) [103-90064](#)  
[403-51040-51](#) [114-40090](#) [113-40010](#) [243-23320-15](#) [304-80064-01](#) [962-40206-03](#) [102-80065](#) [244-62300-15](#) [244-11000-15](#) [103-40034](#) [114-](#)  
[40040](#) [115-40074](#) [108-40064](#) [101-80014](#) [244-23300-15](#) [112-40064](#) [107-40065](#) [244-61300-15](#) [401-55501-51](#) [402-51501-51](#) [404-51050-51](#)  
[107-40064](#) [113-40160](#) [304-40064-01](#) [404-53032-51](#) [264-60303-12](#) [403-52012-51](#) [403-52050-51](#) [243-22310-15](#) [403-51050-51](#) [114-40080](#)  
[109-40064](#) [402-51101-51](#) [104-49064](#) [116-40054](#) [105-40064](#) [401-55101-51](#) [243-11310-15](#) [244-11300-15](#)