



ERF8-020-05.0-S-DV-TR



ERF8-040-05.0-S-DV-TR



ERF8-060-05.0-L-DV-TR

(0.80 mm) .0315"

ERF8 SERIES

RUGGED HIGH-SPEED SOCKET

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?ERF8

Insulator Material:

Black LCP

Contact Material:

BeCu

Plating:

Au or Sn over 50 μm (1.27 μm) Ni

Current Rating:

2.2 A per pin

(2 pins powered)

Operating Temp Range:

-55 °C to + 125 °C

Voltage Rating:

225 VAC / 318 VDC

RoHS Compliant:

Yes

PROCESSING

Lead-Free Solderable:

Yes

SMT Lead Coplanarity:

(0.10 mm) .004" max (005-030)

(0.12 mm) .005" max (040-060)*

(0.15 mm) .006" max (070-100)*

*(.004" stencil solution may be available; contact

IPG@samtec.com)

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



ALSO AVAILABLE (MOQ Required)

- Mezzanine stack heights

APPLICATIONS

STANDARD	POS.	PART NOS.	SERIES
NEXUS5001™.org POWER.org™	10	ASP-148421-01	ERF8-DV
	11	ASP-137969-01	ERF8-DV
	17	ASP-137973-01	ERF8-DV
ARM/HSSTP	20	ASP-130367-01	ERF8-DV
	23	ASP-130368-01	ERF8-DV
NEXUS5001™.org POWER.org™	25	ASP-148422-01	ERF8-DV
	35	ASP-135029-01	ERF8-DV
	40	ASP-148424-01	ERF8-DV

Notes:
Patented

Some lengths, styles and options are non-standard, non-returnable.


Board Mates:
ERM8

Cable Mates:
ERCD, ERDP



Robust Edge Rate® contact improves "Zippered" unmating

10 to 200 I/Os



MATED HEIGHT*				
ERF8 LEAD STYLE	ERM8 LEAD STYLE			
	-02.0	-05.0	-08.0	-09.0
-05.0	(7.00) .276	(10.00) .394	(13.00) .512	(14.00) .551
-07.0	(9.00) .354	(12.00) .472	(15.00) .591	(16.00) .629
-09.0	(11.00) .453	(14.00) .551	(17.00) .669	(18.00) .709

*Processing conditions will affect mated height.

HIGH-SPEED CHANNEL PERFORMANCE

ERM8/ERF8 @ 7 mm Mated Stack Height

Rating based on Samtec reference channel.

For full SI performance data visit Samtec.com or contact SLG@samtec.com

PAM 4

56 Gbps

POWER/SIGNAL APPLICATION

Compatible with UMPT/UMPS for flexible two-piece power/signal solutions

ERF8 ■ **NO. OF POSITIONS PER ROW** ■ **LEAD STYLE** ■ **PLATING OPTION** ■ **DV** ■ **OTHER OPTION** ■ **TR**

-005, -010, -011, -013, -020, -025, -030, -035, -040, -049, -050, -060, -070, -075

-100 (Available with -05.0 lead style only)

Specify LEAD STYLE from chart

LEAD STYLE	A
-05.0	(5.10) .200
-07.0	(7.00) .276
-09.0	(9.00) .354

-L
= 10 μm (0.25 μm) Gold on contact, Matte Tin on tail

-S
= 30 μm (0.76 μm) Gold on contact, Matte Tin on tail


-L
= Latching (Lead Style -05.0 only) (Not available with -EGP or -EGPS options)

-EGP
= Extended Guide Post (Lead Style -07.0 only) (Not available with -L & -EGPS option)

-EGPS
= Extended Guide Post Shield (Lead Style -07.0 only) (Not available with -L & -EGP option) (-010, -020, -025, -030 only)

-TR
= Tape & Reel Packaging (Not available with 100 positions)

-K
= (6.00 mm) .236" DIA Polyimide Film Pick & Place Pad

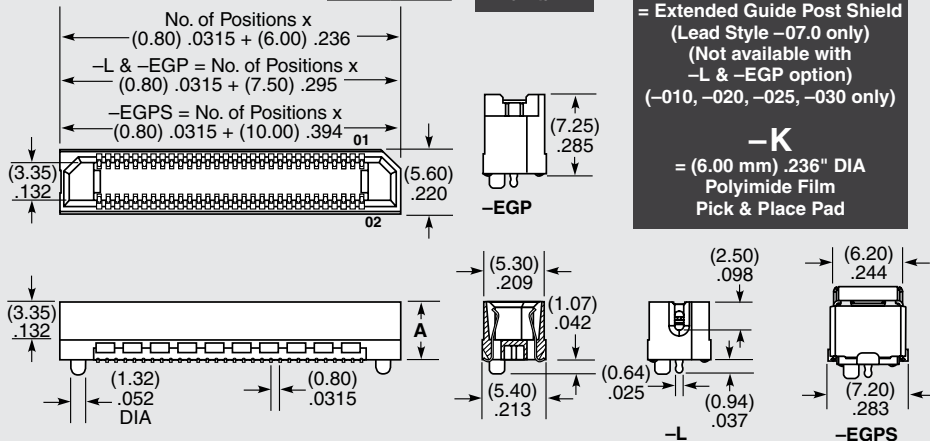

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications. Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[10135583-642402LF](#) [89885-310LF](#) [589158040000018](#) [6-1393048-0](#) [68683-613](#) [MDF7-12DP-2.54DSA](#) [MDF7-18P-2.54DSA\(01\)](#) [MDF7-20DP-2.54DSA](#) [MDF7-26D-2.54DSA\(55\)](#) [MDF7-3P-2.54DSA\(01\)](#) [MDF7B-3P-2.54DSA\(55\)](#) [MDF7C-11P-2.54DSA\(55\)](#) [MDF7C-18P-2.54DSA\(55\)](#) [MDF7C-5P-2.54DSA\(01\)](#) [MDF7P-5P-2.54DSA\(55\)](#) [75234-0516](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-360C008-C](#) [FCN-360C040-C](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [93696-325LF](#) [11828-1FA](#) [AXK630345P](#) [18097-0013](#) [ICA-328STT](#) [2007042-2](#) [304400-2](#) [FCN-214Q030-G/0](#) [FCN-215Q040-G/0](#) [FCN-230C068-ESA](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [FCN-360A3](#) [FCN-360C040-B](#) [210-93-314-41-105000](#) [2-22603-0](#) [379-064-521-202](#) [MDF7-12P-2.54DSA\(01\)](#) [MDF7-16P-2.54DS\(56\)](#) [MDF7-40DP-2.54DSA\(55\)](#) [MDF7-8P-2.54DSA\(55\)](#) [MDF7B-16P-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#)