


## Constant Current LED Drivers with Deep TRIAC and ELV Dimming (1 – 100%) and with Fast Startup Time

Nominal Input Voltage	Max. Output Power	Output Voltage	Output Current	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 or 220/230/240 Vac	21 W	16 to 42 Vdc	200 to 700 mA CC	up to 85% typical	90°C (measured at the hot spot)	< 20%	> 0.9	Forward-Phase, Reverse-Phase	1 - 100% (% of Iout)	200 ms

CC: Constant Current

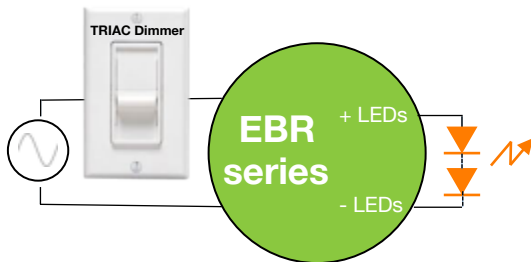

**Plastic Case**  
Diameter: 58 mm (2.28 in)  
Height: 31.7 mm (1.25 in)

### FEATURES

- Compatible with industry standard phase-cut dimmers: TRIAC (forward-phase or leading-edge) and ELV (reverse-phase or trailing-edge)
- Lifetime: 50,000 hours or more at 70°C case hot spot temperature 90°C maximum case hot spot temperature
- Low acoustic noise of 20 dBA
- Class 2 power supply
- Protections: output open load, over-current and short-circuit (hiccup), and over-temperature with auto recovery
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class B at 120 Vac and EN55015 (CISPR 15) at 220, 230 and 240 Vac
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements
- IP20-rated case with silicon-based potting
- Worldwide Safety approvals



ERP Part Number	Nominal Input Voltage (Vac)	Iout (mA)	Max Output Power (W)	Output Voltage Range (Vdc)	
				Min	Max

120 VAC NOMINAL INPUT VOLTAGE	EBR010U: 8 to 10 W					
	EBR010U-0200-42	120	200	8.4	30	42
EBR010U-0250-42	120	250	10.5	30	42	
EBR010U-0440-24	120	440	10.6	16	24	
EBR010U-0700-14	120	700	9.8	9	14	
120 VAC NOMINAL INPUT VOLTAGE	EBR015U: 11 to 15 W					
	EBR015U-0300-42	120	300	12.6	30	42
EBR015U-0350-32	120	350	11.2	21	32	
EBR015U-0350-42	120	350	14.7	30	42	
EBR015U-0440-36	120	440	15.8	24	36	
EBR015U-0500-28	120	500	14.0	19	28	
120 VAC NOMINAL INPUT VOLTAGE	EBR020U: 16 to 21 W					
	EBR020U-0400-42	120	400	16.8	30	42
EBR020U-0460-42	120	460	19.3	30	42	
EBR020U-0500-32	120	500	16.0	21	32	
EBR020U-0500-37	120	500	18.5	25	37	
EBR020U-0500-42	120	500	21.0	30	42	
EBR020U-0700-24	120	700	16.8	16	24	
EBR020U-0700-30	120	700	21.0	20	30	
EBR020U-0720-21	120	720	15.1	14	21	
EBR020U-0720-28	120	720	20.2	19	28	
230 VAC NOMINAL INPUT VOLTAGE	EBR010E: 8 to 10 W					
	EBR010E-0200-42-CE	220/230/240	200	8.4	30	42
EBR010E-0250-42-CE	220/230/240	250	10.5	30	42	
230 VAC NOMINAL INPUT VOLTAGE	EBR015E: 11 to 15 W					
	EBR015E-0350-42-CE	220/230/240	350	14.7	30	42
EBR015E-0440-36-CE	220/230/240	440	15.8	24	36	
230 VAC NOMINAL INPUT VOLTAGE	EBR020E: 16 to 21 W					
	EBR020E-0400-42-CE	220/230/240	400	16.8	30	42
EBR020E-0500-42-CE	220/230/240	500	21.0	30	42	

**Notes:**

For additional options of output current and output voltage, contact your sales representative or send an email to: [SaveEnergy@erp-power.com](mailto:SaveEnergy@erp-power.com)

### APPLICATIONS

- Recessed lighting (downlights)
- Commercial & Residential lighting
- Architectural lighting



**CHINA Operations**  
tel: +86-756-6266298  
No. 8 Pingdong Road 2  
Zhuhai, Guangdong, China 519060

[www.erp-power.com](http://www.erp-power.com)

[SaveEnergy@erp-power.com](mailto:SaveEnergy@erp-power.com)

**USA Headquarters**  
tel: +1-805-517-1300  
893 Patriot Drive, Suite E  
Moorpark, CA 93021, USA

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Power Supplies](#) category:*

*Click to view products by [ERP Power](#) manufacturer:*

Other Similar products are found below :

[ESS015W-1000-12](#) [EUC-075S105DT](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [SLM160W-3.9-40-ZA](#) [ESS010W-0180-42](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [PDA080B-1A0G](#) [PDA150B-S1A5G](#) [ZPS-20](#) [SLM140W-1.05-130-ZA](#) [ESS040W-1400-27](#) [ESS015W-0700-18](#) [ESS010E-0250-42](#) [EDC-100S105SV-0007](#) [79278](#) [EUD-150S350DVA](#) [LWA320-C420-ARK-B](#) [50304](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [OT FIT 50/220-240/300 D L](#) [OT FIT 35/220-240/350 D CS L](#) [OT FIT 65/220-240/350 D CS L](#) [ELEMENT 30/220-240/700 S](#) [LC 75W 100-400MA 1-10V LP EXC](#) [LCA 35W 150-700MA ONE4ALL LP PRE](#) [LCA 50W 100-400MA ONE4ALL LP PRE](#) [LCA 50W 350-1050MA ONE4ALL LP PRE](#) [LCA 50W 350-1050MA 2XCH LP PRE](#) [LCI 150/325-1050/300 O4A SL PRE](#) [LCA 75W 100-400MA ONE4ALL LP PRE](#) [LCA 45W 500-1400MA ONE4ALL SC PRE](#) [LC 50W 100-400MA FLEXC LP EXC](#) [LCA 75W 350-1050MA ONE4ALL LP PRE](#) [LC 50W 350-1050MA FLEXC LP EXC](#) [LC 75W 350-1050MA FLEXC LP EXC](#) [LCA 75W 900-1800MA ONE4ALL LP PRE](#) [LCA 100W 250-700MA ONE4ALL LP PRE](#)