




ESM Series

ESM020	10-20 W
ESM030	21-30 W
ESM040	31-40 W
ESM050	41-50 W
ESM060	51-60 W

Tri-Mode Dimming™ (0-10 V & TRIAC/ELV) Constant Current LED Drivers with Fast Startup Time

Input Voltage	Max. Output Power	Output Voltage	Output Current	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 to 277 Vac nominal	60 W	19 to 56 Vdc	280 mA to 1.4 A CC	up to 87% typical	90°C (measured at the hot spot)	< 20%	> 0.9	Forward-Phase, Reverse-Phase & 0 - 10V	1 - 100% (% of Iout)	300 ms typical

CC: Constant Current

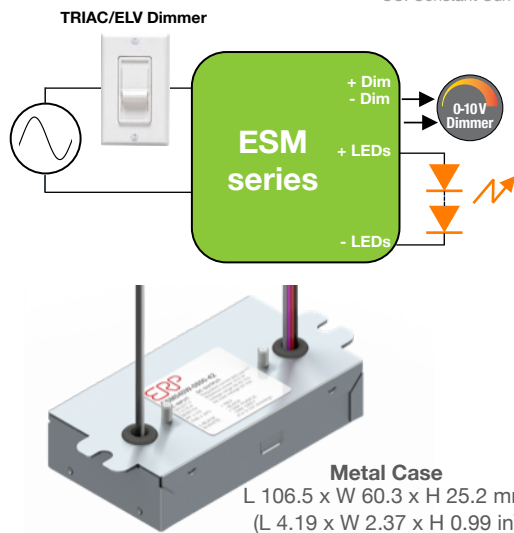

ERP Part Number	Nominal Input Voltage (Vac)	Iout (mA)	Max Output Power (W)	Output Voltage Range (Vdc)	
				Min	Max
ESM020W: 12 to 20 W					
ESM020W-0280-42	120 to 277	280	11.8	24	42
ESM020W-0350-42	120 to 277	350	14.7	24	42
ESM020W-0350-42-Z1 ⁽⁵⁾	120 to 277	350	14.7	24	42
ESM020W-0400-42	120 to 277	400	16.8	24	42
ESM020W-0440-25	120 to 277	440	11.0	19	25
ESM020W-0440-25-SS-F1B ^[1]	120 to 277	440	11.0	19	25
ESM020W-0440-34-SS-F1B ^[2]	120 to 277	440	15.0	27	34
ESM020W-0440-34	120 to 277	440	15.0	19	34
ESM020W-1000-14	120 to 277	1000	14.0	8	14
ESM030W: 21 to 30 W					
ESM030W-0500-42	120 to 277	500	21.0	24	42
ESM030W-0550-42	120 to 277	550	23.1	24	42
ESM030W-0700-32	120 to 277	700	22.4	21	32
ESM030W-0700-42	120 to 277	700	29.4	24	42
ESM030W-0700-42-Z1 ⁽⁵⁾	120 to 277	700	29.4	24	42
ESM030W-0900-26	120 to 277	900	23.4	19	26
ESM030W-0940-26-SS-F1B ^[3]	120 to 277	940	24.4	20.5	26
ESM030W-1750-14	120 to 277	1750	24.5	8	14
ESM040W: 31 to 40 W					
ESM040W-0700-56	120 to 277	700	39.2	40	56
ESM040W-0800-42	120 to 277	800	33.6	24	42
ESM040W-0850-42	120 to 277	850	35.7	24	42
ESM040W-0900-42	120 to 277	900	37.8	24	42
ESM040W-0940-33-SS-F1B ^[4]	120 to 277	940	31.0	28	33
ESM040W-0940-43	120 to 277	940	40.4	32	43
ESM050W: 41 to 50 W					
ESM050W-1050-42	120 to 277	1050	44.1	24	42
ESM050W-1050-42-Z1 ⁽⁵⁾	120 to 277	1050	44.1	24	42
ESM050W-1200-42	120 to 277	1200	50.4	24	42
ESM050W-1400-34	120 to 277	1400	47.6	23	34
ESM060W: 51 to 60 W					
ESM060W-1400-42	120 to 277	1400	58.8	24	42

Notes:

- 1) The ESM020W-0440-25-SS-F1B is specifically intended to drive the Cree LMH2 850 sunset module and exhibits a customized 0-10V dimming transfer function. It will not work with any other LED or LED string.
- 2) The ESM020W-0440-34-SS-F1B is specifically intended to drive the Cree LMH2 1250 sunset module and exhibits a customized 0-10V dimming transfer function. It will not work with any other LED or LED string.
- 3) The ESM030W-0940-26-SS-F1B is specifically intended to drive the Cree LMH2 2000 sunset module and exhibits a customized 0-10V dimming transfer function. It will not work with any other LED or LED string.
- 4) The ESM040W-0940-33-SS-F1B is specifically intended to drive the Cree LMH2 3000 sunset module and exhibits a customized 0-10V dimming transfer function. It will not work with any other LED or LED string.
- 5) Models with the "Z1" suffix exhibit a non-linear 0-10V dimming profile: (10V to 9.1V=100%, 1V to 0.8V=1%, <0.8V dim-to-off).
- 6) For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@erp-power.com.

FEATURES

- Compatible with TRIAC (forward-phase or leading-edge), ELV (reverse-phase or trailing-edge) and 0-10 V dimmers
- TRIAC and ELV dimming only at 120 Vac
- Linear 0-10V dimming transfer function (10V=100%, 1V=10%, 0.1V=1%). Models with the "Z1" suffix exhibit a non-linear 0-10V dimming profile (10V to 9.1V=100%, 1V to 0.8V=1%, <0.8V dim-to-off).
- Lifetime: 50,000 hours min at 70°C case temperature
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class B (120 Vac)/Class A (277 Vac) and EN55015 (CISPR 15) at 220/230/240 Vac
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements
- IP20-rated Bottom Leads with Studs metal case with silicone-based potting.
- 90°C maximum case hot spot temperature
- Class 2 power supply

APPLICATIONS

- Recessed downlights
- Residential lighting
- Commercial lighting
- Architecture Lighting

CHINA Operations

tel: +86-756-6266298
No. 8 Pingdong Road 2
Zhuhai, Guangdong, China 519060

www.erp-power.com

SaveEnergy@erp-power.com

USA Headquarters

tel: +1-805-517-1300
893 Patriot Drive, Suite E
Moorpark, CA 93021, USA

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Power Supplies](#) category:

Click to view products by [ERP Power](#) manufacturer:

Other Similar products are found below :

[ESS015W-1000-12](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [79534](#) [79535](#)
[EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [ESM060W-1400-42](#)
[PDA080B-1A0G](#) [ESS010W-0500-12](#) [PDA150B-S1A5G](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [EUD-150S350DVA](#) [LWA320-C420-](#)
[ARK-B](#) [HVG-240-48AB](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [ELG-240-C1400AB](#) [EUK-150S105DV](#) [BXCS-12Z-N2P-B1-A](#) [BXPR-WN-01-A](#)
[LN1224CV](#) [BXCS-12D-N2P-01-A](#) [BXCS-12W-N2P-01-A](#) [HBG-160-24AB](#) [980100001200394](#) [980060001200376](#) [LC 14W 250-350MA](#)
[FLEXC R ADV2](#) [LC 24W 500-600MA FLEXC R ADV2](#) [LC 36W 850-900MA FLEXC R ADV2](#) [LC 50W 200-350ML 170V FLEXC LP](#)
[SNC4](#) [LC 25W 200-350ML 70V FLEXC LP SNC4](#) [LC 35W 200-350ML 121V FLEXC LP SNC4](#) [LCBI 10W 350MA PHASE-CUT/1-10V LP](#)
[LC 13W 300MA FIXC C SNC](#) [LC 10W 250MA FIXC SC SNC2](#) [LC 35W 800MA FIXC SR ADV2](#) [LC 38W 900MA FIXC SR ADV2](#) [LC](#)
[34W 800MA FIXC SC ADV2](#) [LC 44W 1050MA FIXC SC ADV2](#) [LC 38W 900MA 42V FIXC SRL ADV2](#)