


Tri-Mode Dimming™ (0-10 V & TRIAC/ELV) Constant Current LED Drivers with Fast Startup Time

Nominal Input Voltage	Max. Output Power	Output Voltage	Output Current	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 to 277 Vac, 220 to 240 Vac	60 W	21 to 56 Vdc	700 mA to 1.4 A CC	up to 87% typical	90°C (measured at the hot spot)	< 20%	> 0.9	Forward-Phase, Reverse-Phase & 0 - 10V	1 - 100% (% of Iout)	300 ms typical

CC: Constant Current

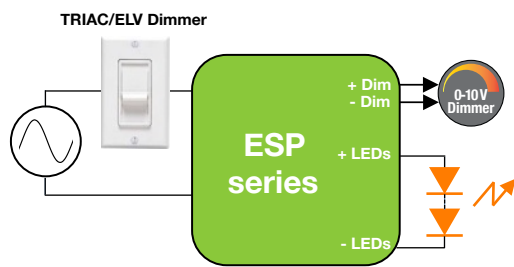

Plastic Case
 L 87 x W 60 x H 27.2 mm
 (L 3.43 x W 2.36 x H 1.07 in)

FEATURES

- **NOT RECOMMENDED FOR NEW DESIGNS. FOR NEW DESIGNS, USE THE ESPT SERIES.**
- Compatible with TRIAC (forward-phase or leading-edge), ELV (reverse-phase or trailing-edge) and 0-10 V dimmers
- ESPxxxW: TRIAC and ELV dimming only at 120 Vac.
- ESPxxxE: TRIAC and ELV dimming only at 230 Vac.
- Linear 0-10V dimming transfer function: 10V=100%, 1V=10%, 0.1V=1%
- Lifetime: 50,000 hours min at 70°C case temperature
- Protections: output open load, over-current and short-circuit (hiccup), and over-temperature with auto recovery
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class B (120 Vac)/Class A (277 Vac) and EN55015 (CISPR 15) at 220/230/240 Vac
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) and CA Title 24 technical requirements
- IP64-rated case with silicone-based potting
- 90°C maximum case hot spot temperature
- Class 2 power supply



CA Title 24



ERP Part Number	Nominal Input Voltage (Vac)	Iout (mA)	Max Output Power (W)	Output Voltage Range (Vdc)	
				Min	Max
120 to 277 VAC NOMINAL INPUT VOLTAGE					
ESP040W: 30 to 40W					
ESP040W-0700-56	120 to 277	700	39.2	40	56
ESP040W-0800-42	120 to 277	800	33.6	24	42
ESP040W-0850-42	120 to 277	850	35.7	24	42
ESP040W-0900-42	120 to 277	900	37.8	24	42
ESP040W-0940-33-SS-F1 ⁽¹⁾	120 to 277	940	31.0	28	33
ESP040W-0940-43	120 to 277	940	40.4	35	43
ESP050W: 41 to 50W					
ESP050W-1050-42	120 to 277	1050	44.1	24	42
ESP050W-1200-42	120 to 277	1200	50.4	24	42
ESP050W-1400-32	120 to 277	1400	44.8	21	32
ESP050W-1400-34	120 to 277	1400	47.6	23	34
ESP060W: 51 to 60W					
ESP060W-1400-42	120 to 277	1400	58.8	24	42
220 to 240 VAC NOMINAL INPUT VOLTAGE					
ESP040E: 30 to 40 W					
ESP040E-0800-42	220 to 240	800	33.6	24	42
ESP040E-0850-42	220 to 240	850	35.7	24	42
ESP040E-0900-42	220 to 240	900	37.8	24	42
ESP050E: 41 to 50 W					
ESP050E-1050-42	220 to 240	1050	44.1	24	42
ESP050E-1200-42	220 to 240	1200	50.4	24	42
ESP060E: 41 to 50 W					
ESP060E-1400-42	220 to 240	1400	58.8	24	42

Notes:

1. The ESP040W-0940-33-SS-F1 is specifically intended to drive the Cree LMH2 3000 sunset module and exhibits a customized 0-10V dimming transfer function. It will not work with any other LED or LED string.

APPLICATIONS

- Commercial lighting
- Residential lighting
- Architectural lighting
- Wide-area downlights

CHINA Operations
 tel: +86-756-6266298
 No. 8 Pingdong Road 2
 Zhuhai, Guangdong, China 519060

www.erp-power.com

SaveEnergy@erp-power.com

USA Headquarters
 tel: +1-805-517-1300
 893 Patriot Drive, Suite E
 Moorpark, CA 93021, USA

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Power Supplies](#) category:

Click to view products by [ERP Power](#) manufacturer:

Other Similar products are found below :

[ESS015W-1000-12](#) [EUC-075S105DT](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [LMD600-0100-C1A7-7030000](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [SLM160W-3.9-40-ZA](#) [ESS010W-0180-42](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [PDA080B-1A0G](#) [ESS010W-0500-12](#) [PDA150B-S1A5G](#) [ZPS-20](#) [SLM140W-1.05-130-ZA](#) [ESS040W-1400-27](#) [ESS015W-0700-18](#) [ESS010E-0250-42](#) [EVM120W-2700-42-ECN2](#) [EDC-100S105SV-0007](#) [79278](#) [EUD-150S350DVA](#) [LWA320-C420-ARK-B](#) [50304](#) [OT FIT 50/220-240/300 D L](#) [OT FIT 35/220-240/350 D CS L](#) [OT FIT 65/220-240/350 D CS L](#) [ELEMENT 30/220-240/700 S](#) [LC 75W 100-400MA 1-10V LP EXC](#) [LCA 35W 150-700MA ONE4ALL LP PRE](#) [LCA 50W 100-400MA ONE4ALL LP PRE](#) [LCA 50W 350-1050MA ONE4ALL LP PRE](#) [LCA 50W 350-1050MA 2XCH LP PRE](#) [LCI 150/325-1050/300 O4A SL PRE](#) [LCA 75W 100-400MA ONE4ALL LP PRE](#) [LCA 45W 500-1400MA ONE4ALL SC PRE](#) [LC 50W 100-400MA FLEXC LP EXC](#) [LCA 75W 350-1050MA ONE4ALL LP PRE](#) [LC 50W 350-1050MA FLEXC LP EXC](#) [LC 75W 350-1050MA FLEXC LP EXC](#) [LCA 75W 900-1800MA ONE4ALL LP PRE](#)