



260 W Programmable Constant Current LED Driver with 0-10 V Dimming

Nominal Input Voltage	Max. Output Power	Output Voltage	Output Current	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range
120 & 277 Vac	260 W	114 to 400 Vdc	325 mA to 1700 mA CC	up to 93% typical	90°C (measured at the hot spot)	< 20%	> 0.9	0 - 10V	1 - 100% (% of Iout)

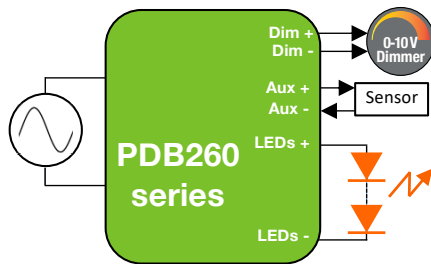

Ordering Part Number	Nominal Input Voltage (Vac)	Max Output Power (W)	Iout 1 (mA)	Vout 1 (Vdc)	Iout 2 (mA)	Vout 2 (Vdc)
PDB260W-0860-400	120 & 277	260	430 to 860	234 to 300	325 to 650	312 to 400
PDB260W-1300-280	120 & 277	260	650 to 1300	156 to 200	465 to 930	218 to 280
PDB260W-1700-210	120 & 277	260	850 to 1700	117 to 150	620 to 1240	164 to 210

For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@erp-power.com

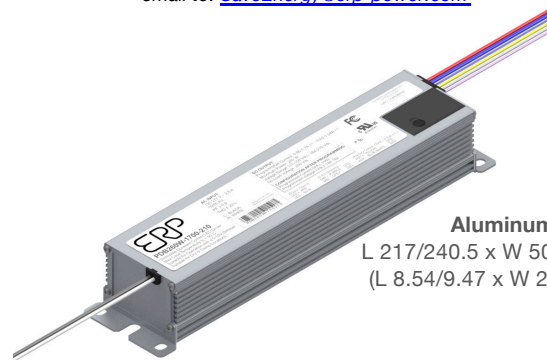

Aluminum Case

L 217/240.5 x W 50.8 x H 38.5 mm
(L 8.54/9.47 x W 2.00 x H 1.52 in)

FEATURES

- **Programmable Features**
 - Current: 100% to 50% in each voltage range
 - Output voltage range selection
 - Data log read: SKU, S/N, lot code, hours of operation, FW rev., fault events: power failure, transients (short or surge), thermal events
- Non-linear 0-10V dimming profile with dim-to-off (10V to 9.1V=100%, 1.5V to 0.6V=1%, <0.6V=dim-to-off)
- Auxiliary output 12 V/100 mA
- Dual output voltage range
- UL Class P
- IP66-rated case with silicone-based potting
- Surge protection:
 - Combination wave IEC61000-4-5: 6 kV line to line/6 kV line to earth
 - 2.5 kV ring wave: ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A
- 90° C maximum case hot spot temperature
- Complies with ENERGY STAR® luminaire specification and DLC (Design Light Consortium®) technical requirements

PROGRAMMING

- Dual output voltage range selection
- Serial port programming
 - Current: 100% to 50% in each voltage range
 - Data log read: SKU, S/N, lot code, hours of operation, FW revision, fault events: power failure, transients (short or surge), thermal

APPLICATIONS

- Street Lights
- Industrial LED Lighting
- Wide-area Lighting
- Outdoor lighting



CHINA Operations

tel: +86-756-6266298
No. 8 Pingdong Road 2
Zhuhai, Guangdong, China 519060

www.erp-power.com

SaveEnergy@erp-power.com

USA Headquarters

tel: +1-805-517-1300
893 Patriot Drive, Suite E
Moorpark, CA 93021, USA

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Power Supplies](#) category:

Click to view products by [ERP Power](#) manufacturer:

Other Similar products are found below :

[ESS015W-1000-12](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [79534](#) [79535](#)
[EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [ESM060W-1400-42](#)
[PDA080B-1A0G](#) [ESS010W-0500-12](#) [PDA150B-S1A5G](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [EUD-150S350DVA](#) [LWA320-C420-](#)
[ARK-B](#) [HVG-240-48AB](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [ELG-240-C1400AB](#) [EUK-150S105DV](#) [BXCS-12Z-N2P-B1-A](#) [BXPR-WN-01-A](#)
[LN1224CV](#) [BXCS-12D-N2P-01-A](#) [BXCS-12W-N2P-01-A](#) [HBG-160-24AB](#) [980100001200394](#) [980060001200376](#) [LC 14W 250-350MA](#)
[FLEXC R ADV2](#) [LC 24W 500-600MA FLEXC R ADV2](#) [LC 36W 850-900MA FLEXC R ADV2](#) [LC 50W 200-350ML 170V FLEXC LP](#)
[SNC4](#) [LC 25W 200-350ML 70V FLEXC LP SNC4](#) [LC 35W 200-350ML 121V FLEXC LP SNC4](#) [LCBI 10W 350MA PHASE-CUT/1-10V LP](#)
[LC 13W 300MA FIXC C SNC](#) [LC 10W 250MA FIXC SC SNC2](#) [LC 35W 800MA FIXC SR ADV2](#) [LC 38W 900MA FIXC SR ADV2](#) [LC](#)
[34W 800MA FIXC SC ADV2](#) [LC 44W 1050MA FIXC SC ADV2](#) [LC 38W 900MA 42V FIXC SRL ADV2](#)