


## High Performance Programmable CC LED Driver with Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V)

Nominal Input Voltage	Max. Output Power	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 & 277 Vac	50 W	up to 90% typical	90°C (measured at the hot spot)	< 20%	> 0.9	Programmable Forward-Phase, Reverse-Phase & 0 - 10V	1 - 100% (% of Iout)	300 ms typical



**Side Leads:**  
L 103.5 \* W 26.2 \* H 23.85 mm  
(L 4.07 \* W 1.03 \* H 0.94 in.)

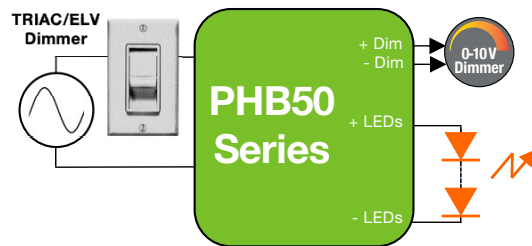

**Bottom Leads with Studs:**  
"-S" Suffix  
L 103.5 \* W 26.2 \* H 23.85 mm  
(L 4.07 \* W 1.03 \* H 0.94 in.)

Part Number	Nominal Input Voltage (Vac)	Max Output Power (W)	Iout (mA)	Vout Min. (Vdc)	Vout Nom. (Vdc)	Vout Max. (Vdc)
<b>120 to 277 VAC NOMINAL INPUT VOLTAGE</b>						
<b>PHB30W</b>						
PHB30W-0500-42	120 & 277	21.0	250 to 500	28	37.8	42
PHB30W-0700-42	120 & 277	29.4	350 to 700	28	37.8	42
<b>PHB50W</b>						
PHB50W-0850-56	120 & 277	47.6	425 to 850	38	50.4	56
PHB50W-1200-42	120 & 277	50.4	600 to 1200	28	37.8	42
<b>120 to 277 VAC NOMINAL INPUT VOLTAGE</b>						
<b>PHB30W</b>						
PHB30W-0500-42-S	120 & 277	21.0	250 to 500	28	37.8	42
PHB30W-0700-42-S	120 & 277	29.4	350 to 700	28	37.8	42
<b>PHB50W</b>						
PHB50W-0850-56-S	120 & 277	47.6	425 to 850	38	50.4	56
PHB50W-1200-42-S	120 & 277	50.4	600 to 1200	28	37.8	42

Suffix for the different case options:  
 • No suffix: Side leads  
 • "-S": Bottom lead exit with studs

### FEATURES

- Fully programmable TRIAC & ELV conduction angles with turn-on and turn-off
- Fully programmable and selectable 0-10V dimming profiles
- Dimming range of 100%-1% on TRIAC, ELV and 0-10V dimmers
- Ripple < 10% @ 20% & 100% load for TRIAC, ELV & 0-10V
- Turn-on
  - ELV @ 1% Iout
  - 0-10V @ 1% Iout
- UL Class P
- Class 2 & II power supply
- Lifetime: 50,000 hours @ Tc ≤ 75° C
- 90° C maximum case hot spot temperature
- IP20-rated case with silicone-based potting
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®), CA Title 24, and NEMA SSL-1-2016 technical requirements

### PROGRAMMING

- Current: 100% to 50% in each voltage range
- Data log read: SKU, S/N, lot code, hours of operation, FW revision, power cycles
- Fully programmable and selectable 0-10V dimming profiles: Non-linear with dim-to-off, Logarithmic, Non-Linear without dim-to-off.
- Fully programmable TRIAC & ELV conduction angles with turn-on and turn-off



#### CHINA Operations

tel: +86-756-6266298  
No. 8 Pingdong Road 2  
Zhuhai, Guangdong, China 519060

www.erp-power.com

Rev. 25 March 2020

#### USA Headquarters

tel: +1-805-517-1300  
893 Patriot Drive, Suite E  
Moorpark, CA 93021, USA

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Power Supplies](#) category:*

*Click to view products by [ERP Power](#) manufacturer:*

Other Similar products are found below :

[ESS015W-1000-12](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [79534](#) [79535](#)  
[EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [ESM060W-1400-42](#)  
[PDA080B-1A0G](#) [ESS010W-0500-12](#) [PDA150B-S1A5G](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [EUD-150S350DVA](#) [LWA320-C420-](#)  
[ARK-B](#) [HVG-240-48AB](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [ELG-240-C1400AB](#) [EUK-150S105DV](#) [BXCS-12Z-N2P-B1-A](#) [BXPR-WN-01-A](#)  
[LN1224CV](#) [BXCS-12D-N2P-01-A](#) [BXCS-12W-N2P-01-A](#) [HBG-160-24AB](#) [980100001200394](#) [980060001200376](#) [LC 14W 250-350MA](#)  
[FLEXC R ADV2](#) [LC 24W 500-600MA FLEXC R ADV2](#) [LC 36W 850-900MA FLEXC R ADV2](#) [LC 50W 200-350ML 170V FLEXC LP](#)  
[SNC4](#) [LC 25W 200-350ML 70V FLEXC LP SNC4](#) [LC 35W 200-350ML 121V FLEXC LP SNC4](#) [LCBI 10W 350MA PHASE-CUT/1-10V LP](#)  
[LC 13W 300MA FIXC C SNC](#) [LC 10W 250MA FIXC SC SNC2](#) [LC 35W 800MA FIXC SR ADV2](#) [LC 38W 900MA FIXC SR ADV2](#) [LC](#)  
[34W 800MA FIXC SC ADV2](#) [LC 44W 1050MA FIXC SC ADV2](#) [LC 38W 900MA 42V FIXC SRL ADV2](#)