


Low Profile Under-Cabinet LED Driver

Input Voltage	Max. Output Power	Output Voltage	Output Current	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 Vac nominal	17.3 W	11 to 36 Vdc	120 to 480 mA CC	up to 87% typical	90°C (measured at the hot spot)	≤ 20%	≥ 0.9	TRIAC & ELV	1 - 100% (% of Iout)	200 ms

CC: Constant Current

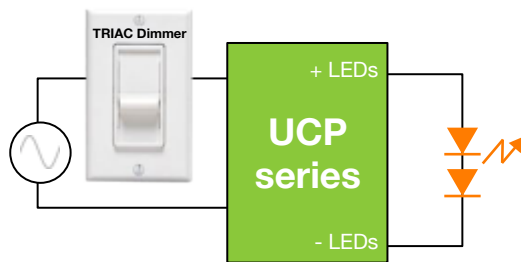

ERP Part Number	Nominal Input Voltage (Vac)	Max Output Power (W)	Iout (mA)	Output Voltage Range (Vdc)	
				Min	Max
UCP05: up to 5 W					
UCP05U-120-36	120	4.3	120	28	36
UCP10: >5 to 10 W					
UCP10U-350-16	120	5.6	350	11	16
UCP10U-240-36	120	8.6	240	28	36
UCP15: >10 to 15 W					
UCP15U-350-30	120	10.5	350	24	30
UCP15U-360-36	120	13.0	360	28	36
UCP20: >15 to 20 W					
UCP20U-480-36	120	17.3	480	28	36

FEATURES

- Low profile of 16.5 mm
- Compatible with industry standard TRIAC (forward-phase or leading-edge) and ELV (reverse-phase or trailing-edge)
- 1% to 100% dimmable output
- Very short startup time of 200 ms
- 120 Vac nominal input
- Non-Class 2 (non-isolated)
- High efficiency: 87%
- Protections: output open load, over-current and short-circuit (hiccup), and over-temperature with auto recovery
- Conducted and radiated EMI: compliant with FCC CFR Title 47 Part 15 Class B
- Complies with ENERGY STAR®, DLC (DesignLight Consortium®) technical requirements
- 90°C maximum case temperature
- Lifetime: 50,000 hours at 70°C case temperature

APPLICATIONS

- Under-cabinet lighting



CHINA Operations

tel: +86-756-6266298
No. 8 Pingdong Road 2
Zhuhai, Guangdong, China 519060

www.erp-power.com

SaveEnergy@erp-power.com

USA Headquarters

tel: +1-805-517-1300
893 Patriot Drive, Suite E
Moorpark, CA 93021, USA

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Power Supplies](#) category:

Click to view products by [ERP Power](#) manufacturer:

Other Similar products are found below :

[ESS015W-1000-12](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [79534](#) [79535](#)
[EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [ESM060W-1400-42](#)
[PDA080B-1A0G](#) [ESS010W-0500-12](#) [PDA150B-S1A5G](#) [SLM140W-1.05-130-ZA](#) [ESS015W-0700-18](#) [EUD-150S350DVA](#) [LWA320-C420-](#)
[ARK-B](#) [HVG-240-48AB](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [ELG-240-C1400AB](#) [EUK-150S105DV](#) [BXCS-12Z-N2P-B1-A](#) [BXPR-WN-01-A](#)
[LN1224CV](#) [BXCS-12D-N2P-01-A](#) [BXCS-12W-N2P-01-A](#) [HBG-160-24AB](#) [980100001200394](#) [980060001200376](#) [LC 14W 250-350MA](#)
[FLEXC R ADV2](#) [LC 24W 500-600MA FLEXC R ADV2](#) [LC 36W 850-900MA FLEXC R ADV2](#) [LC 50W 200-350ML 170V FLEXC LP](#)
[SNC4](#) [LC 25W 200-350ML 70V FLEXC LP SNC4](#) [LC 35W 200-350ML 121V FLEXC LP SNC4](#) [LCBI 10W 350MA PHASE-CUT/1-10V LP](#)
[LC 13W 300MA FIXC C SNC](#) [LC 10W 250MA FIXC SC SNC2](#) [LC 35W 800MA FIXC SR ADV2](#) [LC 38W 900MA FIXC SR ADV2](#) [LC](#)
[34W 800MA FIXC SC ADV2](#) [LC 44W 1050MA FIXC SC ADV2](#) [LC 38W 900MA 42V FIXC SRL ADV2](#)