

Ø 4,0 x 10,5 mm

Version: lang-lang / long-long



**Spannung** 250 V / (125V) **Strom** 10 A / (15A) **Typ** Axial  
**Voltage** **Current** **Type**



**Spezifikation / Specification:**

Anschluss / Connection:

Rundstifte (lang-lang),  
 Oberfläche verzinnt, steckbar und lötlbar /  
 Round pins (long-long),  
 Surface tin-plated, pluggable and solderable

(kurz-lang-Version: ESKA 776.000) /  
 (short-lang-version: ESKA 776.000)

Max. Unterbrechungsstrom /  
 max. interrupting current

15 A @ 250V AC

Max. Transienter Überlastsstrom /  
 max. Transient overload current

3 ms @ 150 A DC

Verpackungsmöglichkeiten / Packing options:

500 St. = lose geschüttet in Polybeutel /  
 500 pcs. = bulk in plastic bag  
 5.000 St. = auf Rolle gegurtet  
 (= z.B.: 777.072G) /  
 5.000 pcs. = taped and reeled  
 (= e.g.: 777.072G)


**Bemessungswerte / Ratings:**

| Art. No.              | I <sub>N</sub> | U <sub>N</sub> [V] | T <sub>N</sub> [°C] | T <sub>H</sub> [°C] | T <sub>max</sub> (VDE) [°C] | UR | cUR | VDE | TÜV | PSE | CCC | KC |
|-----------------------|----------------|--------------------|---------------------|---------------------|-----------------------------|----|-----|-----|-----|-----|-----|----|
| 777.072               | 10 A           | 250                | 72 (+2°C / -2°C)    | 57                  | 200                         | ●  | ●   | ●   | ●   | ●   | ●   | ●  |
| 777.077               | 10 A           | 250                | 77 (+0°C / -4°C)    | 62                  | 200                         | ●  | ●   | ●   | ●   | ●   | ●   | ●  |
| 777.084 <sup>1)</sup> | 10 A           | 250                | 84 (+0°C / -5°C)    | 69                  | 180                         | ●  | ●   | ●   | ●   | ●   | ●   | ●  |
| 777.093 <sup>1)</sup> | 10 A           | 250                | 93 (+0°C / -5°C)    | 78                  | 180                         | ●  | ●   | ●   | ●   | ●   | ●   | ●  |
| 777.098               | 10 A           | 250                | 98 (+2°C / -2°C)    | 83                  | 190                         | ●  | ●   | ●   | ●   | ●   | ●   | ●  |
| 777.110 <sup>1)</sup> | 10 A           | 250                | 109 (+0°C / -5°C)   | 94                  | 190                         | ●  | ●   | ●   | ●   | ●   | ●   | ●  |
| 777.121 <sup>1)</sup> | 10 A           | 250                | 121 (+0°C / -5°C)   | 106                 | 200                         | ●  | ●   | ●   | ●   | ●   | ●   | ●  |
| 777.128               | 10 A           | 250                | 128 (+0°C / -5°C)   | 113                 | 200                         | ●  | ●   | ●   | ●   | ●   | ●   | ●  |
| 777.144 <sup>1)</sup> | 10 A           | 250                | 144 (+0°C / -5°C)   | 127                 | 260                         | ●  | ●   | ●   | ●   | ●   | ●   | ●  |
| 777.152               | 10 A           | 250                | 152 (+0°C / -4°C)   | 137                 | 270                         | ●  | ●   | ●   | ●   | ●   | ●   | ●  |
| 777.167               | 10 A           | 250                | 167 (+0°C / -4°C)   | 152                 | 280                         | ●  | ●   | ●   | ●   | ●   | ●   | ●  |
| 777.184               | 10 A           | 250                | 184 (+0°C / -6°C)   | 169                 | 220                         | ●  | ●   | ●   | ●   | ●   | ●   | ●  |
| 777.192               | 10 A           | 250                | 192 (+3°C / -3°C)   | 177                 | 300                         |    |     |     |     | ●   |     | ●  |
| 777.195               | 10 A           | 250                | 195 (+3°C / -6°C)   | 180                 | 300                         | ●  | ●   | ●   | ●   | ●   | ●   | ●  |
| 777.216 <sup>1)</sup> | 10 A           | 250                | 216 (+0°C / -6°C)   | 200                 | 370                         | ●  | ●   | ●   | ●   | ●   | ●   | ●  |
| 777.229 <sup>1)</sup> | 10 A           | 250                | 228 (+0°C / -6°C)   | 200                 | 370                         | ●  | ●   | ●   | ●   | ●   | ●   | ●  |
| 777.240 <sup>1)</sup> | 10 A           | 250                | 240 (+0°C / -6°C)   | 200                 | 370                         | ●  | ●   | ●   | ●   | ●   | ●   | ●  |

<sup>1)</sup> Dual Ratings (UL approved): - 10A @ 250V and 15A @ 125V

**Legende / Caption:**

- I<sub>N</sub> = Bemessungsstrom / Rated current
- U<sub>N</sub> = Bemessungsspannung / Rated voltage
- T<sub>N</sub> = Bemessungstemperatur / Rated functioning temp.
- T<sub>H</sub> = Haltemperatur / Holding temperature
- T<sub>max</sub> = max. Grenztemperatur / max. temp. limit

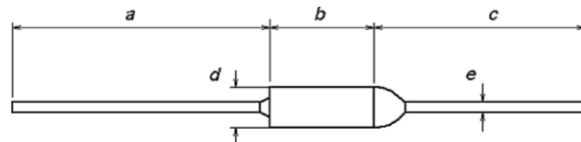

| dimension(mm) | a         | b         | c         | d         | e   |
|---------------|-----------|-----------|-----------|-----------|-----|
| long          | 35.0 ±3.0 | 10.5 ±0.5 | 35.0 ±3.0 | 4.0 ±0.05 | 1.0 |
| medium        | 22.0 ±3.0 | 10.5 ±0.5 | 25.0 ±3.0 | 4.0 ±0.05 | 1.0 |
| short         | 35.0 ±3.0 | 10.5 ±0.5 | 18.0 ±3.0 | 4.0 ±0.05 | 1.0 |
| special       | 65.0 ±1.0 | 10.5 ±0.5 | 40.0 ±1.0 | 4.0 ±0.05 | 1.0 |

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Eska manufacturer](#):*

Other Similar products are found below :

[1038128](#) [1038820](#) [1038823](#) [1038825](#) [1038826](#) [1038827](#) [1038828](#) [1038830](#) [121.000G](#) [220.041](#) [340.017](#) [340017-80V](#) [340020-80V](#) [340022-58V](#) [340022-80V](#) [340023-58V](#) [340023-80V](#) [340024-58V](#) [340024-80V](#) [340026-80V](#) [340027-58V](#) [340027-80V](#) [340029-58V](#) [340029-80V](#) [340031-58V](#) [340032-58V](#) [340032-80V](#) [340033-58V](#) [340033-80V](#) [340034-58V](#) [340034-80V](#) [340035-58V](#) [340222](#) [340223](#) [340224](#) [340226](#) [340227](#) [340229](#) [340231](#) [340232](#) [340233](#) [340234](#) [340235](#) [340631](#) [340633](#) [340635](#) [340637](#) [340639](#) [340640](#) [340641](#)