



ESQT-125-02-L-Q-465

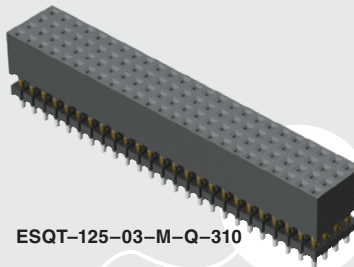

ESQT-125-03-M-Q-310

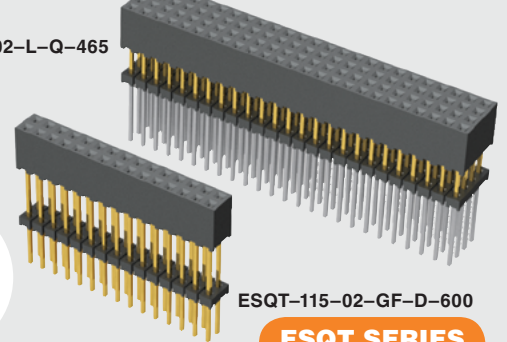

ESQT-115-02-GF-D-600

**ESQT SERIES**

**(2.00 mm) .0787"**

# FLEXIBLE ELEVATED SOCKET STRIPS

## SPECIFICATIONS

For complete specifications see [www.samtec.com?ESQT](http://www.samtec.com?ESQT)

**Insulator Material:**

Black Liquid Crystal Polymer

**Contact Material:**

Phosphor Bronze

**Plating:**

Sn or Au over

50 μ" (1.27 μm) Ni

**Current Rating (ESQT/TMMH):**

4.5 A per pin

(2 pins powered)

**Operating Temp Range:**

-55 °C to +125 °C

**Insertion Depth:**

(2.62 mm) .103" to

(5.03 mm) .198" with

(0.38 mm) .015" wipe

**Max Cycles:**

100 with 10 μ" (0.25 μm) Au

**RoHS Compliant:**

Yes

**Lead-Free Solderable:**

Yes, for -S, -D & -Q


(Wave only for -T, -5 & -6)

**Board Mates:**


TMMH, TMM, MTMM, MMT, TW, LTMM, ZLTMM, ESQT, PTT, TSH, TMMS

**Cable Mates:**

TCMD

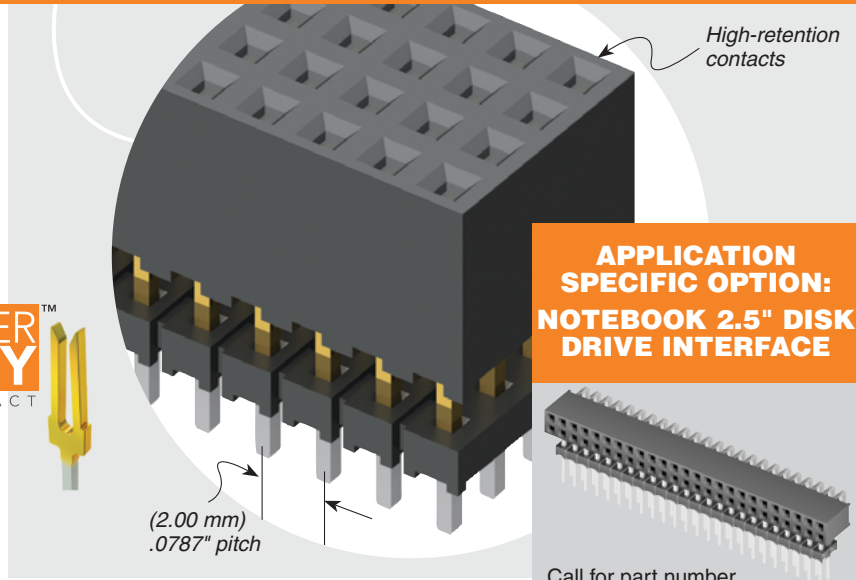

**APPLICATION SPECIFIC OPTION: NOTEBOOK 2.5" DISK DRIVE INTERFACE**



Call for part number.

## RECOGNITIONS

For complete scope of recognitions see [www.samtec.com/quality](http://www.samtec.com/quality)



**Note:**  
This Series is non-standard, non-returnable.

## Other Solutions

**Surface Mount**  
See SQW and TLE Series.



**Low Profile**  
See CLT Series.

**High Reliability**  
See SMM Series.


**Right-Angle**  
See SQW Series.

**PC/104-Plus™ Sockets**  
See ESQT-368 and PTHF Series.

ESQT	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	BODY HEIGHT	OTHER OPTION
02 thru 50			Specify LEAD STYLE from chart	<p><b>-F</b> = Gold flash on contact, Matte Tin on tail</p> <p><b>-L</b> = 10 μ" (0.25 μm) Gold on contact, Matte Tin on tail</p> <p><b>-M</b> = 20 μ" (0.51 μm) Gold on contact, Matte Tin on tail</p> <p><b>-GF</b> = 15 μ" (0.38 μm) Gold on contact, Gold flash on tail (Recommended for self-nesting) (-02 lead style only)</p>	<p><b>-S</b> = Single Row</p> <p><b>-D</b> = Double Row</p> <p><b>-T</b> = Triple Row</p> <p><b>-Q</b> = Quad Row</p> <p><b>-5</b> = Five Row</p> <p><b>-6</b> = Six Row</p>	<p><b>"XXX"</b> = Body Height (in inches)</p> <p>(7.87 mm) .310" minimum for -S, -D, -Q</p> <p>(9.53 mm) .375" minimum for -T, -5, -6</p>	<p><b>"XXX"</b> = Polarized Position (Indicate position number)</p>

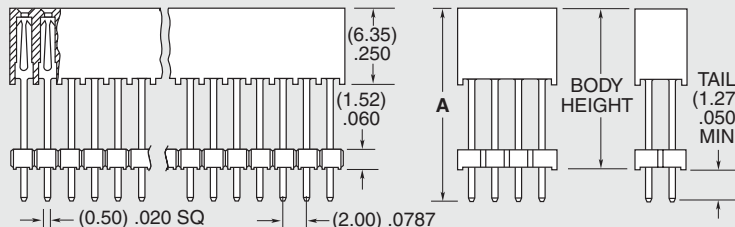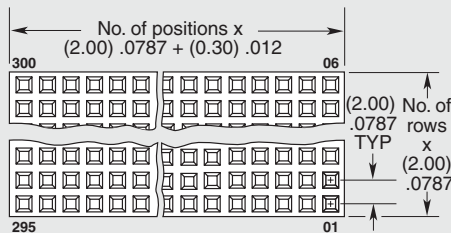

## OTHER SOLUTIONS



Paste In Hole (PIH) processing. Contact Samtec ASP Group. (Not recommended for stack through applications)

LEAD STYLE	A	MAX TAIL	MAX BODY HEIGHT
-02	(21.59) .850	(13.72) .540	(20.32) .800
-03	(11.63) .458	(3.76) .148	(10.36) .408

Due to technical progress, all designs, specifications and components are subject to change without notice.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Samtec](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65781-018](#) [65781-047](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#)