## SHEET 1 OF 1 SWITCH FUNCTION POS. 1 POS. 2 POS. 3 ON NONE ON 2-3, 5-6 OPEN 2-1, 5-4


## NOTE:

1. ALL DIMENSIONS IN MM [INCH]

CIRCUIT: DPDT

- 2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
- 3. TERMINAL NUMBERS FOR REF ONLY
- ▲4. PLATING MATERIAL: SILVER
- 5. RATING: 5 AMPS W/RESITIVE LOAD @ 120VAC OR 28VDC 2 AMPS W/RESITIVE LOAD @ 250VAC
- 6. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYLCES
- AT FULL LOAD.
- 7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- 8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
- 9. OPERATING TEMP.: -30°C to 85°C
- 10. ▲ DENOTES CRITICAL PARAMETER.
- 11. 2002/95/EC (ROHS) COMPLIANT.
- 12. HARDWARE TO BE SHIPPED BULK:

T100011 - LOCK WASHER, QTY 1 T100015 - LOCK RING, QTY 1 T100000 - HEX NUT, QTY 2

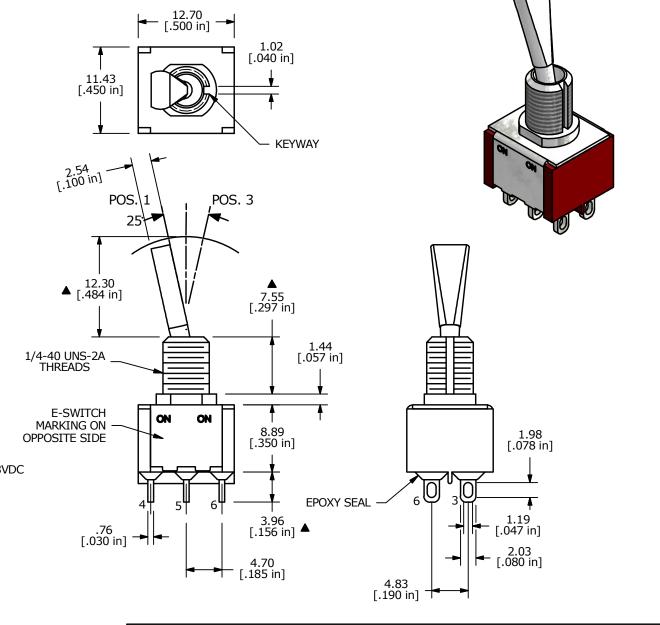

В	22354	UPDATED PIN NUMBERING AND ADDED FLATS	6/15/16	MJR	
Α	17103	RELEASED FOR PRODUCTION	3/15/07	TN	
REV	PCR NO	DESCRIPTION	DATE	BY	
THE INFORMATION CONTAINED IN THIS DOCLIMENT IS PROPRIETARY					

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETAR TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED TITLE 100DP1T6B11M1QEH

SCALE 2:1

DATE 3/15/2007

TN

DWG ST121017

REV B

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Toggle Switches category:

Click to view products by E-Switch manufacturer:

Other Similar products are found below:

8928K478 020017-13 60012L 6006L CS115W CS120W 637H/25 6663 7101SPDV30BE 7103SDV30BE 7105D 7108P3YAV2BE
71YY50282 7300K36 7301K38 7306K36 7310K36 7506K4 7592K6 7660K12 7691K14 7700K1 8396K108 8824K14 8828K13 8835K3
8858K44 PS83-121G 1-1825192-0 A201SCWZB04 A207SYCB04 A208J61ZQ0004 A221T1TCQ A232M1YCQ A323S1CWZQ
A423S1CWZG-M8 1201W 12156AX408 12147AGKX679 12246X778 12TW49-3D 130312 13037L 13001X AE101MD1W4B04
AE208SD1W4B04 MS24659-22D MS27407-5 1520230-9 1520231-1