
SHEET 1 OF 1 Ø3.81 9.60 [.150 in] [.378 in] .79 [.031 in] Ø11.91 Ø11.91 1.65 [.469 in]

PANEL MOUNTING

▲ SWI	▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3	
	데]	4	
ON	NONE	ON	
2-3	N/A	2-1	


[.065 in]



NOTE:

- 1. ALL DIMENSIONS IN MM [INCH]
- 2. GENERAL TOLERANCE: $X.X = \pm 0.4$ $X.XX = \pm 0.25$
- 3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
 - 5. RATING: 5 AMPS @ 120VAC (or 28 VDC) 2 AMP @ 250VAC
 - 6. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
 - 7. INSULATION RESISTANCE: 1,000 M Ω MIN.
 - 8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
 - 9. OPERATING TEMP.: -30°C to 85°C
- 10. ▲ DENOTES CRITICAL PARAMETER.
- 11. 2011/65/EU (ROHS) COMPLIANT
- 12. HARDWARE TO BE SHIPPED BULK:

T100012 - LOCK WASHER, QTY 1 T100003 - LOCK RING, QTY 1 T100004 - HEX NUT, QTY 2

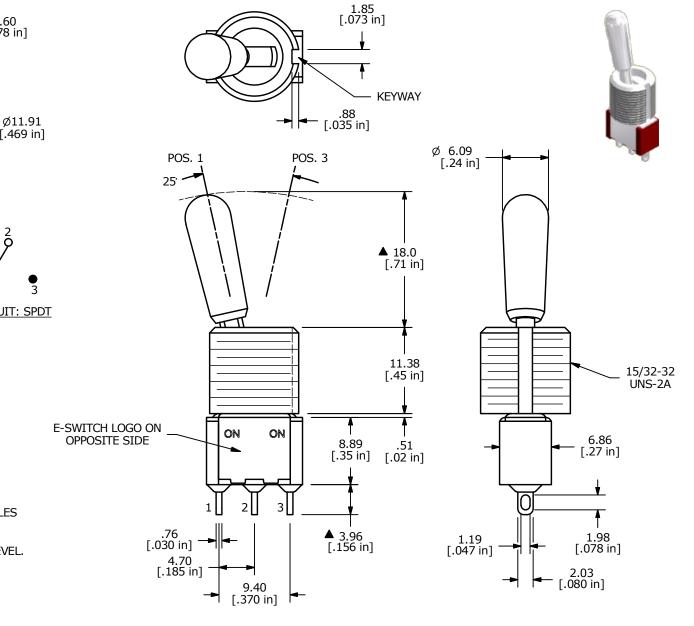

С	23063	REVISED AND REDRAWN	10/27/17	MW			
REV	PCR NO DESCRIPTION		DATE	BY			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY							

TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

▼					
TITLE 100S	P1T8B13M1QEH				
SCALE 2:1	DATE 10/27/2017	DR MW	DWG ST111027		REV C

€ SWITCH

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Toggle Switches category:

Click to view products by E-Switch manufacturer:

Other Similar products are found below:

8928K478 020017-13 60012L 6006L CS115W CS120W 637H/25 6663 7101SPDV30BE 7103SDV30BE 7105D 7108P3YAV2BE
71YY50282 7300K36 7301K38 7306K36 7310K36 7506K4 7592K6 7660K12 7691K14 7700K1 8396K108 8824K14 8828K13 8835K3
8858K44 PS83-121G 1-1825192-0 A201SCWZB04 A207SYCB04 A208J61ZQ0004 A221T1TCQ A232M1YCQ A323S1CWZQ
A423S1CWZG-M8 1201W 12156AX408 12147AGKX679 12246X778 12TW49-3D 130312 13037L 13001X AE101MD1W4B04
AE208SD1W4B04 MS24659-22D MS27407-5 1520230-9 1520231-1