

SHEET 1 OF 1



PANEL MOUNTING

SWITCH FUNCTION POS. 1 POS. 2 POS. 3 ON OFF ON 2-3, 5-6 **OPEN** 2-1, 5-4





CIRCUIT: DPDT


NOTE:

- 1. ALL DIMENSIONS IN MM [INCH]
- 2. GENERAL TOLERANCE: X.X=±0.4 $X.XX = \pm 0.25$
- 3. TERMINAL NUMBERS FOR REF ONLY
- 4. PLATING MATERIAL: SILVER
- ▲5. RATING: 3AMPS @120VAC OR 28VDC, 1AMP @250VAC
- 6. ELECTRIC LIFE: 30,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- 7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- 8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
- 9. OPERATING TEMP.: -30°C to 85°C
- 10. ▲ DENOTES CRITICAL PARAMETER.
- 11. 2002/95/EC (ROHS) COMPLIANT
- ▲12. HARDWARE TO BE SUPPLIED IN BULK


T200000-LOCK WASHER QTY. 1 T200002-LOCK RING QTY. 1 T200001-HEX NUT QTY. 2








ISOMETRIC

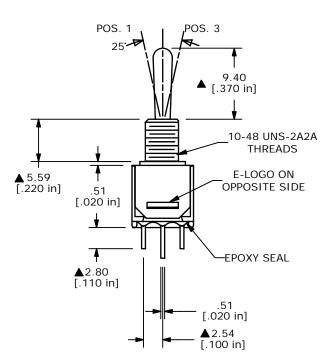

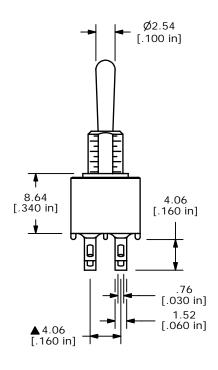

Α	17510	RELEASED FOR PRODUCTION	7/27/07	BF		
REV	PCR NO	DESCRIPTION	DATE	BY		
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY						

TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

	(₽ €	SWITC	SH-	
TITLE 200MDP3	T1B1M1QEH			
SCALE	DATE	DR	DWG	REV

7/27/2007 2:1 ST222005 BF Α

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Toggle Switches category:

Click to view products by E-Switch manufacturer:

Other Similar products are found below:

8928K478 020017-13 60012L 6006L CS115W CS120W 637H/25 6663 7101SPDV30BE 7103SDV30BE 7105D 7108P3YAV2BE
71YY50282 7300K36 7301K38 7306K36 7310K36 7506K4 7592K6 7660K12 7691K14 7700K1 8396K108 8824K14 8828K13 8835K3
8858K44 PS83-121G 1-1825192-0 A201SCWZB04 A207SYCB04 A208J61ZQ0004 A221T1TCQ A232M1YCQ A323S1CWZQ
A423S1CWZG-M8 1201W 12156AX408 12147AGKX679 12246X778 12TW49-3D 130312 13037L 13001X AE101MD1W4B04
AE208SD1W4B04 MS24659-22D MS27407-5 1520230-9 1520231-1