

126 [3.20]

ò


Short

Flush

0.287 [7.30]

Long

E+SWITCH[®]

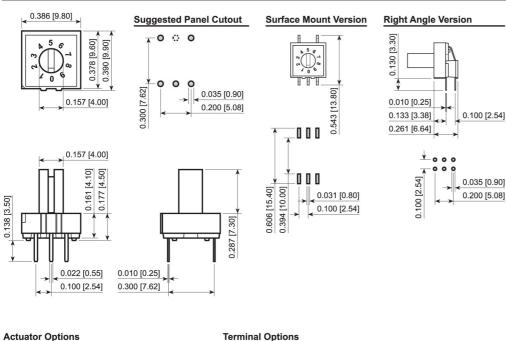

8

0.300 [7.62]

2

0.035 [0.90]

0.200 [5.08]

2x3

1 C 4

8 C 2

1 C 4

62]

2

0.300

0.035 [0.90]

3x3

0.200 [5.08]

FEATURES:

 Through Hole, Right Angle, and SMT Option • Tape and Reel Packaging

Ro

S

SPECIFICATIONS:

RATING: 25mA 24VDC (Switching) 100mA 50VDC (Non-switching) TEMPERATURE: -25°C to 80°C (Operating) -40°C to 85°C (Storage) ELECTRICAL LIFE: 15,000 Cycles DIELECTRIC STRENGTH: 250VAC for 1 Minute INSULATION RESISTANCE: $100M\Omega$ Min. at 250VDC Contact Resistance: $100m\Omega$ Max. CAPACITANCE: 5pF VIBRATION TEST: Mil-Std-202F Method 201A SHOCK TEST: Mil-Std-202F Method 213B **OPERATION FORCE:** 200gf•cm

MATERIALS:

ĉ

0.035 [0.90]

4x1

0.200 [5.08]

8421 0000

62]

0.300 [7.6

BASE: Nylon, UL94 V-0 Cover: Nylon, UL94 V-0 ACTUATOR: Liquid Crystal Polymer, UL94 V-0 CONTACTS: Gold Over Nickel Plated Copper TERMINALS: Gold Plated Brass



DR3MH-10R



Series



DR2-10R

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Rotary Switches category:

Click to view products by E-Switch manufacturer:

Other Similar products are found below :

57HS22-02-2-06N 57M22-02B16N 57M22-09A16N M3786/4-0881 M3786/4-3267 M3786/4-5568 M3786/4-6029 71ESF30-05204N MC06L1NCGF 84986-26 9003K2C003GA PLR3251 PLR3262 PS3 A0142M2SP A029303 R2AA4455NNNN R2BB4455NNNN DR75-AMSF-10R-B 1703.3201 HW1MS-0202-101 24002-03S A029101 ACSNO-129-YB-C1014 ACSNO-134-RR-YB-C1005 ACSNO-353-SB-C3016 1825537-4 T505 T505E 24005-03N H10207RR01Q M3786/39-4ZC M3786/4-0002 M3786/4-0630 M3786/4-1028L M3786/4-1233L M3786/4-3044 M3786/4-3129 M3786/4-5008L M3786/4-5256 MC6CX1A502X009 42HS36-01-1-06N 42P36-03B10S 44MBS60-04-2-03N 44MG90-02-1-02N 50KMT90-01-2-02N 51A22-01-1-16S 51CDP30-01PAJN 51KSP30-01D04N 51P30-01B12N