

# SERIES EG1300 SWITCHES



## SLIDE SWITCHES



**FEATURES & BENEFITS**  
Tape & Reel Packaging  
3-position

**APPLICATIONS / MARKETS**  
Computer Servers/peripherals  
Consumer electronics  
Instrumentation  
Test & measurement

### MECHANICAL SPECIFICATIONS

Mechanical Life:	10,000 cycles
Force:	200 +/- 150 gf to center position 150 +/-100 gf from center position
Travel:	1.5 +/- 0.1mm each position





### ELECTRICAL SPECIFICATIONS

Electrical Life:	10,000 cycles
Contact Rating:	300mA @ 4VDC
Contact Resistance:	70mΩ (initial max)
Insulation Resistance:	100MΩ (Min @ 100VDC)
Dielectric Strength:	100VAC

### ENVIRONMENTAL SPECIFICATIONS

Operating Temperature:	-10°C to +60°C
Storage Temperature:	-20°C to +80°C

### HOW TO ORDER:

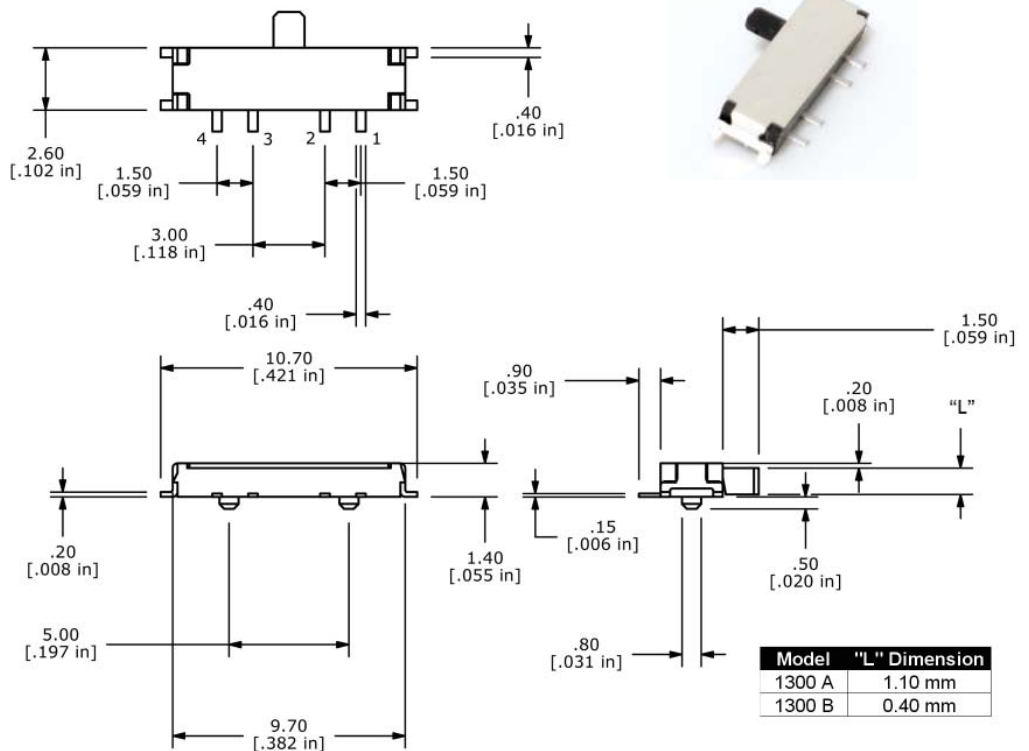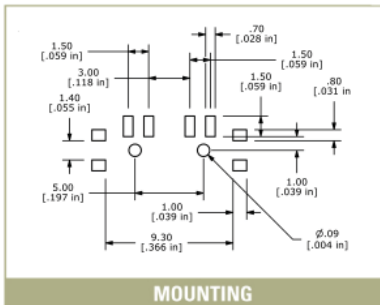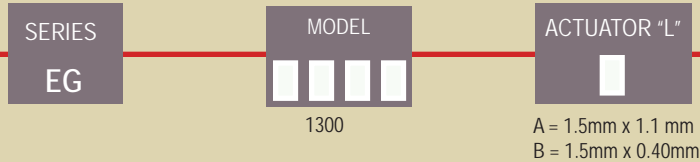

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Slide Switches](#) category:*

*Click to view products by [E-Switch](#) manufacturer:*

Other Similar products are found below :

[6-1437581-1](#) [M43R](#) [MHS123K15D](#) [MHSS1104A](#) [MMD](#) [GH49S010001](#) [GH49WW00001](#) [1437576-8](#) [EPS1PC1](#) [1825074-1](#) [1825160-3](#)  
[1825167-2](#) [25139NLDB](#) [25436NLDB](#) [25449NAH](#) [25536NA](#) [L101011ML04B](#) [SLB1240R45](#) [SLSA12004](#) [1825078-1](#) [1825080-4](#) [1825081-1](#)  
[1825269-1](#) [1825270-2](#) [STS141RA04](#) [T2215BEN506](#) [GF-124-0204](#) [GH46P000001](#) [GH46W000001](#) [GH49P010001](#) [25339NA](#) [25436NLDH](#)  
[CST91246FK](#) [TG36P000000](#) [TG36P000050](#) [47227LFE](#) [49331L](#) [MHSS1105A](#) [50208L](#) [HW4S-5LF22N3](#) [L202091MS02Q](#) [4-1437581-7](#)  
[48BFSP3M2QT](#) [49329L](#) [1101M1S3ZB8E2](#) [1-1437581-1](#) [EG1218REDACTUATOR](#) [TG39W000000](#) [1825075-1](#) [TG36WS80065](#)