
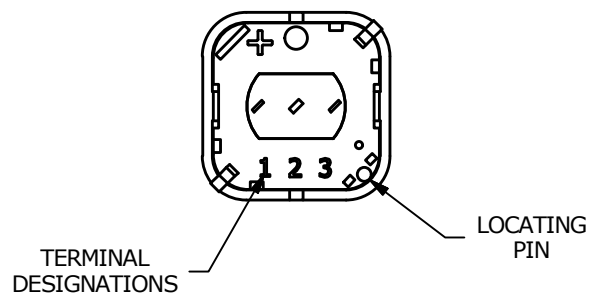


▲ SCHEMATIC  
DUAL ACTION

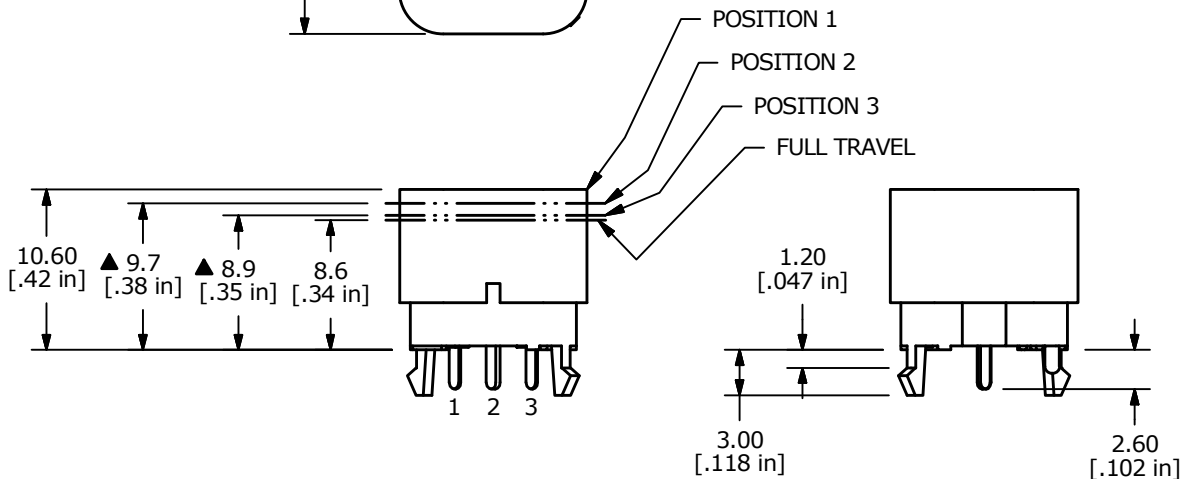

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X ± 0.4  
X.XX ± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY
4. RATING: 30mA @ 28VDC
- ▲ 5. OPERATING FORCE:  
POSITION 2 OPERATING POINT: 600 ± 100gf  
POSITION 3 OPERATING POINT: 1150 ± 150gf  
FULL TRAVEL: 8.6mm
6. ELECTRICAL LIFE: 20,000 CYCLES
7. ▲ DENOTES CRITICAL PARAMETER
8. CONTACT MATERIAL: SILVER
9. 2002/95/EC (RoHS) COMPLIANT

C	22430	update Note 4	8/9/16	MW
B	22331	update schmatic and switch positions	5/26/16	MW
A	22255	New Release	4/4/16	rc
REV	PCR NO	DESCRIPTION	DATE	BY



TITLE PB300DTQ				
SCALE	DATE	DR	DWG	REV
2:1	3/22/2016	rc	T003001	C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pushbutton Switches](#) category:*

*Click to view products by [E-Switch](#) manufacturer:*

Other Similar products are found below :

[8940K2012](#) [LW1L-M1C10V-A](#) [LW1L-M1C70-A](#) [LW2L-A1C20M-GD](#) [LW2L-M1C20M-A](#) [60324L](#) [M22-D-R-GB0/K11](#) [M7E-HRN2](#)  
[67021K512](#) [67081K512X](#) [701PB580](#) [7190K101](#) [7199K101](#) [810K12910](#) [810KSV30B](#) [MML21EA2ADK](#) [MML21KA3ABK](#)  
[MML23KA3AC05K-001](#) [MML23KW3AA01W](#) [8418K2](#) [8442K3](#) [8450K1](#) [860K11911T01A](#) [861901](#) [861K11911T01A07](#)  
[861K13810T00A14](#) [861K13911](#) [8646AB6X718UL](#) [8646ABUL](#) [9001KXRK](#) [907AYY100](#) [PMHD155A1](#) [95-313.000](#)  
[9533CD4+U574+U4922](#) [95-414.000](#) [99-450.837](#) [99-453.837](#) [PV3H2B0NN-341](#) [1203MRA](#) [A22NZBGANGA](#) [A22NZBMMNGA](#)  
[A22NZBNANGA](#) [A22NZMPATRA](#) [A2PMA1X03EC56](#) [A3A-5123-02](#) [A3A-7140](#) [A3A-7310](#) [A3A-7340](#) [A3U-TMW-A2C-5M](#) [A595](#)