




## NOTE:

- 1. ALL DIMENSIONS IN MM [INCH]
- 2. GENERAL TOLERANCE:  $X.X = \pm 0.4$  $X.XX = \pm 0.25$
- 3. TERMINAL NOS. FOR REF. ONLY
- 4. RATING: 2A @ 36VDC
- 5. CONTACT RESISTANCE:  $50m\Omega$  MAX. @ 1A 12VDC
- 6. INSULATION RESISTANCE: 1,000M $\Omega$  @ 500VDC
- 7. DIELECTRIC STRENGTH: 2,000VAC MIN. FOR 1 MINUTE
- 8. ELECTRICAL LIFE: 200,000 CYCLES
- 9. CONTACT MATERIAL: SILVER
- 10. OPERATING TEMPERATURE: -20°C TO 55°C
- 11. INGRESS PROTECTION: IP65
- 12. ▲ DENOTES CRITICAL PARAMETER
- 13. 2011/65/EU (ROHS) COMPLIANT
- 14. HARDWARE INCLUDED: HEX NUT AND O-RING (NOT SHOWN)

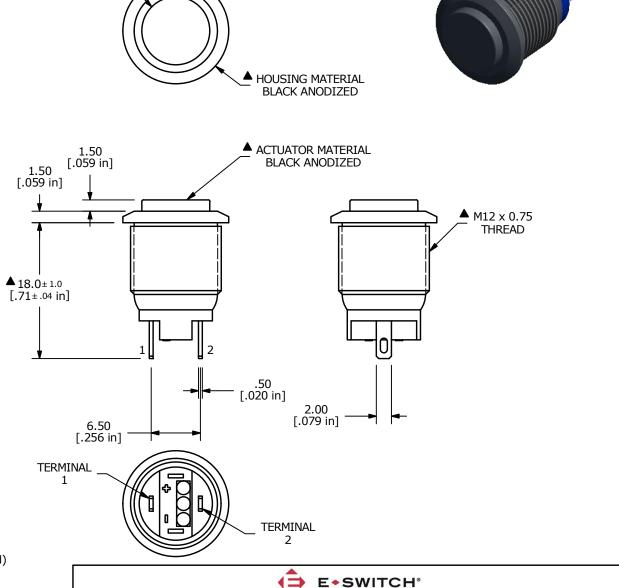

Ø14.00

[.551 in]

ı				
D	23191	UPDATED THREAD FROM0.5 TO0.75	1/29/18	MJR
С	22865	UPDATED RATING TO 2A @ 36VDC	5/26/17	MJR
REV	PCR NO	DESCRIPTION	DATE	BY
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETABLY				

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE PV0H24011

Ø9.00

[.354 in]

SCALE DATE 6/22/2016

DR MJR

52-PV0H24011

REV D

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pushbutton Switches category:

Click to view products by E-Switch manufacturer:

Other Similar products are found below:

8940K2012 LW1L-M1C10V-A LW1L-M1C70-A LW2L-A1C20M-GD LW2L-M1C20M-A 60324L M22-D-R-GB0/K11 M7E-HRN2 67021K512 67081K512X 701PB580 7190K101 7199K101 810K12910 810KSV30B MML21EA2ADK MML21KA3ABK MML23KA3AC05K-001 MML23KW3AA01W 8418K2 8442K3 8450K1 860K11911T01A 861901 861K11911T01A07 861K13810T00A14 861K13911 8646AB6X718UL 8646ABUL 9001KXRK 907AYY100 PMHD155A1 95-313.000 9533CD4+U574+U4922 95-414.000 99-450.837 99-453.837 PV3H2B0NN-341 1203MRA A22NZBGANGA A22NZBMMNGA A22NZBNANGA A22NZBMANGA A22NZBMA1X03EC56 A3A-5123-02 A3A-7140 A3A-7340 A3U-TMW-A2C-5M A595