


NOTE:

- 1. ALL DIMENSIONS IN MM [INCH]
- 2. GENERAL TOLERANCE: X.X = ±0.4

 $X.XX = \pm 0.25$

- 3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACT MATERIAL: SILVER
 - 5. RATING: 2A 48VDC
 - 6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
 - 7. INSULATION RESISTANCE: 1,000 M Ω MIN.
 - 8. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
 - 9. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
 - 10. OPERATING TEMP.: -20°C to 55°C
 - 11. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 12. HARDWARE SUPPLIED: O-RING AND HEXNUT
- ▲ 13. INGRESS RATING: IP67
- ▲ 14. LAMP VOLTAGE: 24V

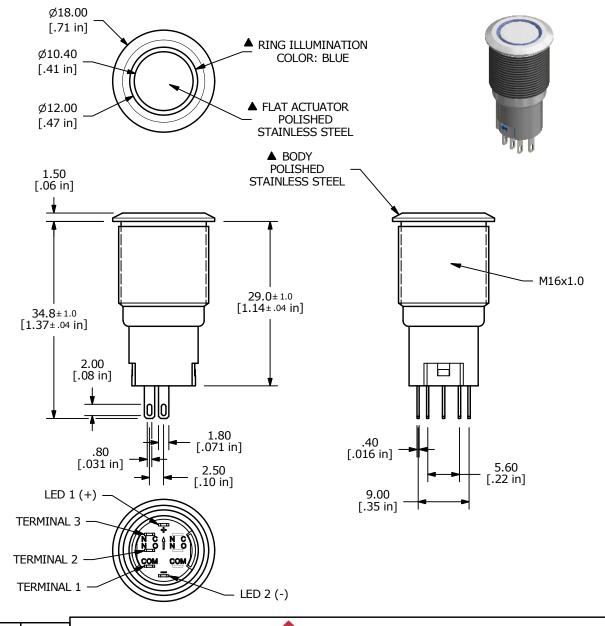

D	23617	update +/- Terminals	4/17/19	MW			
С	23360	UPDATED RATING TO 2A 48VDC	5/14/18	MJR			
В	22883	UPDATED RATING TO 1A 24VDC	6/9/17	MJR			
REV	PCR NO	DESCRIPTION	DATE	BY			

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH°									
TITLE	PV3V	VF2B0SS-345							
SCALE		DATE		ND.	DWC		DEV		

3:2 DATE 8/8/2014

EBP 52-PV3WF2B0SS345

D

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pushbutton Switches category:

Click to view products by E-Switch manufacturer:

Other Similar products are found below:

8940K2012 LW1L-M1C10V-A LW1L-M1C70-A LW2L-A1C20M-GD LW2L-M1C20M-A 60324L M22-D-R-GB0/K11 M7E-HRN2 67021K512 67081K512X 701PB580 7190K101 7199K101 810K12910 810KSV30B MML21EA2ADK MML21KA3ABK MML23KA3AC05K-001 MML23KW3AA01W 8418K2 8442K3 8450K1 860K11911T01A 861901 861K11911T01A07 861K13810T00A14 861K13911 8646AB6X718UL 8646ABUL 9001KXRK 907AYY100 PMHD155A1 95-313.000 9533CD4+U574+U4922 95-414.000 99-450.837 99-453.837 PV3H2B0NN-341 1203MRA A22NZBGANGA A22NZBMMNGA A22NZBNANGA A22NZBMANGA A22NZBMA1X03EC56 A3A-5123-02 A3A-7140 A3A-7340 A3U-TMW-A2C-5M A595