


## SHEET 1 OF 1

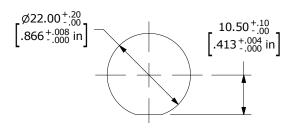


RECOMMENDED PANEL CUTOUT MAX. PANEL THICKNESS 12mm





## NOTE:

- 1. ALL DIMENSIONS IN MM [INCH]
- 2. GENERAL TOLERANCE:  $X.X = \pm 0.4$  $X.XX = \pm 0.25$
- 3. TERMINAL NUMBERS FOR REF. ONLY
- 4. RATING: 2A @ 48VDC
- ▲ 5. ILLUMINATION VOLTAGE:
  - 1.8V FORWARD (ORANGE), 2.8V REVERSE (GREEN)
  - 6. CONTACT RESISTANCE:  $50m\Omega$  MAX. @ 1A 12VDC
  - 7. INSULATION RESISTANCE: 1,000MΩ @ 500VDC
  - 8. DIELECTRIC STRENGTH: 2,000VAC MIN. FOR 1 MINUTE
- 9. ELECTRICAL LIFE: 50,000 CYCLES
- 10. OPERATING TEMPERATURE: -20°C to 55°C
- 11. INGRESS PROTECTION: IP65
- 12. SUPPLIED HARDWARE: O-RING AND HEXNUT
- 13. ▲ DENOTES CRITICAL PARAMETER
- 14. 2011/65/EU (ROHS) COMPLIANT

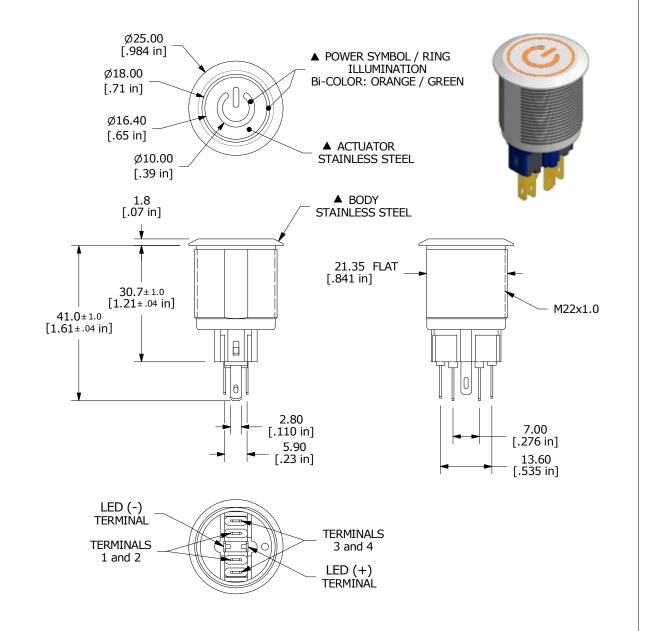

В	22937 update Ring Illum. Thickness		7/24/17	MW	
Α	22826	RELEASE FOR PRODUCTION	5/2/17	MW	
REV	PCR NO DESCRIPTION		DATE	BY	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					

E+SWITCH*							
TITLE PV7F2Y0SS-3K1-M03							
SCALE 1:1	DATE 5/2/2017	DR MW	DWG 52-PV7F2Y0SS3K1M03	REV B			

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Pushbutton Switches category:

Click to view products by E-Switch manufacturer:

Other Similar products are found below:

8940K2012 LW1L-M1C10V-A LW1L-M1C70-A LW2L-A1C20M-GD LW2L-M1C20M-A 60324L M22-D-R-GB0/K11 M7E-HRN2 67021K512 67081K512X 701PB580 7190K101 7199K101 810K12910 810KSV30B MML21EA2ADK MML21KA3ABK MML23KA3AC05K-001 MML23KW3AA01W 8418K2 8442K3 8450K1 860K11911T01A 861901 861K11911T01A07 861K13810T00A14 861K13911 8646AB6X718UL 8646ABUL 9001KXRK 907AYY100 PMHD155A1 95-313.000 9533CD4+U574+U4922 95-414.000 99-450.837 99-453.837 PV3H2B0NN-341 1203MRA A22NZBGANGA A22NZBMMNGA A22NZBNANGA A22NZBMANGA A22NZBMA1X03EC56 A3A-5123-02 A3A-7140 A3A-7340 A3U-TMW-A2C-5M A595