## **SERIES TL 6190 SWITCHES**

TACT SWITCHES - SEALED RIGHT ANGLE



## **FEATURES & BENEFITS**


- Reliable dome technology
- Strong tactile force
- Multiple operating force
- Process sealed
- Right angle
- **APPLICATIONS/MARKETS**
- Telecommunications
- Consumer electronics Audio/visual

1.15 [.045 in]

- Medical equipment
- Computer/servers/peripherals

Contact Rating:	50mA@12 VDC
Life Expectancy (Mechanical): Life Expectancy (Electrical):	100,000 cycles 100,000 cycles
Contact Resistance:	100m $\Omega$ max. intial
Insulation Resistance:	100MΩ (Min@ 100V)
Dielectric Strength:	500 VDC
Actuation Force:	220 ± 60 gf
Operating Temperature (Switch Operating Temperature (Button)	•
Travel:	0.50 ± 0.20 mm
MATERIALS	


Nylon
Stainless Steel
Silicone rubber
Tin, plated
Copper alloy, plated
Copper alloy, plated

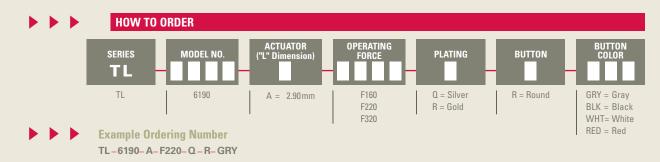


SPECIEICATIONS

TL 6190



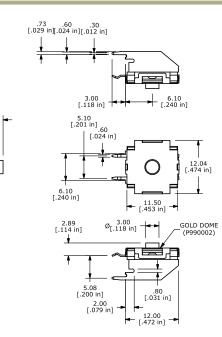

Specifications subject to change without notice.



TACT SWITCHES

NAVIGATION SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

ROCKER SWITCHES

SLIDE SWITCHES

SNAP-ACTION SWITCHES

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Switch Bezels / Switch Caps category:

Click to view products by E-Switch manufacturer:

Other Similar products are found below :

 896809000
 LW1A-B2-R
 LW2A-B1-G
 704.604.4
 704.955.3
 F1403
 7527
 760203000
 766601000
 785105000
 785106000

 79211759
 MG12KB
 MH11
 MH13
 MHU31
 MJ1216
 MJ1226
 MJ33
 MJ612
 MJ626
 MJ627
 9001T8BK
 908-1634
 92-343.200
 92-343.400

 95804.920
 95CAP-011
 95CAP-112
 11-932.7
 99-901.9
 99-902.9
 99-909.4
 99-909.5
 99-920.8
 A0261A
 11-931.2
 11-932.5
 11-936
 11-937

 AKTSC22B
 AW-RF8
 161006
 1825068-6
 184-1872
 187-1872
 188-1471
 1DFBLK
 1D-GRY