



DTA-SX-W-C2-II

24W




FEATURES:




- High reliability
- 100% burn-in tested
- 100% Hi-pot tested
- Safety Approvals, EMC compliance
- Meets CEC, ERP, EISA, and Energy Star Level V requirements
- No load power consumption <300mW
- Short circuit, over load, over voltage protection



MODEL/CHANNEL		Unit	DTA24-05SX-W-C2-II	DTA24-09SX-W-C2-II	DTA24-12SX-W-C2-II	DTA24-16SX-W-C2-II	DTA24-18SX-W-C2-II	DTA24-24SX-W-C2-II
OUTPUT	Output Voltage	Vdc	5	9	12	16	18	24
	Output Current	A	3	2.66	2	1.5	1.34	1
	Ripple and Noise(max.) *3	mV	50	90	120	160	180	240
	Power	V	24					
	Voltage Adjustment Range	%	5% of Rated Output Voltage(at no load within the input range)					
	Hold-up time	mS	>10 mS typical					
	Voltage Regulation	mV	+5%/-3%					
MODEL/CHANNEL		Unit	DTA24-36SX-W-C2-II		DTA24-48SX-W-C2-II			
OUTPUT	Output Voltage	Vdc	36		48			
	Output Current	A	0.67		0.5			
	Ripple and Noise(max.) *3	mV	360		480			
	Power	V	24					
INPUT	Input Voltage	Vac	90-264VAC					
	Input Current	A	0.7A max.@ 90VAC		0.35A max.@ 264VAC			
	Input Frequency	Hz	47-63Hz					
	Ripple and Noise	A	1%					
Protection	Over Voltage Protection	-	Latch, AC recycle					
	Over Load Protection	-	Auto-recover					
	Short circuit protection	-	Auto-recover					
Environmental Agencies	Safety	-	CSA 22.2- No.60950-1	NEMKO EN60950-1	CB IEC 60950-1			
	EMC Standards	-	FCC Part 15Class B	CISPR 22 Class B	EN 55022 Class B	CE		
	MTBF	-	>150,000 hours at full load and 25°C ambient temperature					
Environment	Operating Temperature	-	-20°C to +40°C					
	Operating Humidity	-	20~90%					
	Storage Temperature	-	-20°C to +85°C					
Dimension	Size(WxHxD) / Weight	mm/g	80Lx50Wx35H					



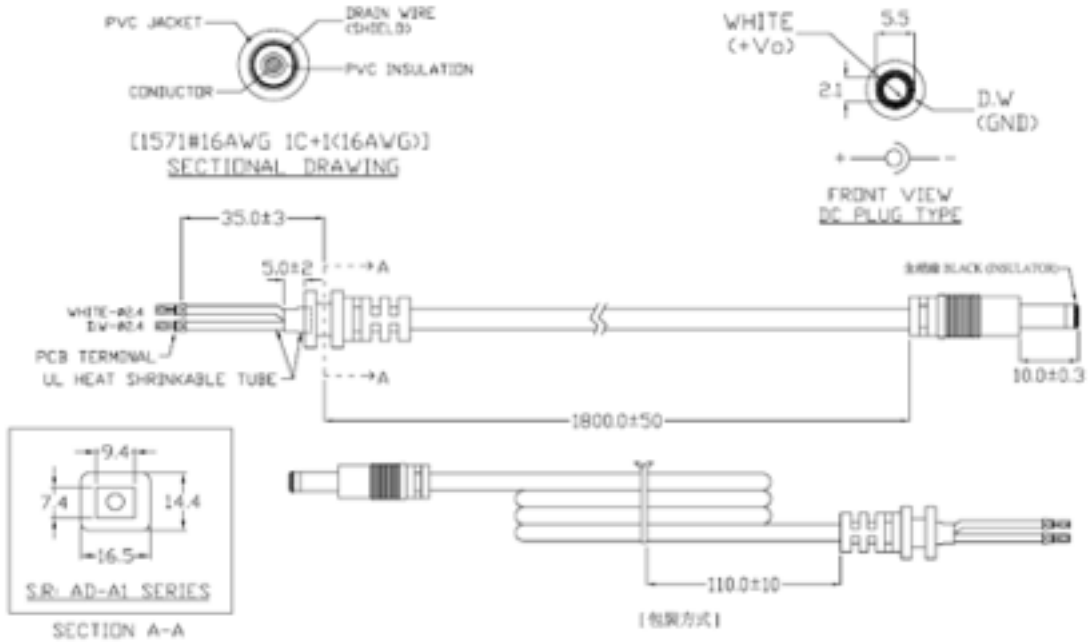

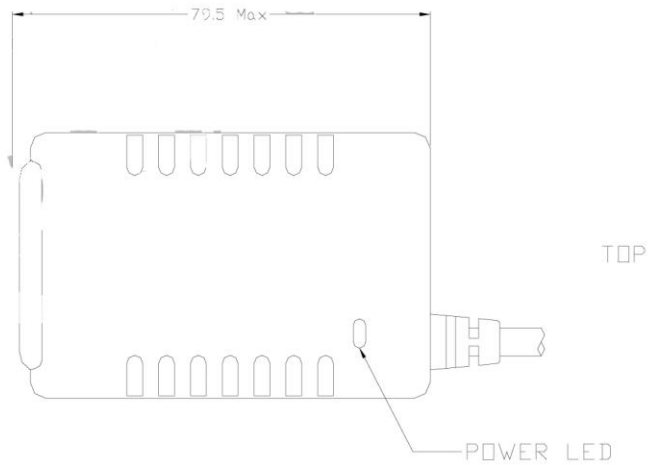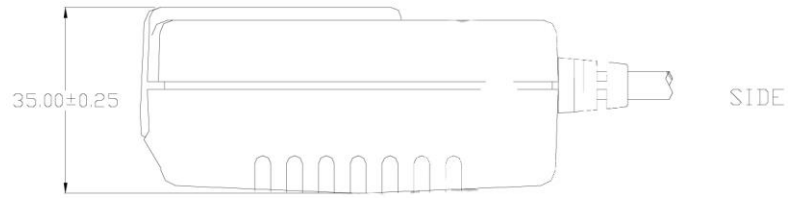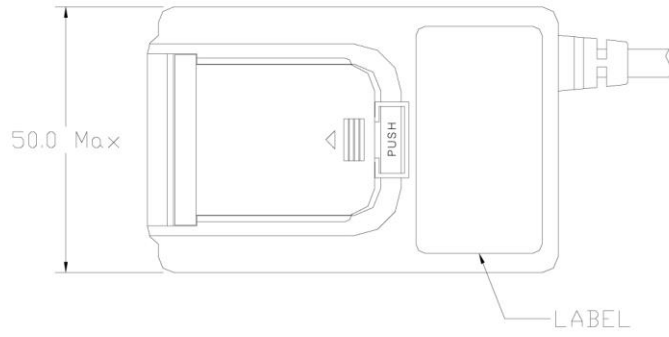

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Desktop AC Adapters](#) category:

Click to view products by [ETA](#) manufacturer:

Other Similar products are found below :

[212A2136](#) [ADP485-01](#) [SWA-1202](#) [SWA-1501](#) [212A2220](#) [KR8-PS01](#) [1894875](#) [FWE050024B-10A](#) [820A4080G](#) [825A0057-03](#) [SWA-1704W](#) [AD5012N2LM-\(401\)](#) [TRH21A120-49E03-Level-VI](#) [FWE050012B-10A](#) [AC-DC ADAPTER 90W w/ Cable](#) [FWA065024A-11A](#) [PSA120U-560L6](#) [96PSA-A63W18V1-M](#) [1895235](#) [PW-C0725-W2-B](#) [57-U1](#) [57-U2](#) [SED80N2-16.0](#) [SED80N3-16.0](#) [RFQ43442-01](#) [YS50-1903150](#) [50966124050E](#) [PCM50UT04](#) [PCM50UT05](#) [CPSUNOTAKY-07056](#) [CPSUNOTAKY-07168](#) [CPSUNOTAKY-07169](#) [CPSUNOTAKY-07234](#) [CPSUNOTAKY-07236](#) [CPSUNOTAKY-07288](#) [CPSUNOTAKY-07312](#) [CPSUNOTAKY-07342](#) [CPSUNOTAKY-07387](#) [CPSUNOTAKY-07388](#) [TE30A0503F01](#) [TE30A4803F01](#) [TE40A2403F01](#) [TE40A2403N01](#) [ME30A1803N01](#) [ME30A4803F01](#) [ME40A1203N01](#) [ME40A2403N01](#) [MENT1150A2451F01](#) [125530040F](#) [1255300611](#)